






环保物料

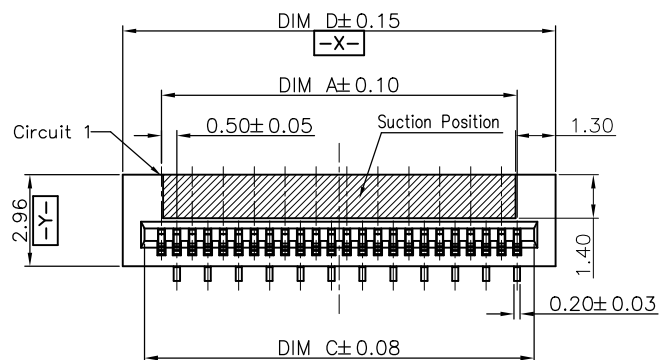

SECTION A-A
SCALE 1:1

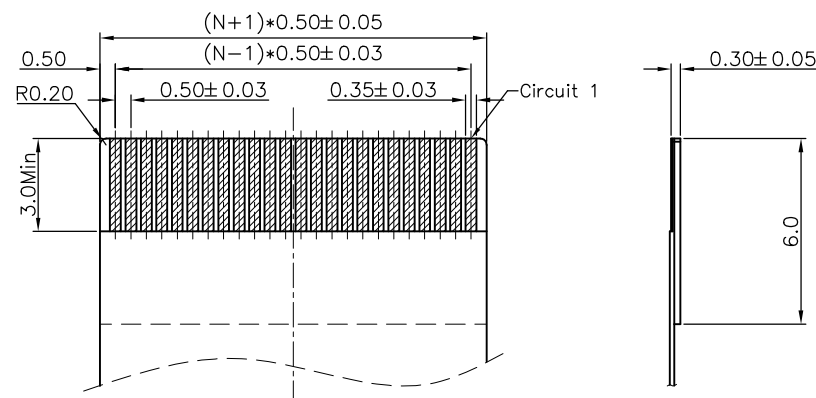

RECOMMENDED FPC/FFC DIMENSION

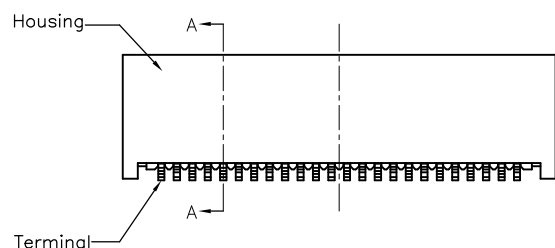

4. Product No:

405A2W00-NPN-S H L XX X X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① Series No.

② W00 :Straight Type

③ No. of Circuits

④ Color: N=Natural

⑤ S: SMT type

⑥ H=HF

⑦ Material: L=LCP

⑧ Plating for contacts:

2E=Matte Tin-plated

contact area

OA=Gold/Flash-plated

contact area

OD=Gold plated 3U"

contact area

⑨ Plating for solder area:

G=Gold Flash

⑩ M=Matte Tin-plated

⑩ R=Reel Backing 1000PCS

F=Reel Backing 1500PCS

Note:

1. Material:

1.1 Housing: thermoplastic high temp.

UL94V-0; Color: natural.


1.2 Terminal: copper alloy.

2. Finsh:

2.1 Terminal:

Underplating: Au/matt Tin overall.

3. Product must comply HF RoHS specification.

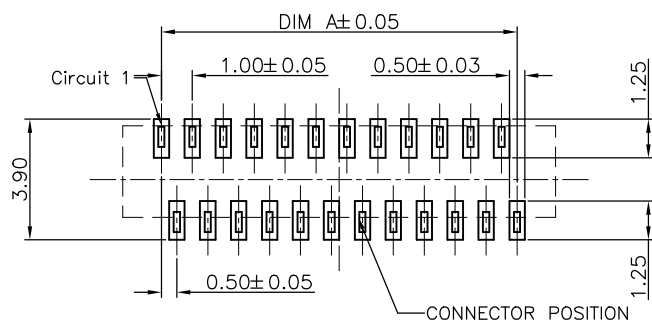

RECOMMENDED P.C.B PATTERN LAYOUT

△A	CKTS	DIM A	DIM C	DIM D
	6	2.50	3.60	5.00
	8	3.50	4.60	6.00
	10	4.50	5.60	7.00
	12	5.50	6.60	8.00
△A	14	6.50	7.60	9.00
△A	16	7.50	8.60	10.00
△A	20	9.50	10.60	12.00
△A	22	10.50	11.60	13.00
△A	28	13.50	14.60	16.00
△A	30	14.50	15.60	17.00
△A	32	15.50	16.60	18.00

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	JCTC®				
A0	新图面发行	20.11.18		LINEAR	ANGLES	APPROVED	Frey Yang	24.04.25	405A2W00-NPN-SHLxxxx	ENDE05					
A7	增加规格	23.05.31		0.0±0.25	X° REF±6°	DESIGNER	Daniel Dong	24.04.25	TITLE 0.5Pitch H=4.0 FPC Non-ZIF S/A Reverse SMT CONN						
A8	增加规格	24.04.23		UNIT: MM	0.00±0.20	X° ±3°	DRAWN	Daniel Dong							24.04.25
A9	增加规格	24.04.25		SIZE: A4	0.000±0.10	X° X' ±2°									
											REV	A9	SHEET	1/1	