

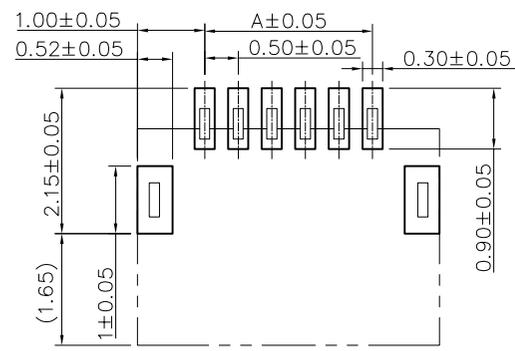


Notes:
 Withstand Voltage : 50V AC/minute
 Contact Resistance : 100mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

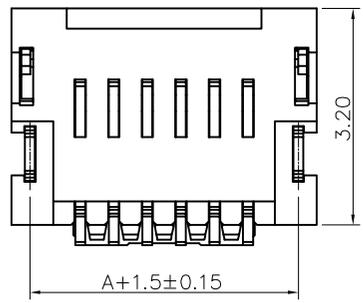

SERIES No. 40501 W R-1 XX A-OD R 03 SERIAL No.
 W: FEMALE HF: REEL
 R: SMT 90° OD-Au 4u"
 1: SINGLE ROW A: BLACK
 XX: P No.

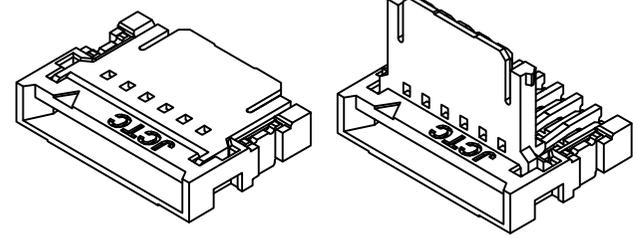

NO. OF POS.	A	B	C
3	1.0	3.0	2.1
4	1.5	3.5	2.6
5	2.0	4.0	3.1
6	2.5	4.5	3.6

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR: BLACK
2	ACTUATOR		1	HEAT RESISTING PLASTIC		UL94V-0 COLOR: WHITE
3	CONTACT		N	PHOS-BRONZE		t=0.15 Au: 0.1um Min connect area/ gold flash on sold area.
4	ANCHOR PLATE		2	BRASS		t=0.15 Sn-Cu: 2um MIN.

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DRW NO.	JCTC TERMINAL&CONNECTORS			
AO	New drawing	2022.07.25	LINEAR	1:1	Frye Yang	2022.07.25	40501WR-1XXA-ODR03	ENDE05				
			ANGLES		Daniel Dong	2022.07.25	TITLE		REV	XO	SHEET	1/1
			UNIT: MM		Daniel Dong	2022.07.25	FPC 0.50mm PITCH 90° SMT					

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C

D

E

F


G

H




NOTE

1. QUANTITY: 5000 ea/reel

2. REELING DIRECTION IN DELIVERY






3. USER DIRECTION OF FEED

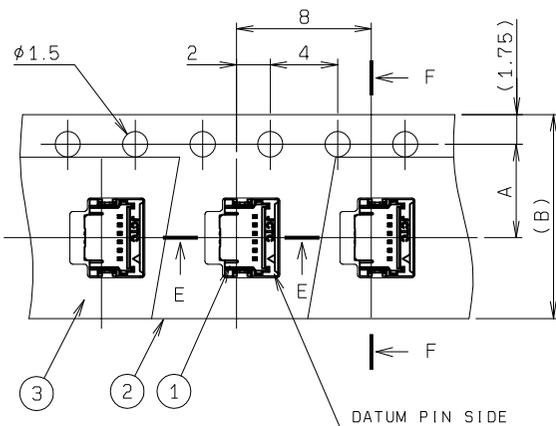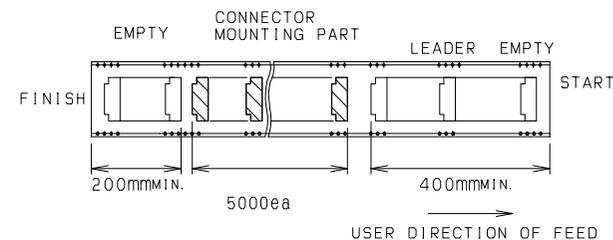



NO. OF POS.	A	B	C
3	5.5	12.0	16.0
4	5.5	12.0	16.0
5	5.5	12.0	16.0
6	5.5	12.0	16.0

※THIS CHART IS APPLICABLE TO SHEET-3 ONLY.

NO.	DESCRIPTION	QTY	CARTON/R	CARTON/PCS
1	CONNECTOR	5000	15 Reel	75000 PCS
2	EMBOSSSED TAPE	1		
3	TOP COVER TAPE	1		
4	REEL	1		

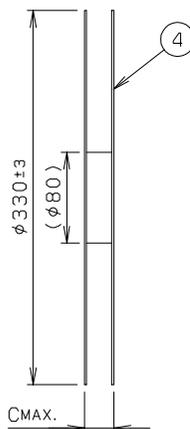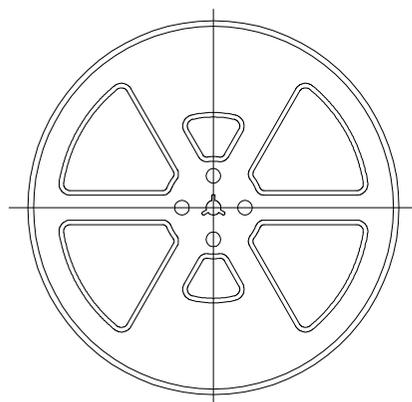

REEL DIMENSION (S=1:5)

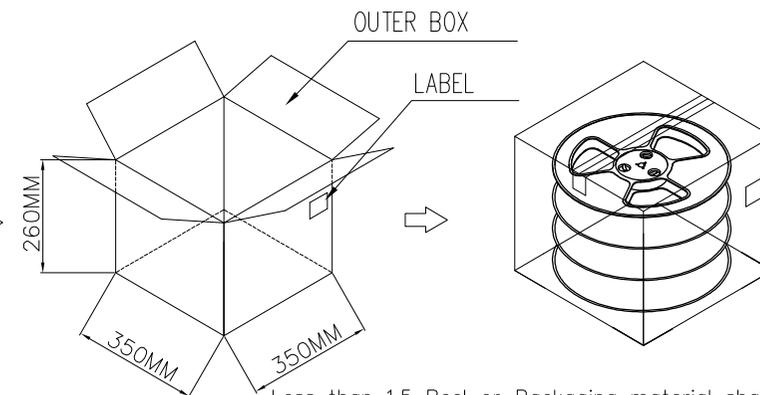

Less than 15 Reel or Packaging material shaking
The carton need to be filled

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	New drawing	2022.11.08		LINEAR	ANGLES	APPROVED			40501WR-1XXK-ODR03	ENDE05				
			0.00±0.15	X° ±3°	DESIGNER			TITLE						
			SIZE: A4	0.00±0.08	X° X' ±2°	DRAWN			FPC(后掀式) 0.50mm PITCH 90° SMT		REV	XO	SHEET	1/1

1 2 3 4 5 6 7 8