
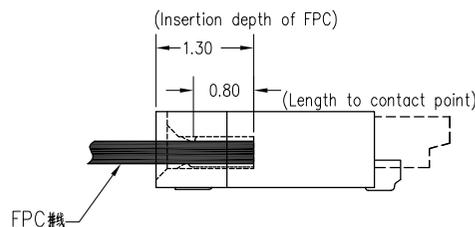
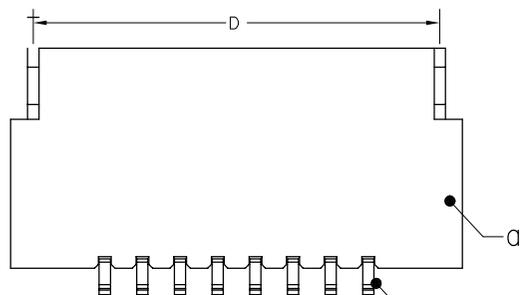
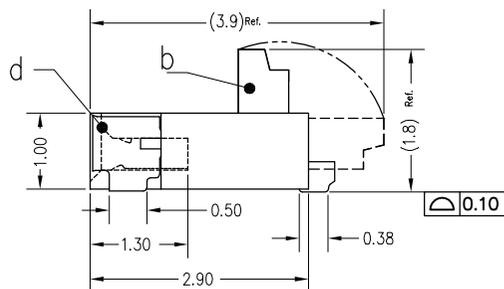
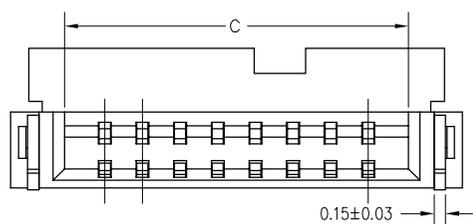
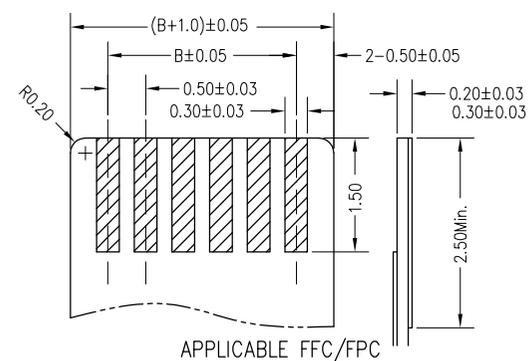
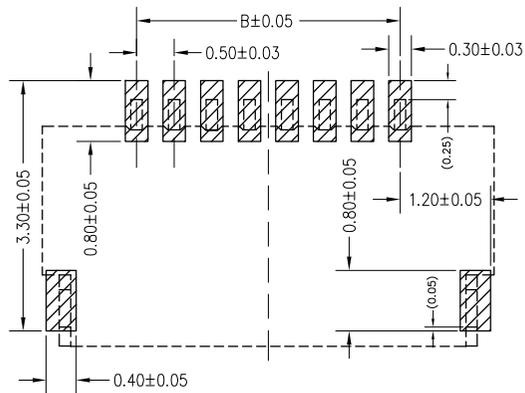


环保物料

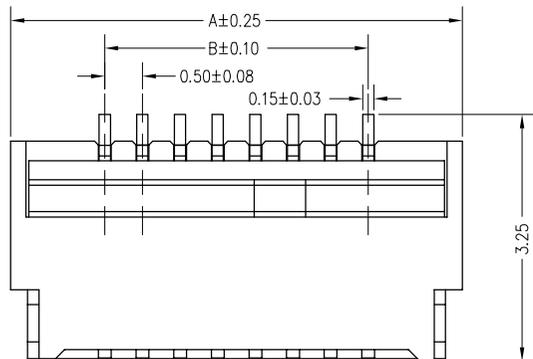

Current Rating : 0.5A AC,DC
 Voltage Rating : 50V AC/DC
 Withstand Voltage : 250V AC/minute
 Contact Resistance : 30mΩ(MAX.)
 Insulation Resistance : 100MΩ(MIN.)
 Temperature Range : -25°C~+85°C

40506W90-NPx-SHL0A TCR-D9

- ① Series No.
- ② W90 : Right angle
- ③ No. of Circuits
- ④ Color: A=Black&0.3mm FFC线
Color: G=Blue&0.2mm FFC线
Color: B=Blue&0.2mm FFC线
- ⑤ S: SMT type
- ⑥ H=Halogen Free
- ⑦ Material: L=LCP
- ⑧ Plating for contacts:
OA=Gold-flash on contact area
- ⑨ Plating for solder area:
T=Tin Plating
- ⑩ Assembly Style
C=Turned up actuator the back
- ⑪ R=Tape & Reel

Part No.	Dimensional Information:			
	A	B	C	D
4P	4.00	1.50	2.57	3.40
5P	4.50	2.00	3.07	3.90
6P	5.00	2.50	3.57	4.40
7P	5.50	3.00	4.07	4.90
8P	6.00	3.50	4.57	5.40
9P	6.50	4.00	5.07	5.90
10P	7.00	4.50	5.57	6.40
12P	8.00	5.50	6.57	7.40
14P	9.00	6.50	7.57	8.40
16P	10.00	7.50	8.57	9.40
18P	11.00	8.50	9.57	10.40
20P	12.00	9.50	10.57	11.40
22P	13.00	10.50	11.57	12.40
24P	14.00	11.50	12.57	13.40
26P	15.00	12.50	13.57	14.40
28P	16.00	13.50	14.57	15.40
30P	17.00	14.50	15.57	16.40
32P	18.00	15.50	16.57	17.40
34P	19.00	16.50	17.57	18.40
36P	20.00	17.50	18.57	19.40
38P	21.00	18.50	19.57	20.40
40P	22.00	19.50	20.57	21.40
42P	23.00	20.50	21.57	22.40
45P	24.50	22.00	23.07	23.90
50P	27.00	24.50	25.57	26.40


	Description	Material	Color/Finish
a	Housing	LCP,UL94V-0	Natural
b	Actuator	PA9T,UL94V-0	Black/Blue
c	Terminal	Phosphor Bronze	Gold Flash
d	LEG	Phosphor Bronze	Matte Tin Plating Over Ni

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新版发行	17.01.18	LINEAR	ANGLES	1:1	Frey Yang	24.10.16	40506W90-NPx-SHLOATCR-D9	ENDE05				
A1	更新抬头发行	20.08.21	0.0±0.30	X° REF±6°	APPROVED	Michael Dong	24.10.16	TITLE					
A2	更换图框发行	24.10.16	0.00±0.25	X° ±3°	DESIGNER	Janny	24.10.16	FPC 0.5 Pitch 1.0H ZIF R/A Connector					
			SIZE: A4	0.000±0.15	X° X' ±2°	DRAWN				REV	A2	SHEET	1/2



环保物料

NOTE:

- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1mm in 100mm.
3. Material: black conductive polystyrene alloy.
4. Material Thickness: 0.3 ± 0.05 mm.
5. All dimensions meet EIA-481-B requirements.
6. 4000pcs Pef Reel.
7. For tape width(dim W)16 and 24mm pilot holes are provided on one sides. For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

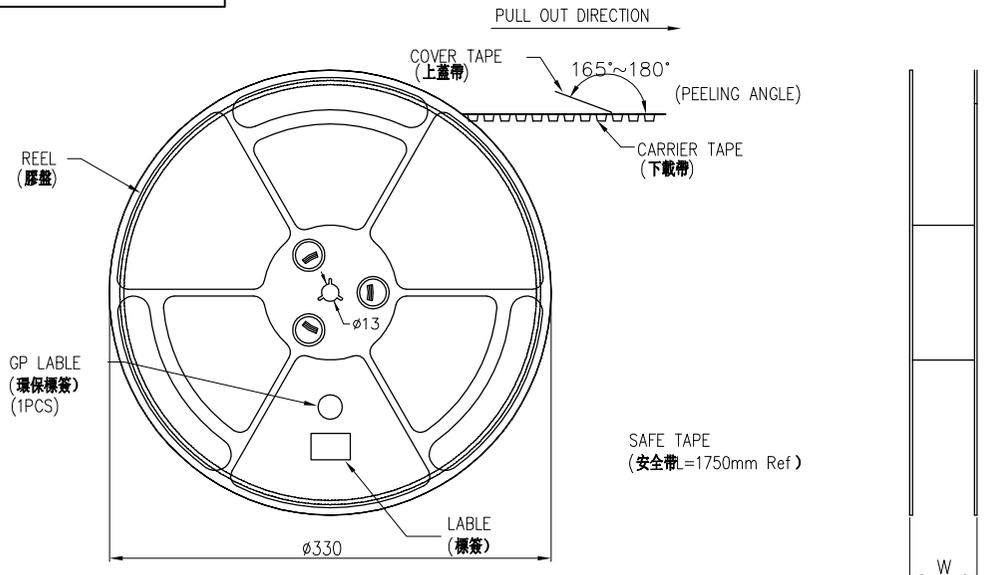


SCALE 1:4

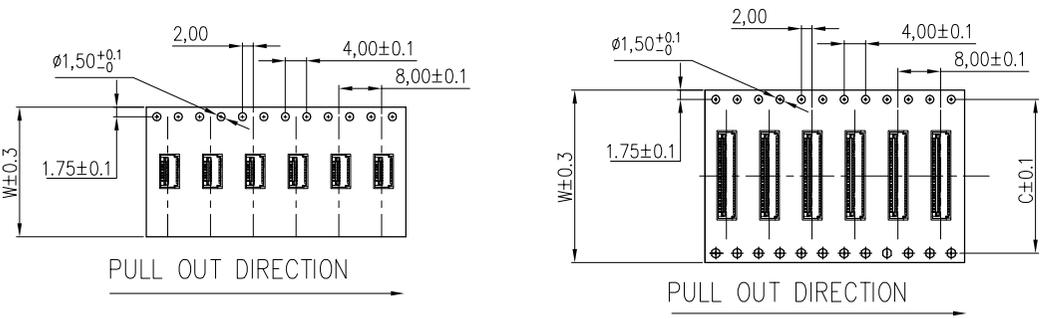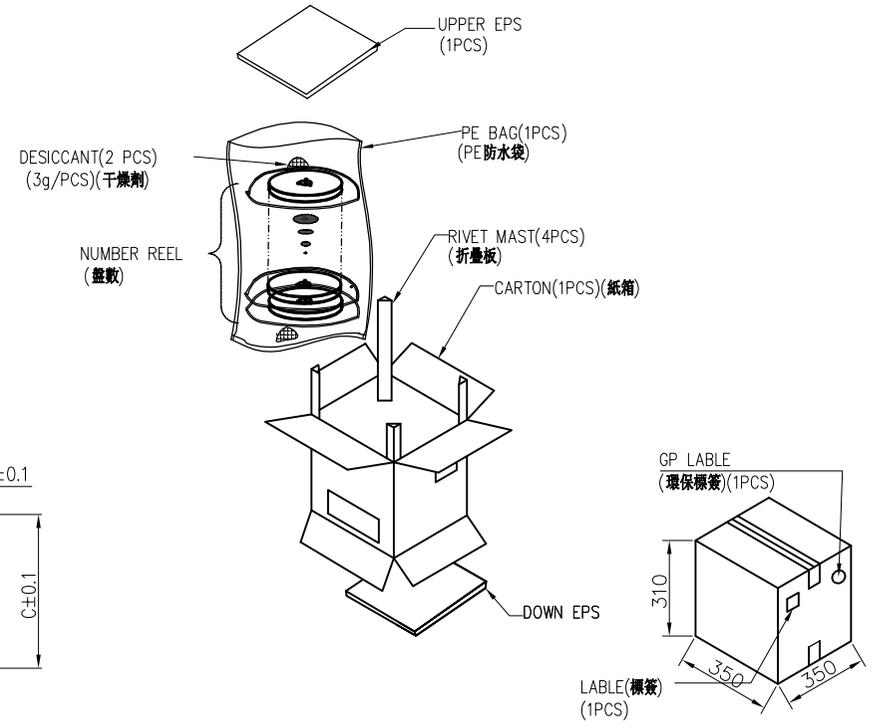

PULL OUT DIRECTION

PULL OUT DIRECTION

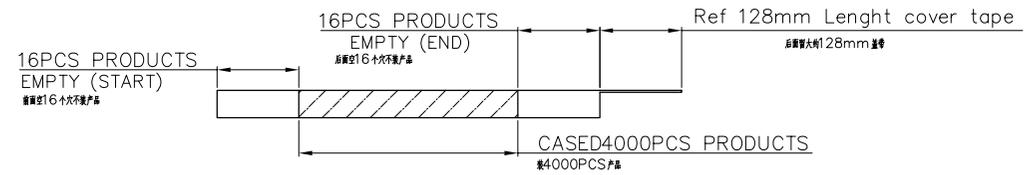

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
04PIN~14PIN	16	-	4000	14	56000
15PIN~27PIN	24	-	4000	9	36000
28PIN~39PIN	32	28.4	4000	7	28000
40Pin~50PIN	44	40.4	4000	5	20000

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新发行	17.06.12		LINEAR	ANGLES	1:1								
A1	更换图框发行	24.06.12	UNIT: MM	0.00 \pm 0.20	X° REF \pm 6°	DESIGNER			TITLE		REV	A1	SHEET	2/2
			SIZE: A4	0.00 \pm 0.10	X° X' \pm 1°	DRAWN	zhang peng	24.06.12	FPC 0.5 Pitch 1.0H ZIF R/A Connector					