
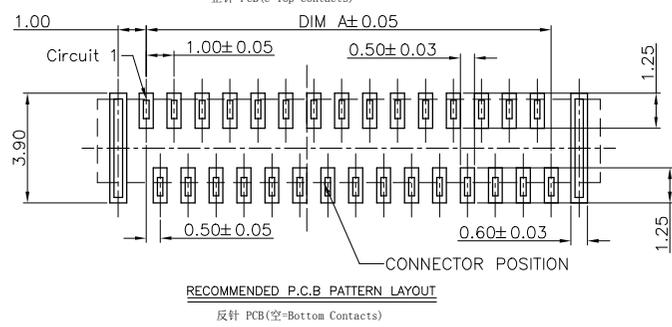
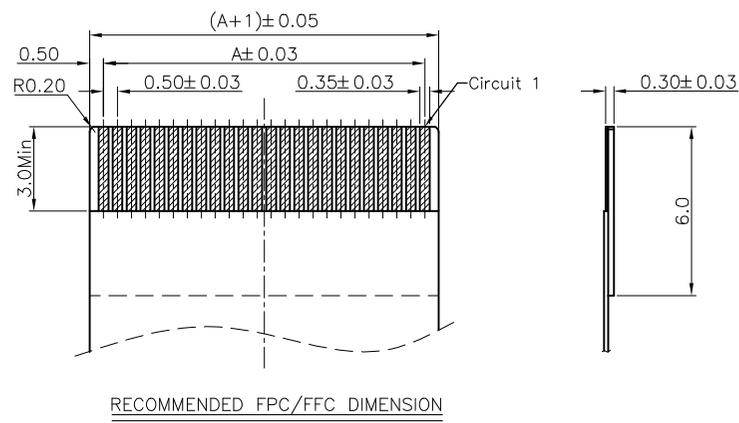


Note:
 1. Material:
 1.1 Housing: LCP.UL94V-0; Color: natural.
 1.2 Terminal: C5191-EH.
 1.3 Leg: C2680.
 2. Electrical Characteristic
 2.1 Voltage Rating : 50V AC/DC
 2.2 Current Rating : 0.5A AC,DC
 2.3 Withstand Voltage : 250V AC/minute
 2.4 Contact Resistance : 30mΩ(MAX.)
 2.5 Insulation Resistance : 100MΩ(MIN.)
 3. Temperature Range : -25°C~+85°C
 4. Finish:
 4.1 Terminal: Underplating: Au/matt Tin overall.
 5. Product must comply HF RoHS specification.
 6. Product No:

405A4W00-NPN-S H L OD G X R

- ① Series No.
- ② W00 :Straight Type
- ③ No. of Circuits
- ④ Color: N=Natural
- ⑤ S: SMT type
- ⑥ H=HF
- ⑦ Material: L=LCP
- ⑧ Plating for contacts:
OD=Gold plated 3u" contact area
- ⑨ Plating for solder area:
G=Gold Flash
- ⑩ Assembly Style
U=Top Contacts
空=Bottom Contacts
- ⑪ R=Reel Backing





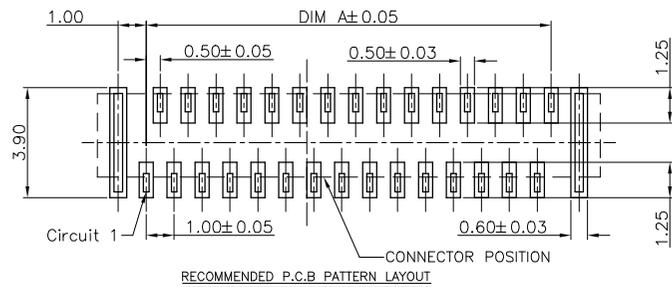


CKTS	DIM A	DIM B	DIM C	DIM D
6	2.50	4.50	3.60	6.00
8	3.50	5.50	4.60	7.00
10	4.50	6.50	5.60	8.00
12	5.50	7.50	6.60	9.00
14	6.50	8.50	7.60	10.00
16	7.50	9.50	8.60	11.00
26	12.50	14.50	13.60	16.00
30	14.50	16.50	15.60	18.00

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.03.19	LINEAR	1:1	董东平	24.10.09	405A4W00-NPN-SHL0DGXR	ENDE05
A1	为避免出现顶锡异常, 对塑胶进行减胶改善	22.04.13	0.0±0.25		马 仟	24.10.09	TITLE 0.5Pitch H=4.0 FPC Non-ZIF S/A Reverse SMT CONN	
A2	新增规格	24.10.09	0.00±0.15		张 棚	24.10.09		
			0.00±0.08					




JCTC®

REV	A2	SHEET	1/1
-----	----	-------	-----

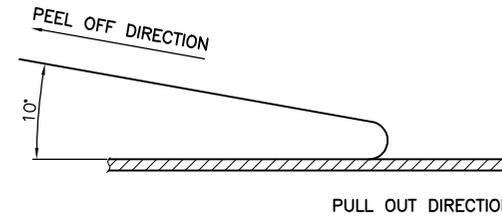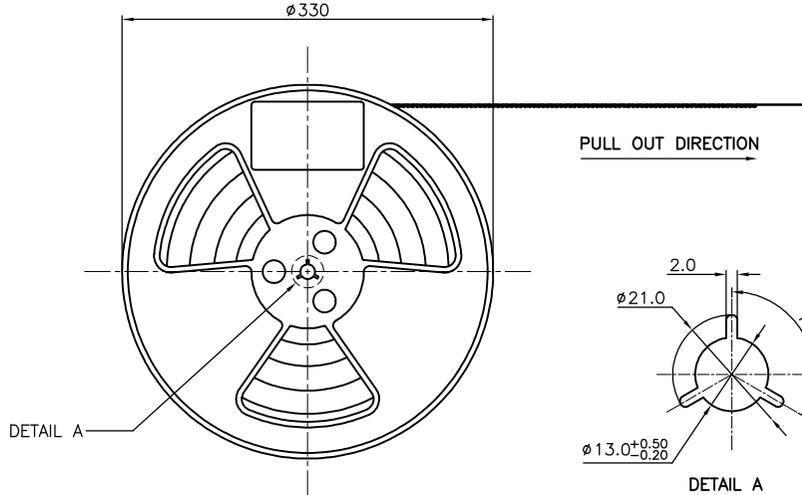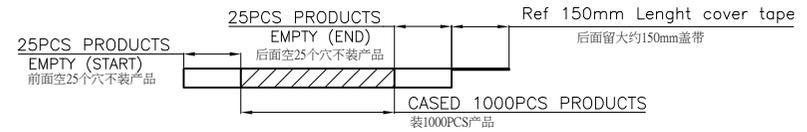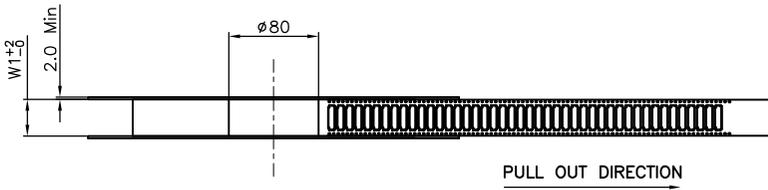

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.20\text{mm}$
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 250mm.
3. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
4. MATERIAL: BLACK ANTI-STATIC POLYSTYRENE.
5. THICKNESS: $0.35 \pm 0.05 \text{ mm}$.
6. PACKING LENGTH PER 13" REEL: 12.60METERS.
7. COMPONENT LOAD PER 13" REEL: 1000PCS
8. PEELING OFF FORCE OF TOP TAPE 0.1N~0.7N(10.2gf~71.4gf).

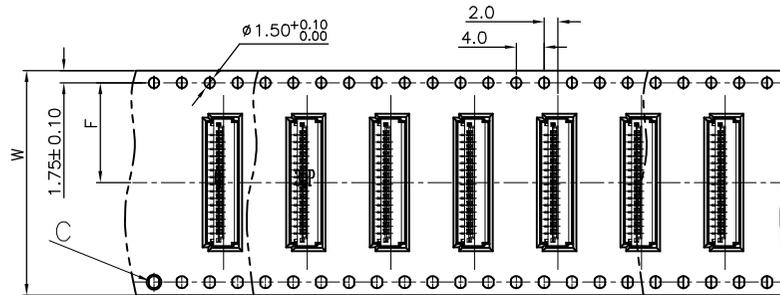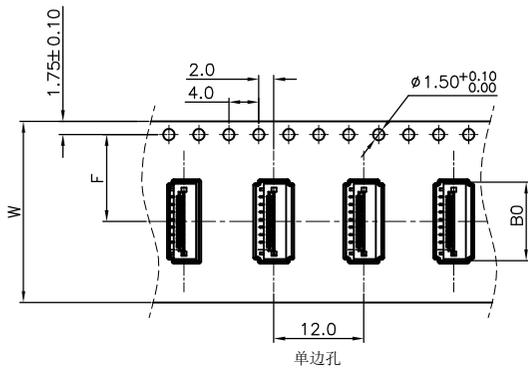

Pin No.	W	F	B0
6PIN	16	7.5	7.3
12PIN	24	11.5	11.3
14PIN	24	11.5	12.3
16PIN	24	11.5	13.3
26PIN	24	11.5	18.3
30PIN	32	14.2	20.3

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
A0	新图面发行	21.03.19	LINEAR	ANGLES	1:1	董东平	24.10.09	405A4W00-NPN-SHL0DGXR	ENDE05
A1	为避免出现顶锡异常, 对塑胶进行减胶改善	22.04.13	0.0 ± 0.25	$X^\circ \text{ REF} \pm 6^\circ$	APPROVED	马 仟	24.10.09	TITLE 0.5Pitch H=4.0 FPC Non-ZIF S/A Reverse SMT CONN	REV A2 SHEET 1/1
A2	新增规格	24.10.09	0.00 ± 0.15	$X^\circ \pm 3^\circ$	DESIGNER	张 棚	24.10.09		
			SIZE: A4	$X^\circ X' \pm 2^\circ$	DRAWN				

