


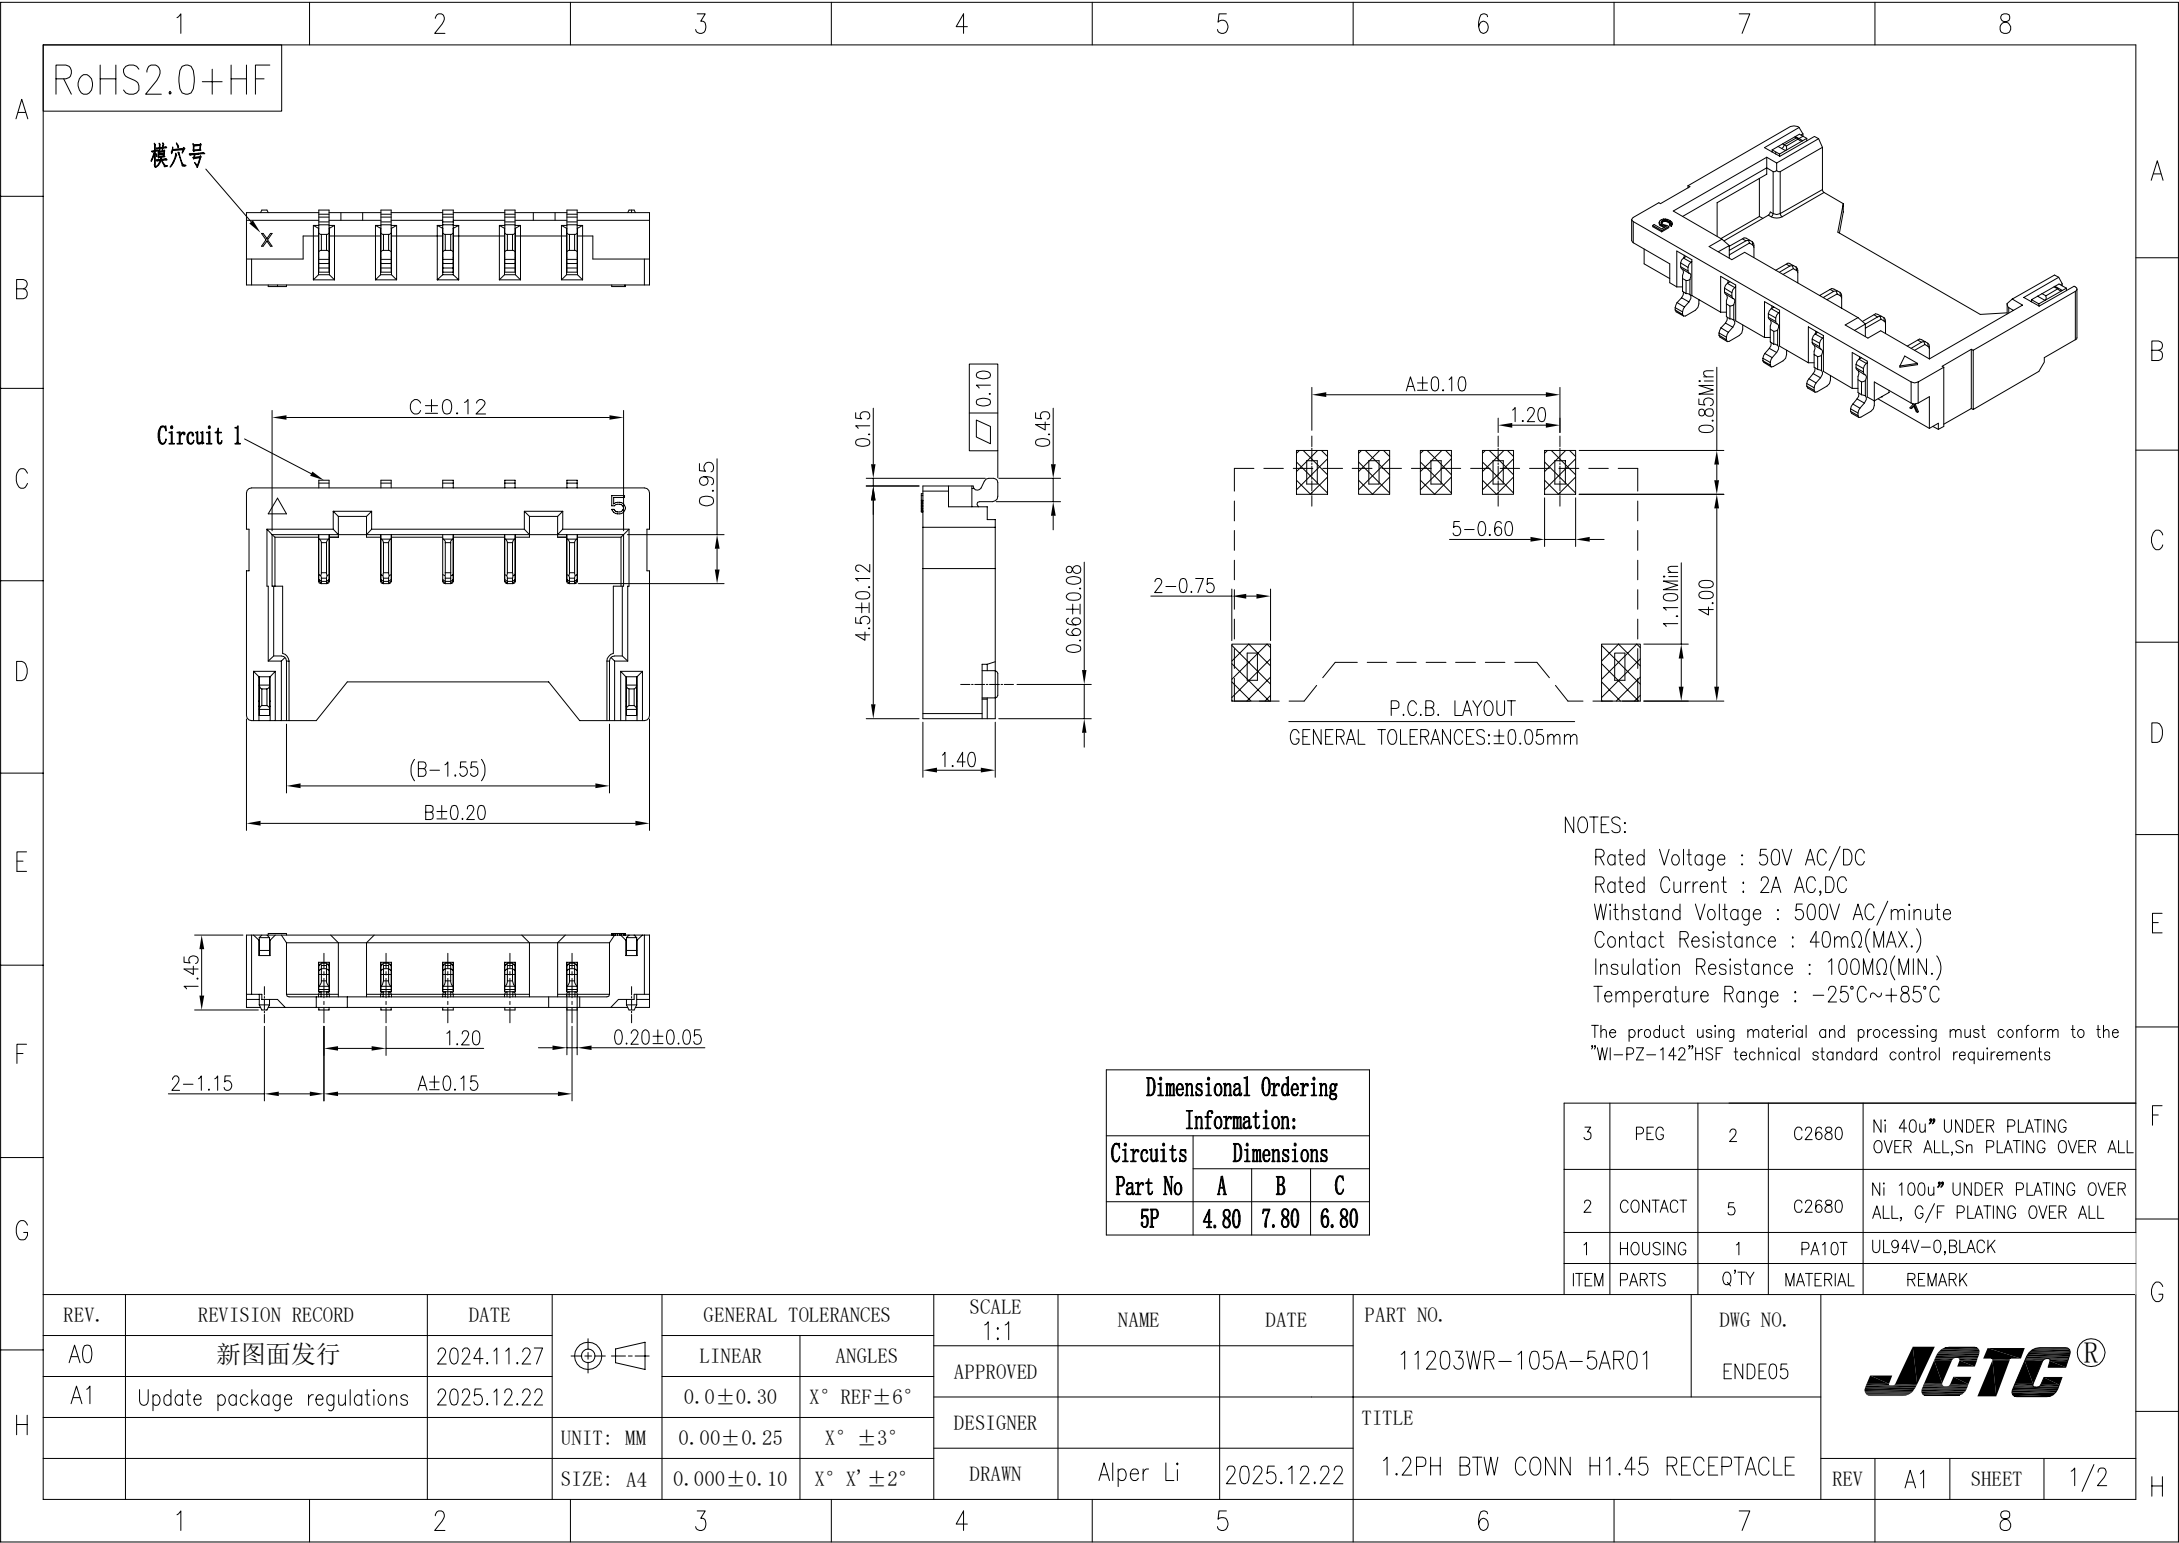

NOTES:

Rated Voltage : 50V AC/DC
Rated Current : 2A AC/DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 40mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -25°C~+85°C

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Dimensional Ordering Information:			
Circuits	Dimensions		
Part No	A	B	C
5P	4.80	7.80	6.80

3	PEG	2	C2680	Ni 40u" UNDER PLATING OVER ALL,Sn PLATING OVER ALL
2	CONTACT	5	C2680	Ni 100u" UNDER PLATING OVER ALL, G/F PLATING OVER ALL
1	HOUSING	1	PA10T	UL94V-0,BLACK
ITEM	PARTS	Q'TY	MATERIAL	REMARK

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	2024.11.27		LINEAR	ANGLES	1:1			11203WR-105A-5AR01	ENDE05				
A1	Update package regulations	2025.12.22		0.0±0.30	X° REF±6°	APPROVED								
				0.00±0.25	X° ±3°	DESIGNER			TITLE					
			UNIT: MM	0.00±0.25	X° ±3°				1.2PH BTW CONN H1.45 RECEPTACLE		REV	A1	SHEET	1/2
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Alper Li	2025.12.22						

