RoHS2.0+HF | Customer drawing

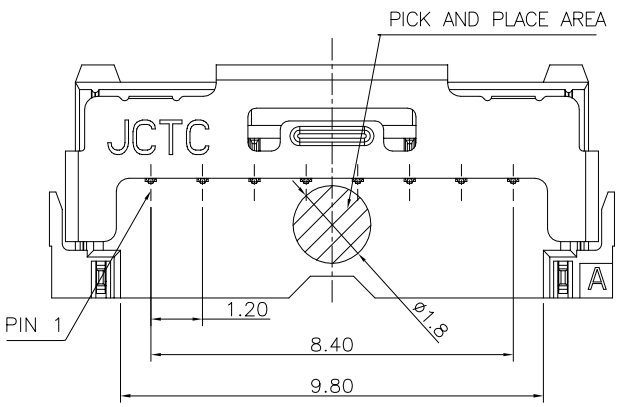

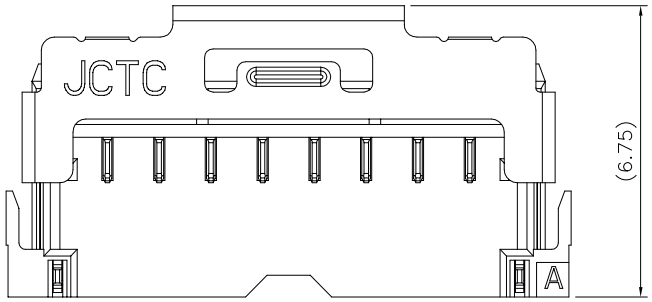

Shell Unlock Condition(REF)

PART No:

11206W90-08 A-S xx R 01
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.
② No. of Circuits
③ A: BLACK
④ S: SMT TYPE
⑤ 5A: Au 1u"
⑥ R: REEL PACKING
⑦ 01: 01 TYPE

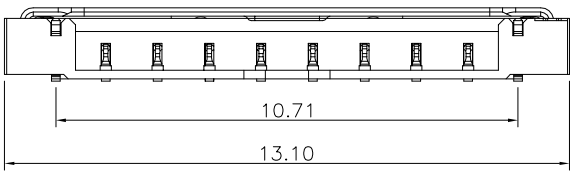



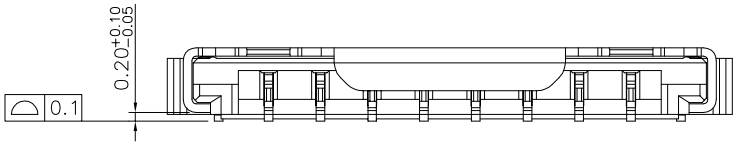

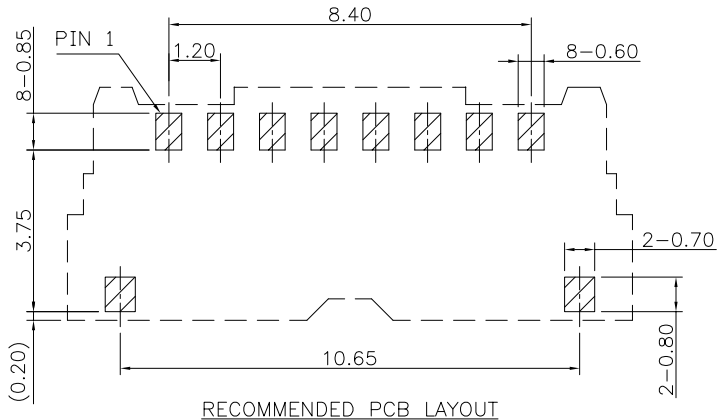

RECOMMENDED PCB LAYOUT
ALL TOLERANCE ARE±0.05(TOP VIEW)

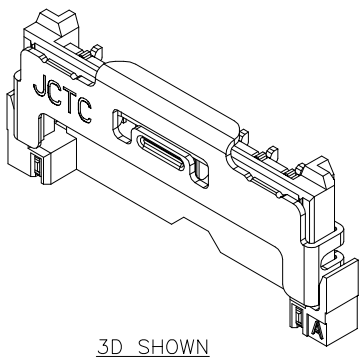

3D SHOWN

Notes:
Housing: High Temperature Thermoplastic UL94 V-0 Black
Contact: Copper Alloy
Peg: Copper Alloy
Shell: Stainless Steel
Rated Voltage : 50V AC/DC
Rated Current : 1.5A AC,DC
Withstand Voltage : 500V AC/minute
current leakage<5mA
Contact Resistance : 20mΩ Max.
Insulation Resistance : 100MΩ Min.
Temperature Range : -25°C~+85°C
☆The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

REV.	REVISION RECORD	DATE
X0	Initial release	2026.05.26

UNIT: MM
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X' ±2°

	NAME	DATE
SCALE 1:1		
APPROVED		
DESIGNER		
DRAWN	Alper Li	2026.05.26

PART NO.	DWG NO.
11206W90-08A-SxxR01	ENDE05

TITLE: 1.2PH BTW CONN H1.65 RECEPTACLE

JCTC®

REV	X0	SHEET	1/2

RoHS2.0+HF | Customer drawing

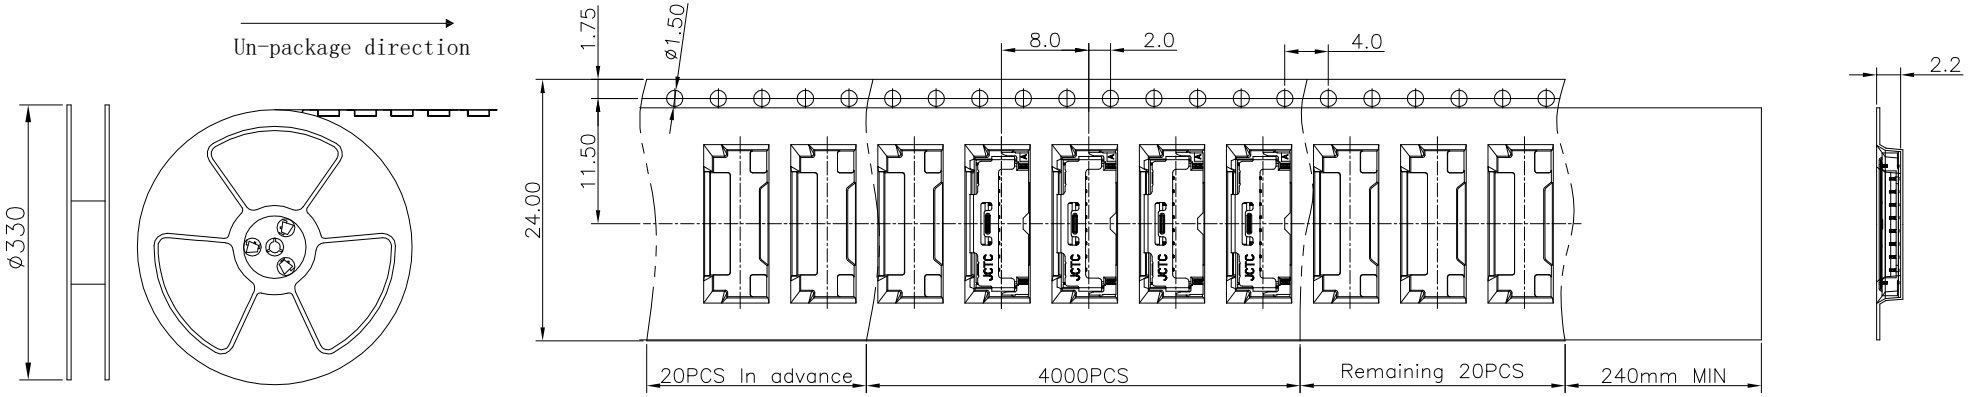

PIN NO.	PCS/TRAY	TRAY/BOX	PCS/BOX
8	4000	9	36000

User direction of unreeling

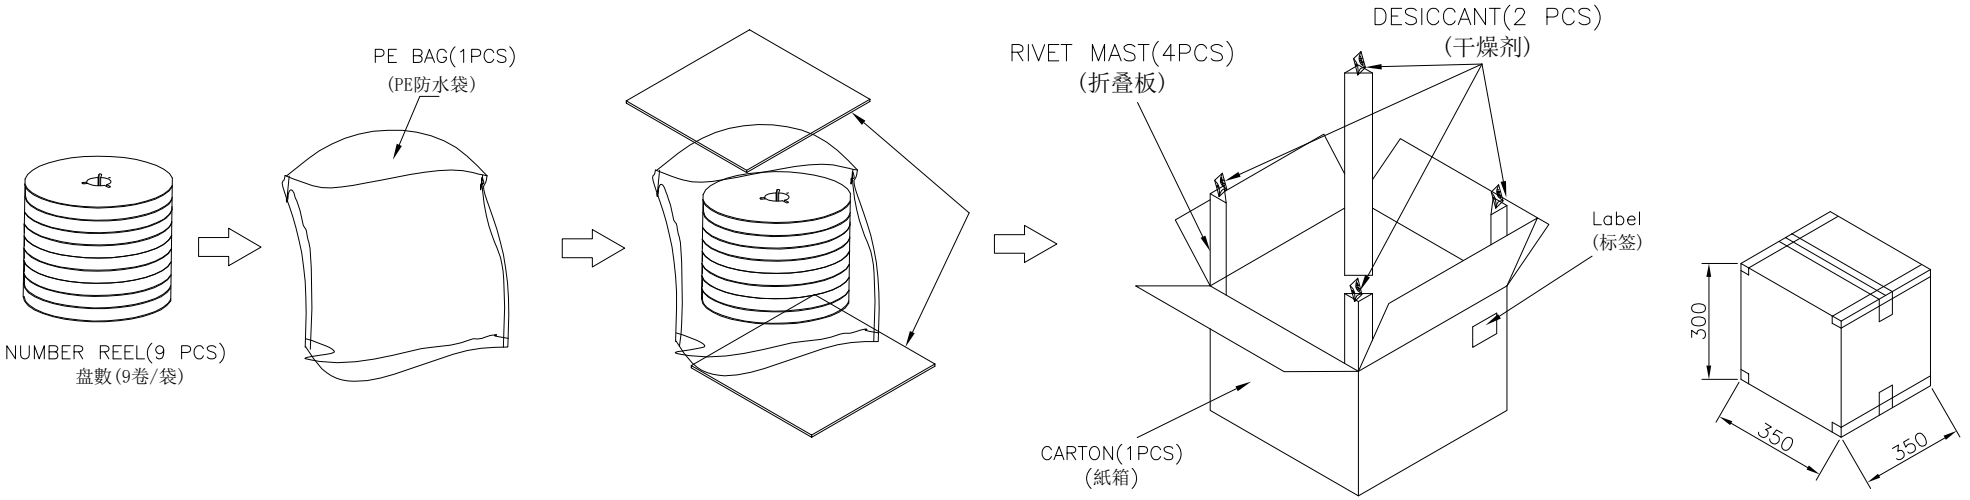

REV.	REVISION RECORD	DATE
X0	Initial release	2026.05.26

UNIT: MM
SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.25	X° REF±6°
0.00±0.15	X° ±3°
0.000±0.08	X° X' ±2°

SCALE 1:1	NAME	DATE
APPROVED		
DESIGNER		
DRAWN	Alper Li	2026.05.26

PART NO.	DWG NO.
11206W90-08A-SxxR01	ENDE05

TITLE: 1.2PH BTW CONN H1.65 RECEPTACLE

JCTC®

REV	X0	SHEET	2/2