


环保物料




SPECIFICATIONS :

Voltage Rating: 600V AC / DC
 Current Rating: 9A AC / DC
 Withstanding Voltage: 1500V AC/minute
 Temperature Range: -25°C~+85°C
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 After environmental testing: 40mΩ Max.


Material:
 Wafer: LCP/PA9T HF UL94V-0,
 Color:WHITE/NATURAL
 Conductor: COPPER ALLOY./Tin Plated

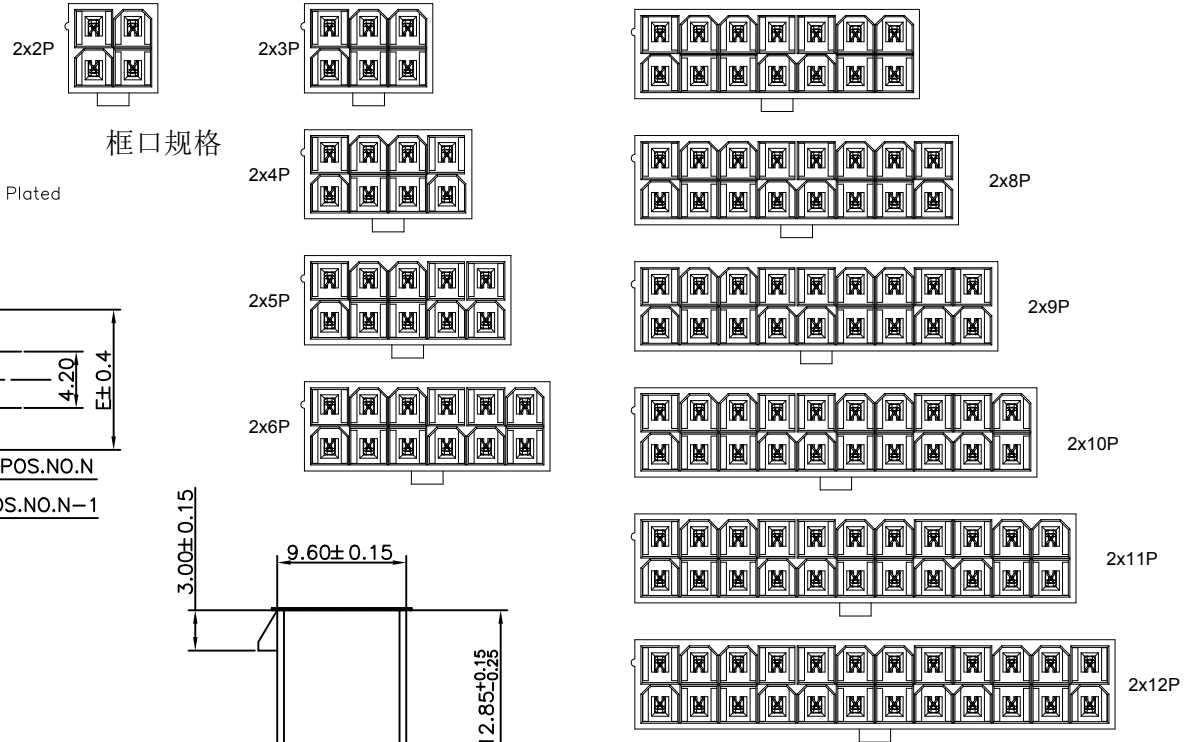

框口规格

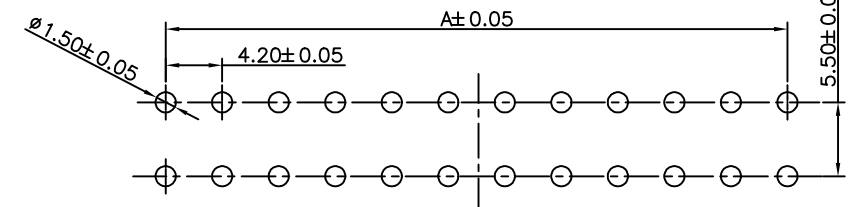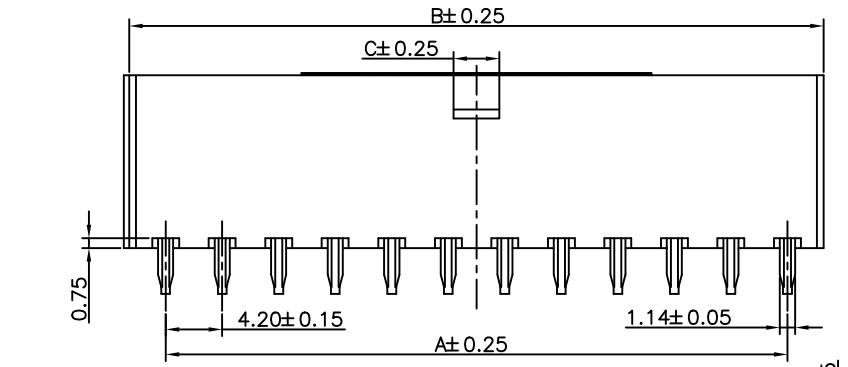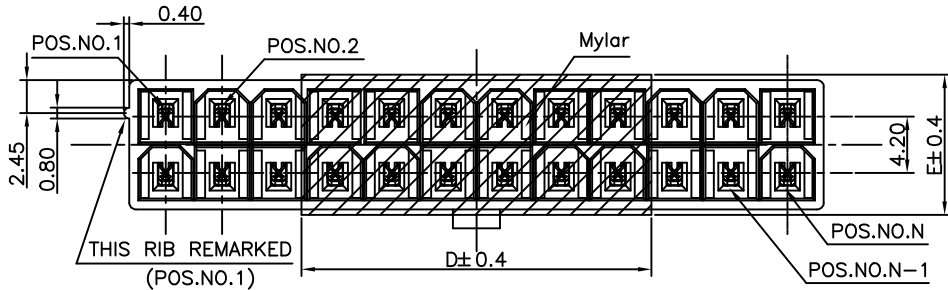

P.C.B LAYOUT
 TOLERANCES:±0.05mm

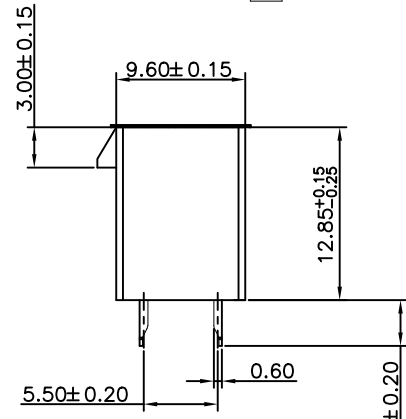

34202W03-2xNPx-Nx-HM

Series No. _____ MYLAR:
 2X7P~2X12P 唛拉规格为10.0mmX26.0mm
 2X2~2X6P 唛拉规格10.4mmX10.4mm
 180度 (胶芯STAND OFF 填平) 无齿
 双排针 空: 挂台C尺寸=3.4, 端子 (C2680)
 单排Pin数 P: 挂台C尺寸=3.4, 端子 (C1814-H)
 空: PA9T本色 N: 无耳
 W: LCP料白色

PIN NO.	Dimensions				
	A	B	C	D	E
2x2P	4.20	9.60	3.40	10.4	10.4
2x3P	8.40	13.80	3.40	10.4	10.4
2x4P	12.60	18.00	3.40	10.4	10.4
2x5P	16.80	22.20	3.40	10.4	10.4
2x6P	21.00	26.40	3.40	10.4	10.4
2x7P	25.20	30.60	3.40	26.0	10.0
2x8P	29.40	34.80	3.40	26.0	10.0
2x9P	33.60	39.00	3.40	26.0	10.0
2x10P	37.80	43.20	3.40	26.0	10.0
2x11P	42.00	47.40	3.40	26.0	10.0
2x12P	46.20	51.60	3.40	26.0	10.0
2x12P	46.20	51.60	46.20	26.0	10.0

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图纸发行	21.08.17		LINEAR	ANGLES	1:1								
A1	新增PA9T规格	21.10.18	0.00±0.20	X° REF±6°	APPROVED				34202W03-2xNPx-Nx-HM	ENDE05				
			0.00±0.20	X° ±3°	DESIGNER				TITLE					
			0.000±0.08	X° X' ±2°	DRAWN	Dalan Dai	21.10.18		4.20mm PITCH DIP TYPE		REV	A1	SHEET	1/1