
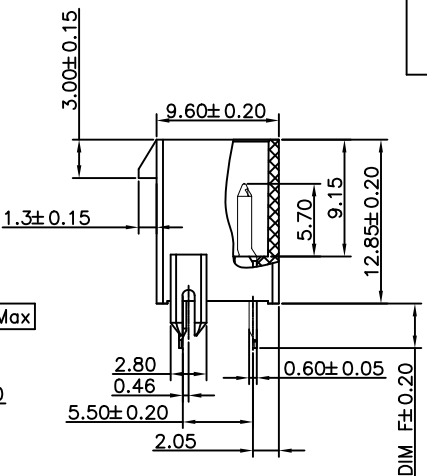
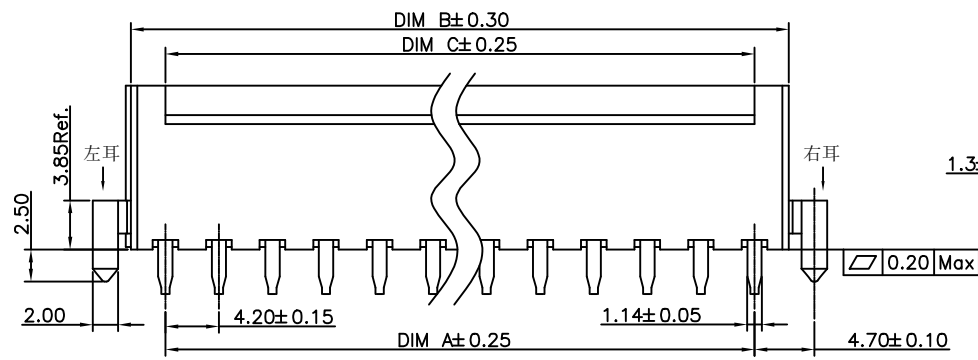
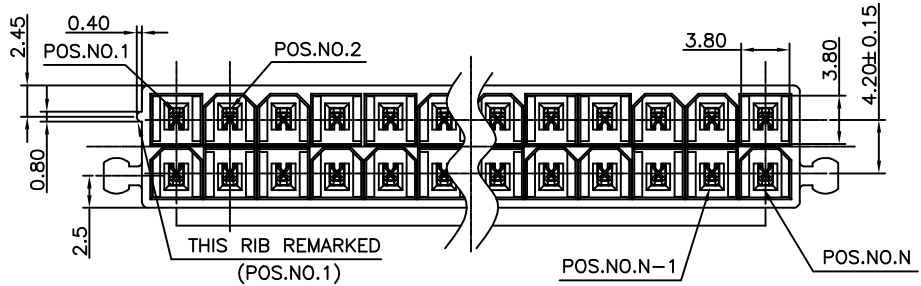


环保物料

SPECIFICATIONS :
 Voltage Rating: 600V AC / DC
 Current Rating: SEE NOTES
 Withstanding Voltage: 1500V AC/minute
 Temperature Range: -40°C~+105°C
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 After environmental testing: 40mΩ Max.

Material:
 Wafer: SEE NOTES.
 Color:SEE NOTES
 Conductor: SEE NOTES.
 Solder Resistance:265±5°C
 Insertion Force:1.0Kg/f MAX/PIN
 Withdrwl Force:0.2Kg/f MIN/PIN

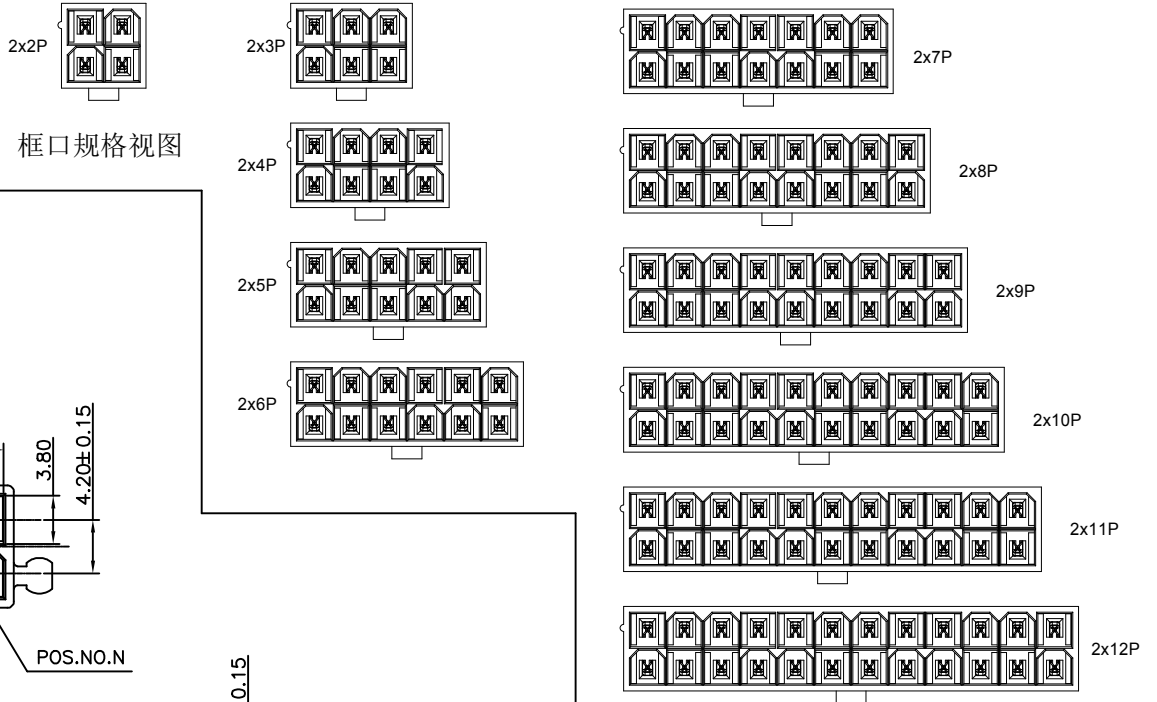



PIN NO.	Dimensions				
	A	B	C	D	E
2x2P	4.20	9.60	3.40	10.4	10.4
2x3P	8.40	13.80	3.40	10.4	10.4
2x4P	12.60	18.00	3.40	10.4	10.4
2x5P	16.80	22.20	3.40	10.4	10.4
2x6P	21.00	26.40	3.40	10.4	10.4
2x7P	25.20	30.60	3.40	26.0	10.0
2x8P	29.40	34.80	3.40	26.0	10.0
2x9P	33.60	39.00	3.40	26.0	10.0
2x10P	37.80	43.20	3.40	26.0	10.0
2x10P	37.80	43.20	37.80	26.0	10.0
2x11P	42.00	47.40	3.40	26.0	10.0
2x12P	46.20	51.60	3.40	26.0	10.0
2x12P	46.20	51.60	46.20	26.0	10.0

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.01.14	LINEAR	ANGLES	1:1	Frey Yang	23.04.11	34202W05-2xNPx-xxxx	ENDE05				
A1	新增规格	22.03.30	0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	23.04.11	TITLE					
A2	新增规格	23.04.11	UNIT: MM	0.00±0.25	X° ±3°	DESIGNER	Dalan Dai	23.04.11	PH 4.20mm PITCH DIP TYPE 180° WAFER				
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN				REV	A2	SHEET	1/4

环保物料

规格视图:

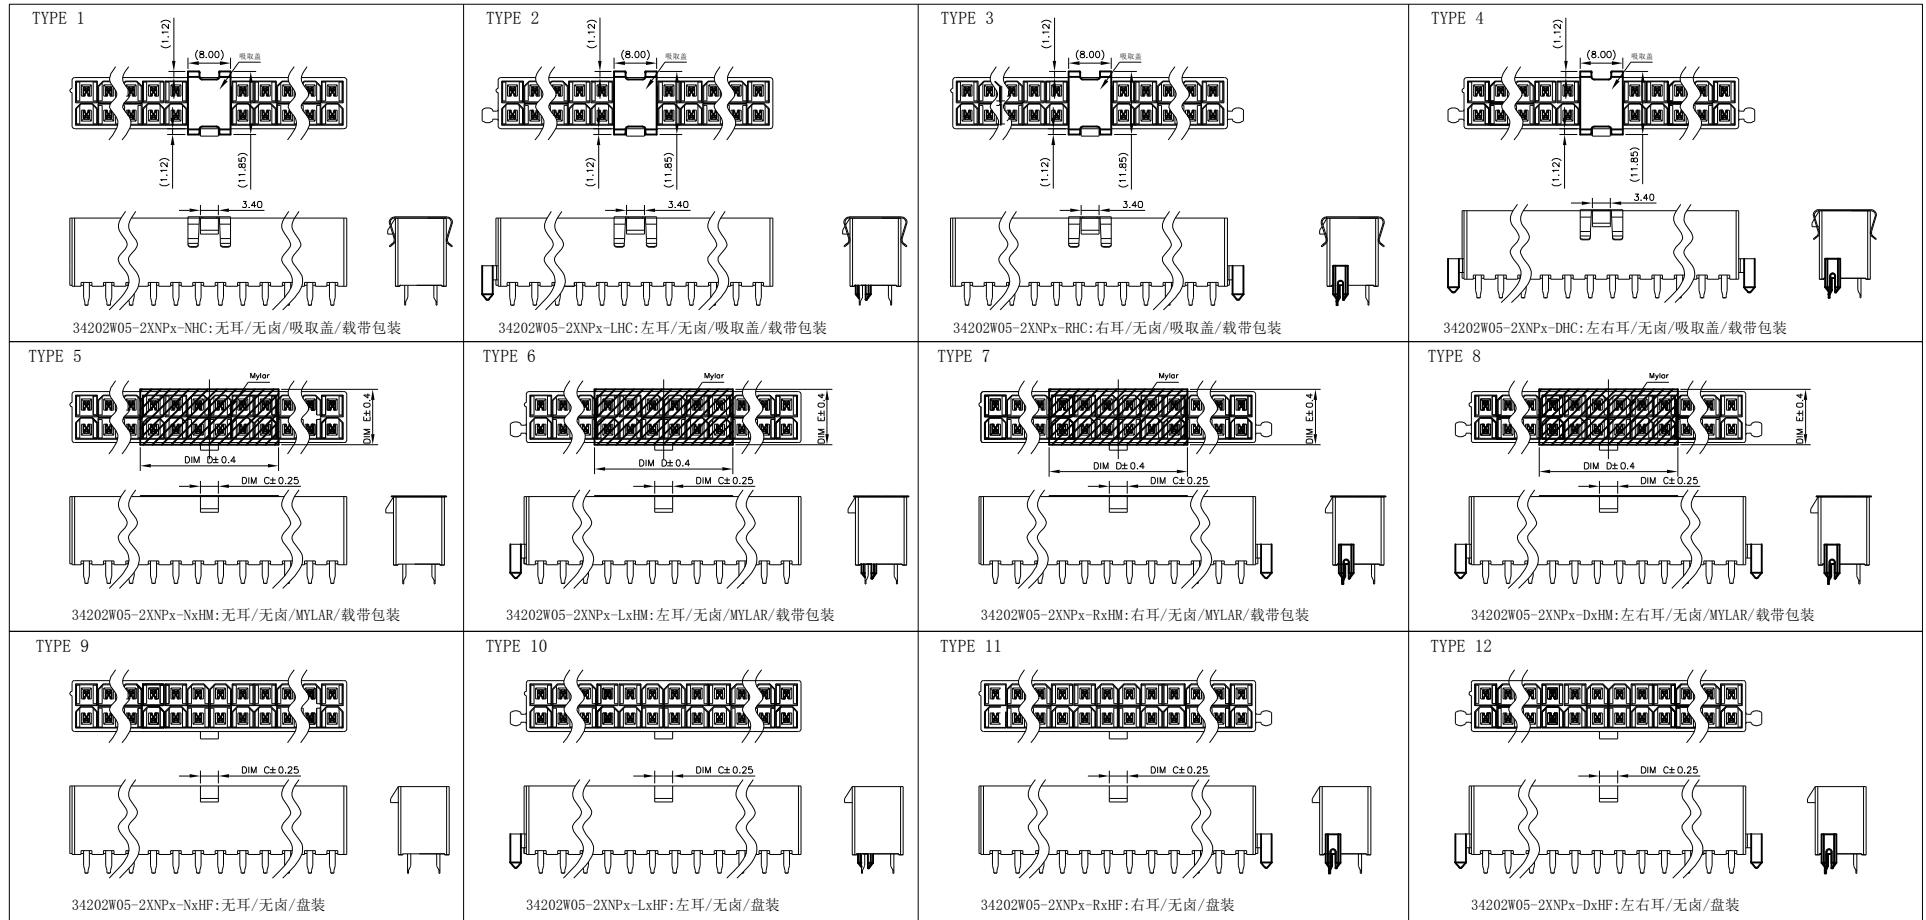

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.01.14		SIZE: A4	LINEAR	ANGLES	APPROVED	Frey Yang	23.04.11	34202W05-2xNPx-xxxx				ENDE05
A1	新增规格	22.03.30	0.0±0.30		X° REF±6°	DESIGNER	Daniel Dong	23.04.11	TITLE PH 4.20mm PITCH DIP TYPE 180° WAFER					
A2	新增规格	22.03.30	0.00±0.25		X° ±3°	DRAWN	Dalan Dai	23.04.11						
				0.000±0.10	X° X' ±2°						REV	A2	SHEET	2/4

1

2

3

4

5

6

7

8

环保物料

NOTES:

34202W05-2XNPx-xx xx

Series No.

W05:180度 无蘑菇头

2X:双排针

NP:单排Pin数

空: PA9T本色

A: PA9T黑色

W: LCP白色

B: LCP黑色

N: 无耳

L: 带左耳

R: 带右耳

D: 带左右双耳

HF: 无卤+盘装 (TYPE 9~12)

HC: 无卤+吸取盖+载带包装 (TYPE 1~4)

HM: 无卤+MYLAR+载带包装: (TYPE 5~8)

2X7P~2X12P唛拉规格为DIM E(10.0mm)X DIM D(26.0mm)

2X2P~2X6P唛拉规格DIM E(10.4mm)X DIM D(10.4mm)

空: 挂台DIM C尺寸=3.40mm/锡脚DIM F=3.5mm/端子C2680 (Current Rating:9A)
Tin-Plated 100u"Min. & 50u"Min Ni Plated Base

1: 挂台DIM C尺寸=42.60mm/锡脚DIM F=3.5mm/端子C2680 (Current Rating:9A)
Tin-Plated 100u"Min. & 50u"Min Ni Plated Base

P: 挂台DIM C尺寸=3.4mm/锡脚DIM F=3.5mm/端子C1814-H (Current Rating:11A)
Tin-Plated 100u"Min. & 50u"Min Ni Plated Base

2: 挂台DIM C尺寸=37.80mm/锡脚DIM F=3.5mm/端子C2680 (Current Rating:9A)
Tin-Plated 100u"Min. & 50u"Min Ni Plated Base

Δ G: 挂台DIM C尺寸=3.40mm/锡脚DIM F=3.5mm/端子C2680 (Current Rating:9A)
Gold-plated 10u" on contact area, Gold-flash on solder

Δ B: 挂台DIM C尺寸=3.40mm/锡脚DIM F=2.5mm/端子C2680 (Current Rating:9A)
Gold-plated 10u" on contact area, Gold-flash on solder

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC [®] TERMINAL&CONNECTORS			
A0	新图面发行	22.01.14		LINEAR	ANGLES	1:1								
A1	新增规格	22.03.30	UNIT: MM	0.0±0.30	X° REF±6°	APPROVED	Frey Yang	23.04.11	34202W05-2XNPx-xxxx	ENDE05	TITLE PH 4.20mm PITCH DIP TYPE 180° WAFER			
A2	新增规格	22.03.30		0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	23.04.11						
				SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Dalan Dai	23.04.11					
											REV	A2	SHEET	4/4