


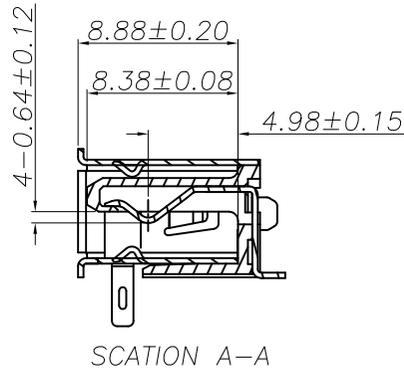
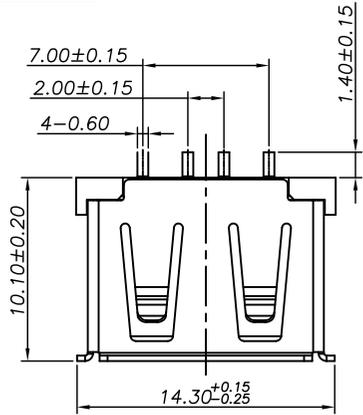



环保物料

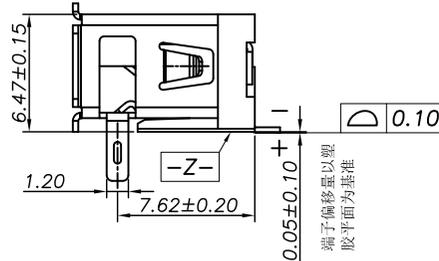

NOTES:



- 材质:
 塑胶:LCP 30%G.F UL94V-0 HF;
 端子:磷铜 C5191R-EH T=0.30±0.02mm
 外壳:SUS304 T=0.30mm
- 电镀规格:
 端子:接触区域:镀金Au 30u"Min. 镍Ni 60u" Min
 焊接区域:雾锡 (MATTE TIN) 100u" Min.
 外壳:镀镍Ni 40u"Min.
- 电气特性:
 额定电流: 1.5A, 250V AC.
 额定电压: 30V
 接触阻抗: 30mΩ Max.
 耐电压: AC 500V R. M. S.
 绝缘电阻: 1000MΩ MIN.
- 机械特性:
 插入力: 35 N MAX.
 拔出力: 10 N MIN, 耐久后6N MIN.
 耐久: 10000 CYCLE, 标准 EIA 364-09.

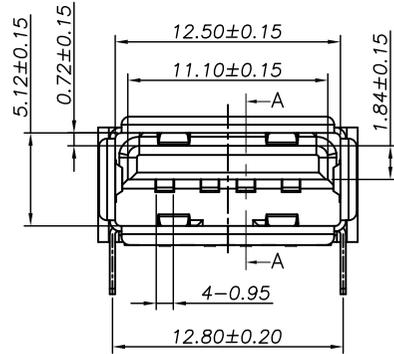

AUF1*W-H30-F

Contact Area:
 P: Au 2u",
 Pd/Ni 30u"
 K: Au 30u"
 F: Au 10u"
 E: Au 5u"
 C: Au 3u"
 A: Au G/F



0: General
 H: Halogen Free
 B: Black
 W: White

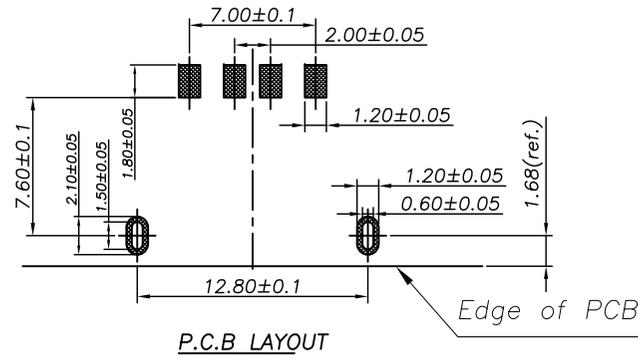




ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
1	外壳	SUS304	Ni:40u" MIN	SUFU1*-023
2	端子	磷铜C5191-EH	MATING: Au30u"MIN, UNDER: Ni60u"MIN, SOLDER TAIL: MATTE TIN: 100u"MIN	TUFOP*-013
3	塑胶	LCP	WHITE	HUF00W-H22

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	19.11.15	LINEAR	ANGLES	1:1	Frey Yang	22.09.04	AUFXKW-H30-F	ENDE05				
A1	更换图框发行	22.09.04	0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.09.04	TITLE					
			0.00±0.25	X° ±3°	DESIGNER	CHEN HONGXIN	22.09.04	USB-A/F SMT TYPE 成品					
			0.000±0.15	X° X'±2°	DRAWN								

环保物料

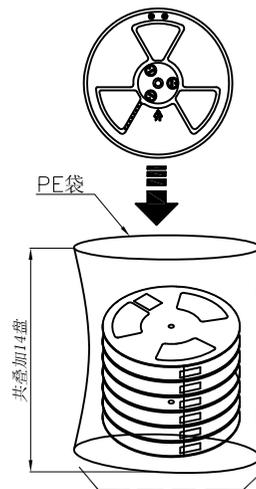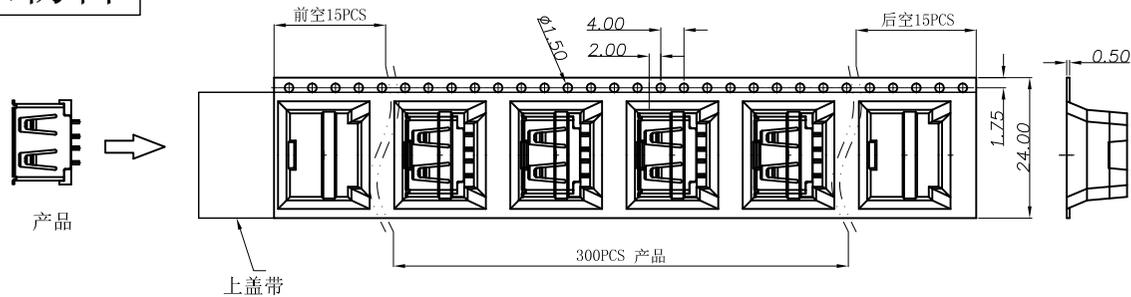

- 备注:
1. 剥皮速度: 300mm/MINUTE
 2. 剥离力: 50g~120g
 3. 剥皮角度: 165° ~180°
 4. 外箱尺寸:
L=340mm, W=340mm, H=440mm
 5. 包装要求: 300PCS/1卷盘, 14盘/外箱
 6. WEIGHT:

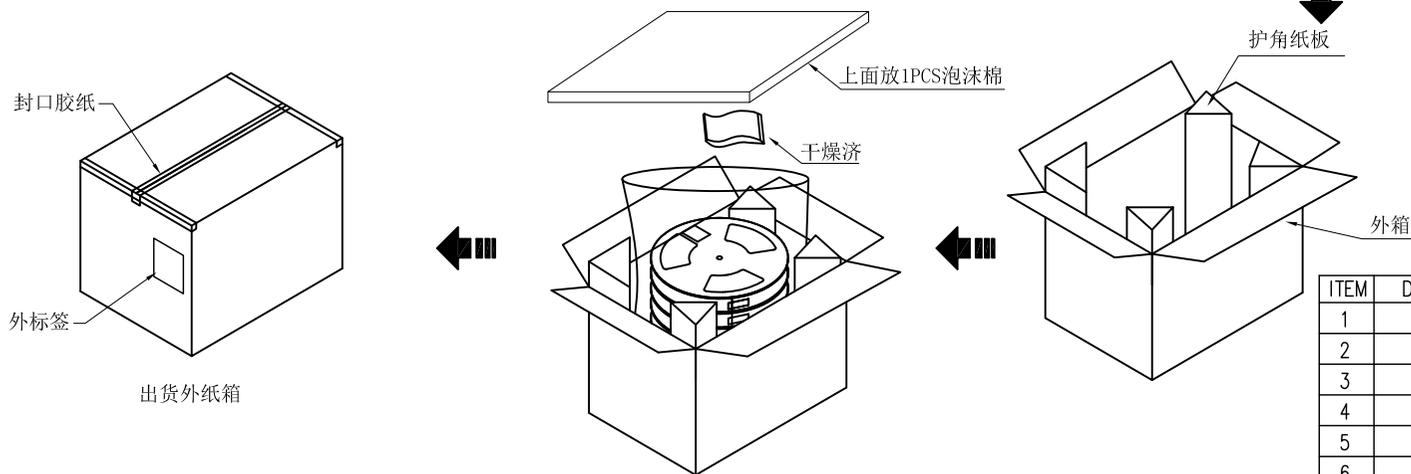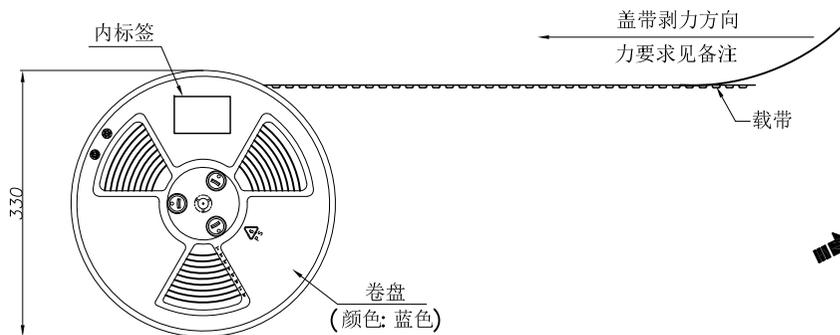

ITEM	DESC.	MATERIAL	QUANTITY	REMARKS
1	载带	PET	14卷	颜色: 透明
2	自粘盖带	PS	6.6米*15	颜色: 透明
3	外箱	K=K	1	印刷: 绿色文字
4	护角纸板	A=A	4	印刷: 绿色文字
5	PE袋		1	----
6	干燥剂		1	10g
7	泡沫棉		2	----

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
A0	新图面发行	19.11.15		LINEAR	ANGLES	1:1								APPROVED	Frey Yang
A1	更换图框发行	22.09.04	0.00±0.25	X° REF±6°	DESIGNER	Daniel Dong	22.09.04	TITLE			REV	A1	SHEET	1/1	
			SIZE: A4	0.00±0.15	X° X'±2°	DRAWN	CHEN HONGXIN	22.09.04	USB-A/F SMT TYPE 成品						