
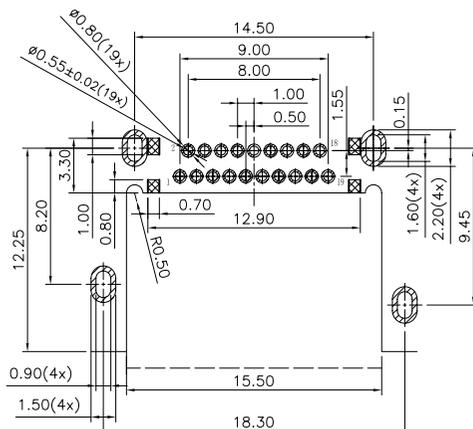


环保物料

检验规范

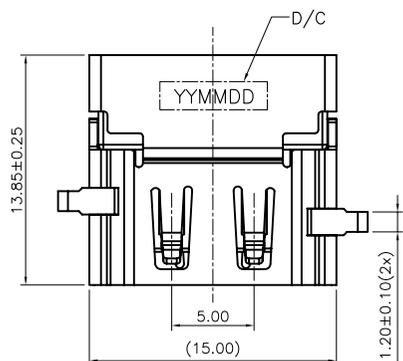






RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)
THICKNESS=1.20±0.05 (TOP VIEW)

NOTES:


- MATERIAL AND PLATING:
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au And Sn Plated.
Shell: SK7, Ni Plated.
- MECHANICAL CHARACTERISTIC
Mating Force: 44.1N(4.5Kg) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATE CODE: YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:

HA-F B150 D R -E0 XX
1 2 3 4 5 6 7

- HDMI A TYPE
- F:FEMALE M:MALE
- B150=中心高-1.50mm(沉板更多)
- D:DIP S:SMT
- R:90° V:180°
- TYPE码:E0:正常规格 01:带法兰
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

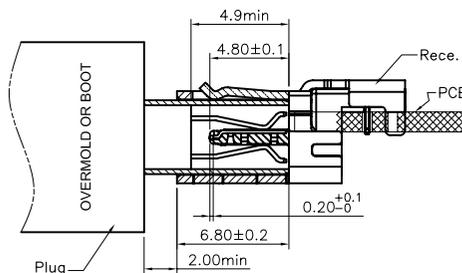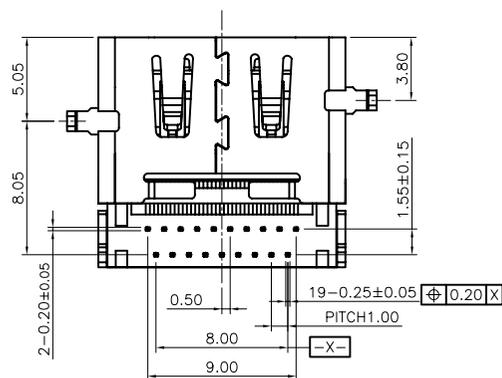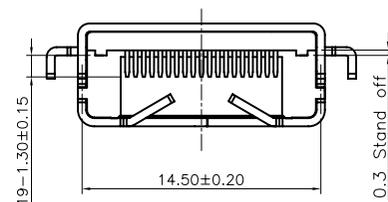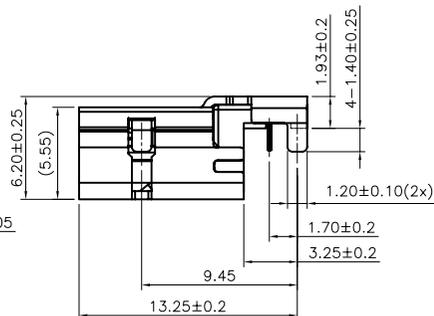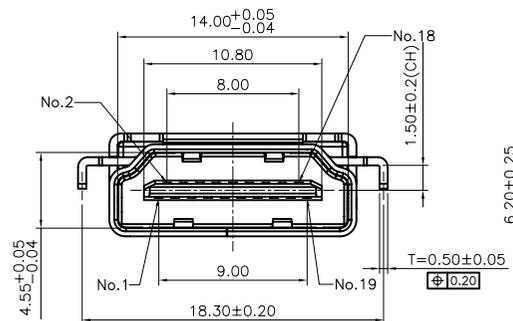

Mated Condition



| | | | | | | | | | | |
|---------|----------|------------------|------------------------|--------------|------------|-------------------------------------|---------------------|-------------------------|--|--|
| | | | 一般公差 GENERAL TOLERANCE | | 绘图 DR. 李兴泽 | 料号 PART NO. HA-FB150DR-E0XX | 文件编号 NUMBER ENDPT01 | TERMINAL&CONNECTORS | | |
| | | | X.X ±0.30 | X' ±2' | 校对 CHK. | 品名 TITLE HDMI A Type Receptacle DIP | | | | |
| | | | X.XX ±0.20 | X.X' ±1' | 审核 CHK. | Product CH=-1.50mm | | | | |
| | | | X.XXX ±0.10 | ▲ MAJOR DIM. | 核准 APPD. | | | | | |
| A0 | 20.11.24 | 新图面发行 | 李兴泽 | | | | | | | |
| 版次 REV. | 日期 DATE | 变更内容 DESCRIPTION | 审核 CHK. | 核准 APPD. | 单位 UNIT mm | | | | | |