
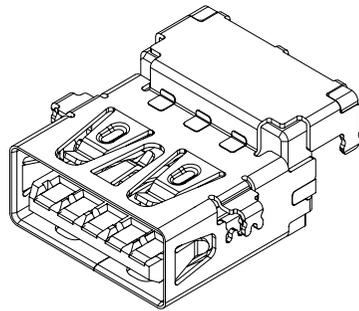
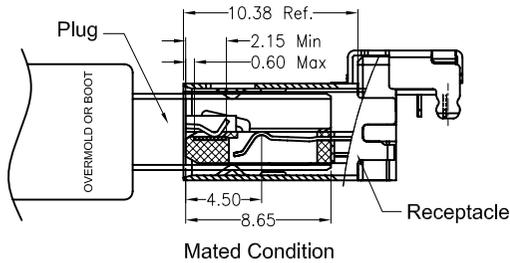
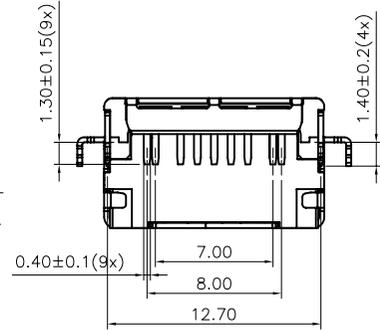
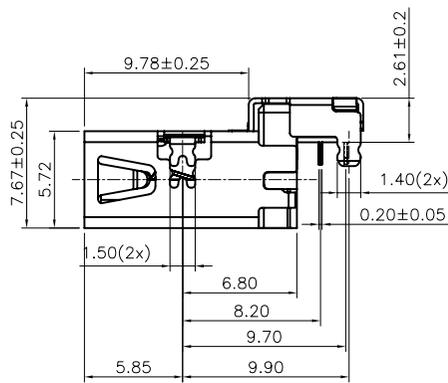
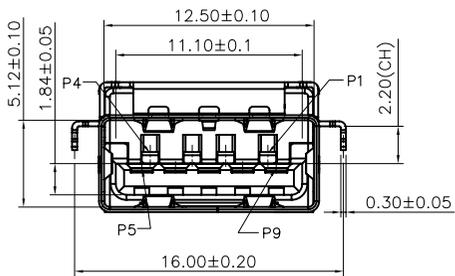
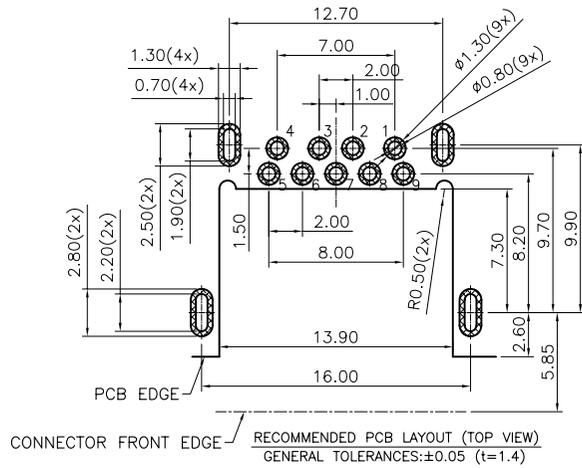


# 环保物料

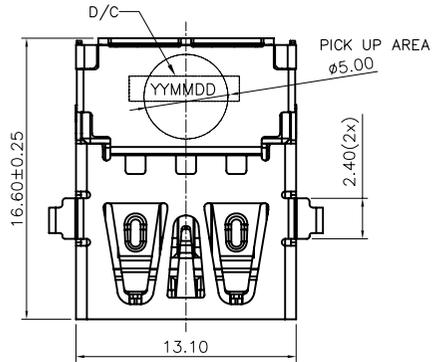

- NOTES:
- MATERIAL AND PLATING:  
Housing: PA9T+30%G.F,UL94V-0,Black  
Contact(4,5Pin): Copper Alloy,Au And Sn Plated.  
Shell: Stainless Steel,Ni Plated.
  - MECHANICAL CHARACTERISTIC  
Mating Force: 35N(3.57Kgf) Max.  
Unmating Force: 10N(1.02Kgf) Min.(Initial)  
8N(0.816Kgf) Min.(After)  
Durability: 5,000 Cycles.
  - ELECTRICAL CHARACTERISTIC  
Current Rating: 1.8A(Pin1,4),  
0.25A For Other Contacts.  
Voltage Rating: 30V AC Max.  
Contact Resistance: 30m Ohm Max.  
Insulation Resistance: 100M Ohm Min.  
Dielectric Withstanding Voltage: 100V AC.
  - TEMPERATURE  
Operating Temperature: -40°C~+85°C  
Storage Temperature: -60°C~+105°C
  - DATECODE INFORMATION:  
YYMMDD (Y:YEAR M:MONTH D:DATE)
  - ORDER INFORMATION:

HA-F B222 D R -E1 XX  
1 2 3 4 5 6 7

- HDMI A TYPE
- F:FEMALE M:MALE
- B222=中心高-2.22mm(沉板更多)
- D:DIP S:SMT
- R:90° V:180°
- TYPE码:E1:正常规格 01:带法兰
- Contact Area plating on contacts  
01: G/F 03: Au 3u"  
05: Au 5u" 10: Au 10u"  
15: Au 15u" 30: Au 30u"

Contact Number	Signal Name
PIN1	VBUS
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	StdA_SSRX-
PIN6	StdA_SSRX+
PIN7	GND_DRAIN
PIN8	StdA_SSTX-
PIN9	StdA_SSTX+
Shell	Shield

8					
A0	21.05.26	新图面发行	董东平	杨章雄	
版次REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ±0.30	X* ±2*	校对 CHK.	董东平
X.XX ±0.20	X.X* ±1*	审核 CHK.	董东平
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	杨章雄
单位 UNIT	mm		

料号 PART NO.	HA-FB222DR-E1XX	文件编号 NUMBER	ENDPT01
品名 TITLE	USB3.1 GEN2 A/F Reverse type, RIGHT ANGLE DIP C/H=-2.20mm		


 TERMINAL&CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0

# 环保物料


## PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON  
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED  
IN THE CHART.



PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
HA-FB222DR-E1XX	3000 (PCS)	300 (PCS)	10

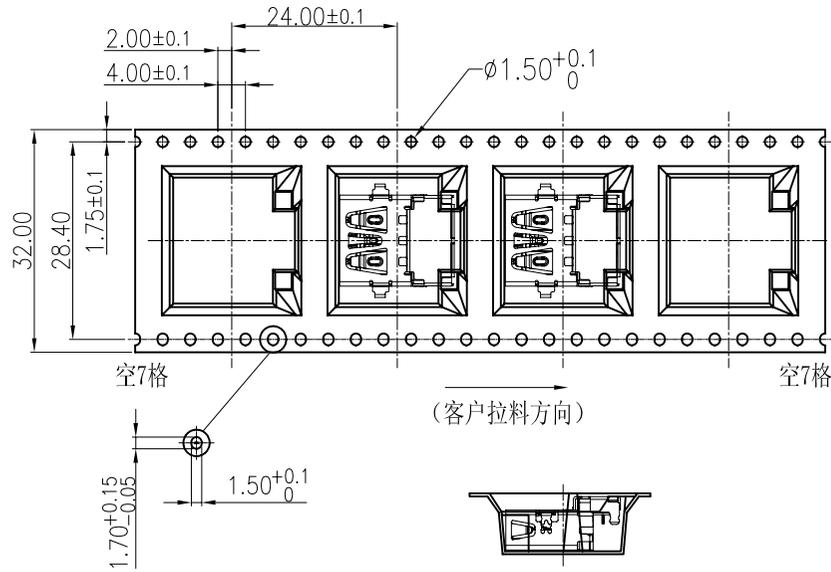

1. QUANTITY: 300 PCS
2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

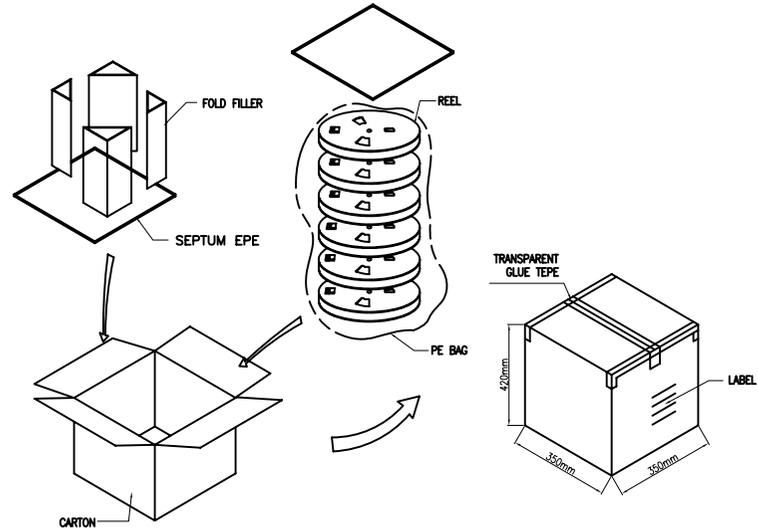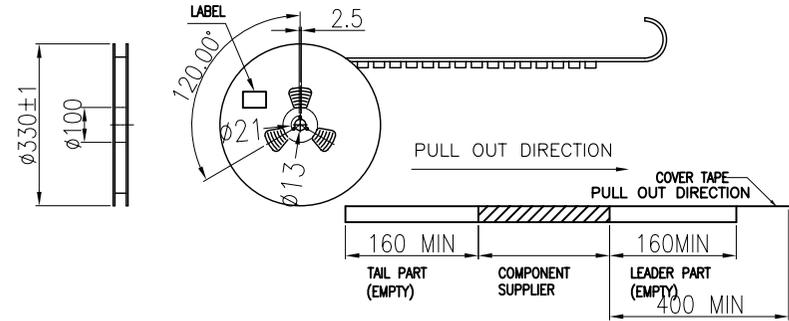

一般公差 GENERAL TOLERANCE					绘图 DR.	料号 PART NO.	文件编号 NUMBER	JGTC® TERMINAL&CONNECTORS		
X.X	±0.30	X'	±2'	校对 CHK.	李兴泽	HA-FB222DR-E1XX	ENDPT01	比例 SCALE 1/1 SHEET 1/1 版次 REV. A0		
X.XX	±0.20	X.X'	±1'	审核 CHK.	董东平	品名 TITLE	USB3.1 GEN2 AF R/A DIP RVS TYPE			
X.XXX	±0.10	▲ MAJOR DIM.		核准 APPD.	董东平	CH=-2.2 包装规范				
单位 UNIT	mm	核准 APPD.		杨章雄						

版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.05.26	新图面发行	董东平	杨章雄