

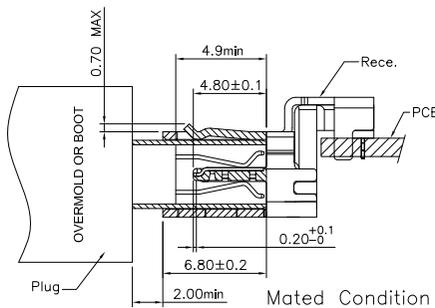
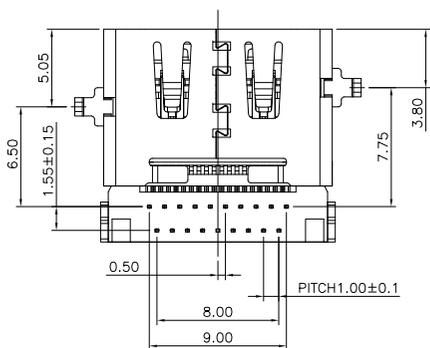
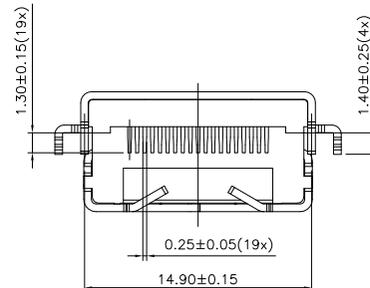
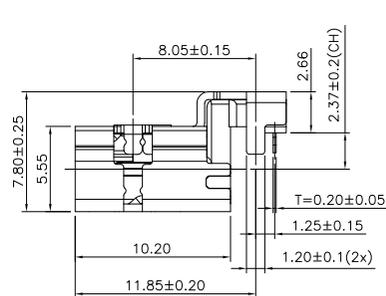
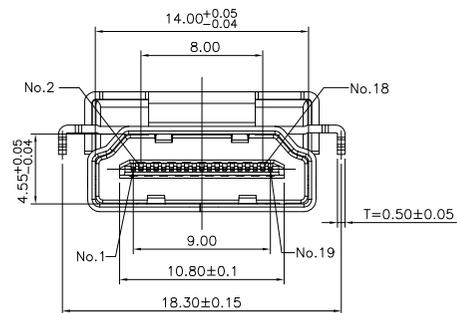
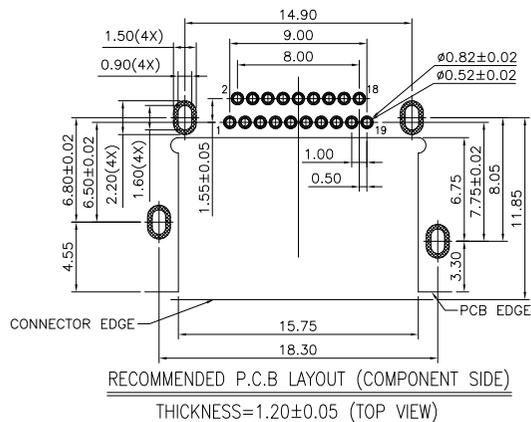


环保物料

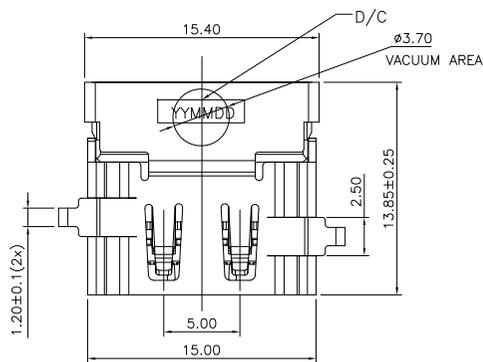

NOTES:

- MATERIAL AND PLATING:**
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au And Sn Plated.
Shell: SK7, Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 44.1N(4.5Kg) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C

HA-F B237 D R -E0 01
1 2 3 4 5 6 7

- HA:HDMI A TYPE
- F:FEMALE
- B237=中心高-2.37mm(沉板更多)
- D:DIP
- R:90°
- TYPE码:E0:正常规格
- Contact Area plating on contacts
- 01: G/F

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	新图面发行	22.02.22		LINEAR	ANGLES	1:1							
			0.00±0.25	X° ±3°	APPROVED	Frey Yang	22.02.22	HA-FB237DR-E001	ENDE05	TITLE HDMI AF R/A DIP RVS TYPE CH=-2.37mm(512-1)			
			0.00±0.10	X° X' ±2°	DESIGNER	Daniel Dong	22.02.22						
			SIZE: A4		DRAWN	CGY	22.02.22			REV	A0	SHEET	1/1

环保资料


PACKAGING INSTRUCTION:

1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON
ALL CARTONS CLOSURES MUST BE DONE WITH TAPE.
2. FILL PACKAGING REEL WITH THE QUANTITIES AS INDICATED
IN THE CHART.




PRODUCT P/N	PARTS PER SHIPPING CARTON	PARTS PER REEL (S.P.Q.)	TOTAL REELS PER PRIMARY CARTON
HDD-A19F-XXT-KN55	3000 (PCS)	300 (PCS)	10

1. QUANTITY: 300 PCS

2. COVER TAPE PEELING FORCE:



3. PART DIMENSIONS MEET EIA-481-D REQUIREMENT

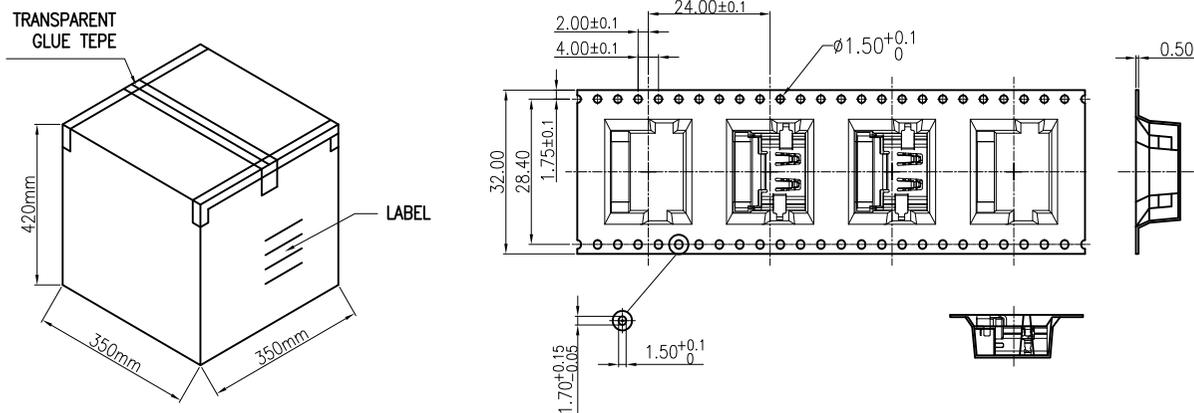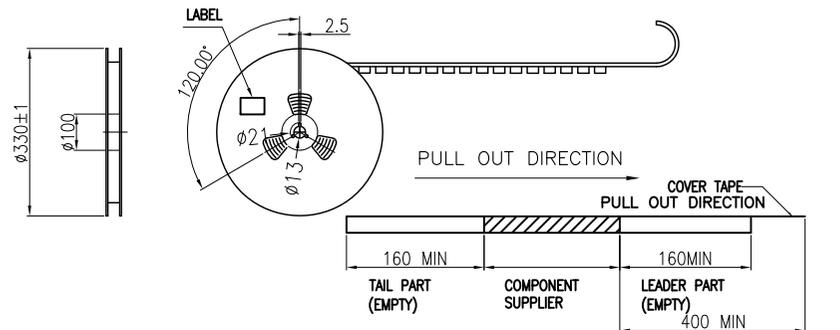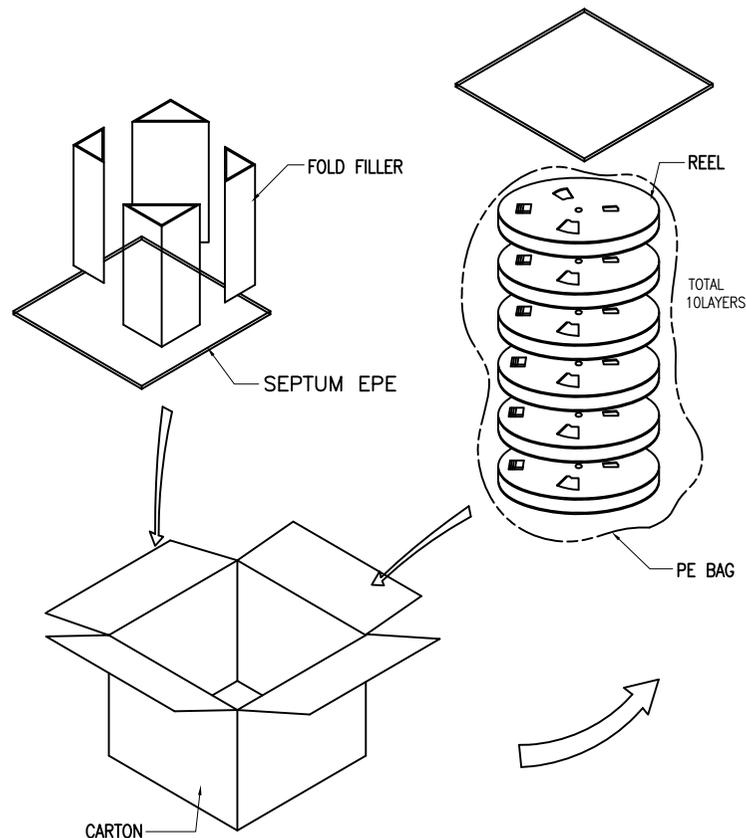

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL & CONNECTORS			
A0	新图面发行	22.02.22		LINEAR	ANGLES	1:1	Frey Yang	22.02.22	HA-FB237DR-E001	ENDE05				
			0.00±0.25	X° ±3°	APPROVED	Daniel Dong	22.02.22	TITLE HDMI AF R/A DIP RVS TYPE CH=-2.37mm(512-1)		REV	A0	SHEET	1/1	
			0.00±0.10	X° X' ±2°	DESIGNER	CGY	22.02.22							