
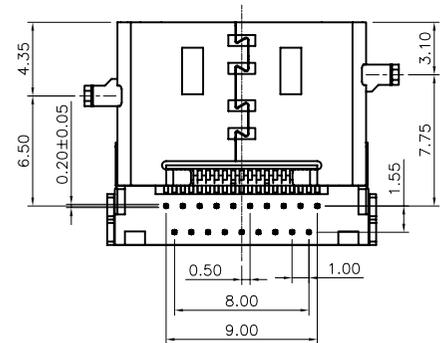
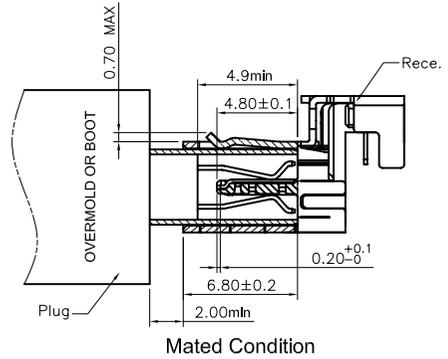
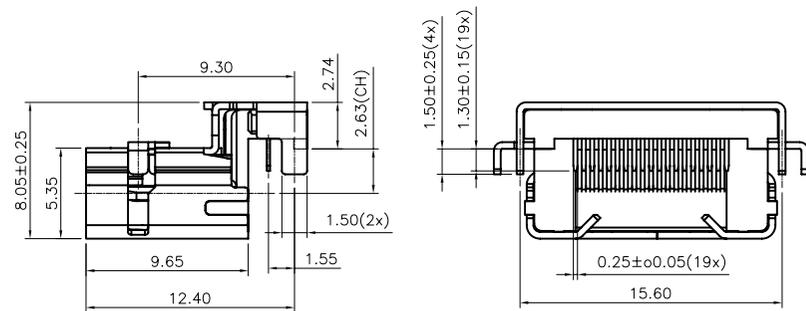
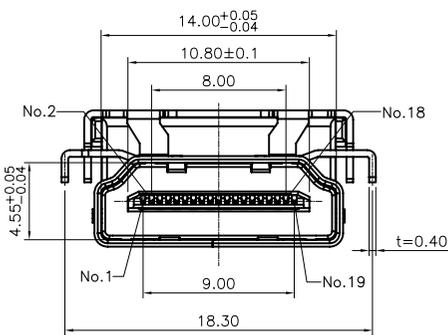
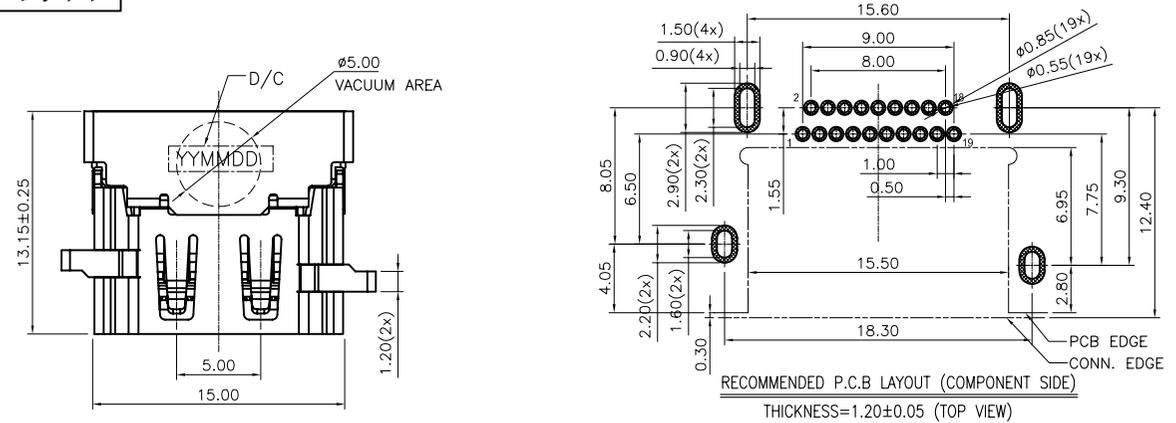


环保物料

- NOTES:
- MATERIAL AND PLATING:
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au Plated.
Shell: SK7, Ni Plated.
 - PLATING:
Contact: Au Plated on Contact Area,
Matt-Sn 100u" Plated on
Solder Tails.Ni 50u" min UnderPlated.
Shell: Ni 50u"min Plated All Over.
 - MECHANICAL CHARACTERISTIC
Mating Force: 44.1N(4.5Kgf) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
 - ELECTRICAL CHARACTERISTIC
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
 - TEMPERATURE
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
 - DATECODE INFORMATION:
YYMMDD (Y:YEAR M:MONTH D:DATE)
 - ORDER INFORMATION:
HA-F B263 D R -12 XX
1 2 3 4 5 6 7
- HDMI A TYPE
 - F: FEMALE M: MALE
 - B263=中心高-2.63mm
 - D: DIP S: SMT
 - R: 90° V: 180°
 - TYPE码: 12: 正常规格
 - Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

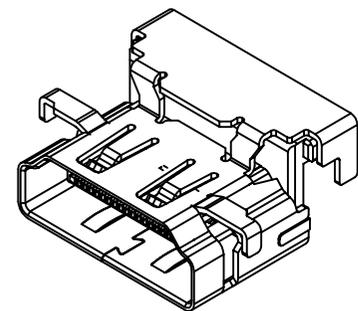

一般公差 GENERAL TOLERANCE						绘图 DR.	李兴泽	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS
X.X	±0.30	X'	±2'	校对 CHK.	董东平	HA-FB263DR-12XX	ENDPT01			
X.XX	±0.20	X.X'	±1'	审核 CHK.	董东平	品名 TITLE	HDMI A/F R/A DIP RVS TYPE	比例 SCALE	SHEET	版次 REV.
X.XXX	±0.10	▲ MAJOR DIM.		核准 APPD.	杨章雄	CH=-2.63mm	1/1	1/1	A0	
单位 UNIT	mm									

A0	21.05.26	新图面发行	董东平	杨章雄
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.

