
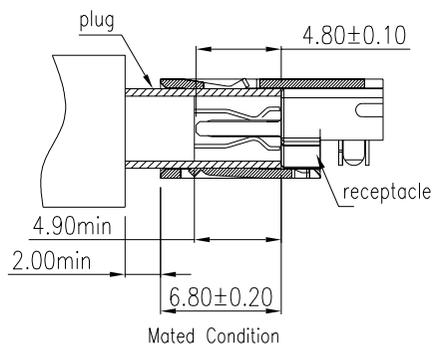
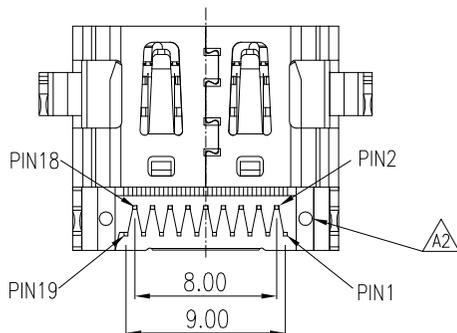
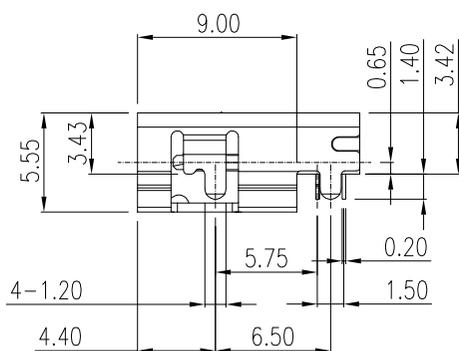
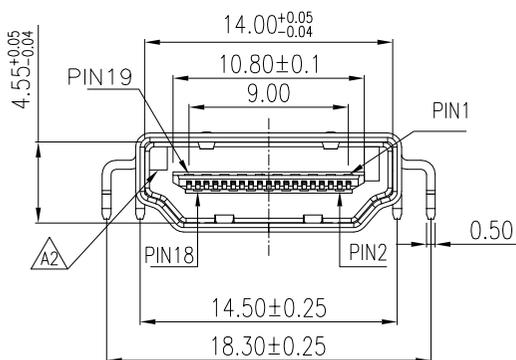
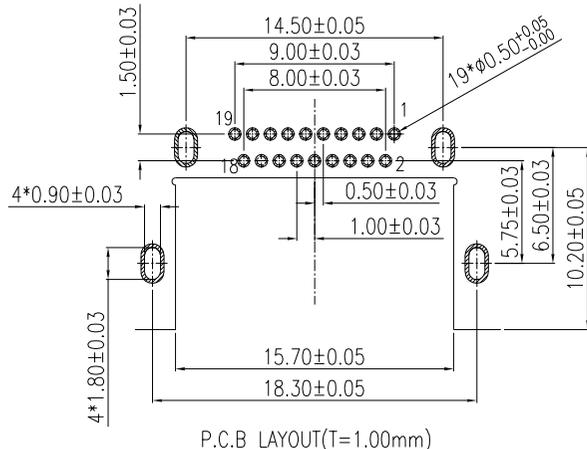


环保物料

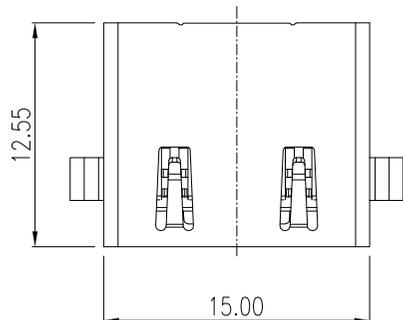

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 0.5 AMP
 - VOLTAGE RATING: 40 V
 - CONTACT RESISTANCE: 30MILLIOHMS MAX
 - INSULATION RESISTANCE: 100M MIN.@500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.5KGF MAX.
 - WITHDRAWING FORCE : 1KGF ~ 4KGF.
- LIFE TEST: 10000 CYCLES
- OPERATING TEMPERATURE: -25°C TO +85°C
- PART NO. DESCRIPTION:

MATERIAL AND PLATING:

- Housing: LCP Black.
- Contact: C2680H, GOLD FLASH CONNECET AREA TIN PLATING ON SOLD AREA
- Shell: SPCC 50u" NICKEL PLATEED


HA-F C065 D R -E1 01
1 2 3 4 5 6 7

- HA:HDMI A TYPE
 - F:FEMALE
 - C065=中心高0.65mm
 - D:DIP
 - R:90°
 - TYPE码:E1
 - Contact Area plating on contacts
- 01: G/F

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
A0	新图面发行	22.11.03		LINEAR	1:1	APPROVED		HA-FC065DR-E101	ENDE05	
A1	换图框发行	22.12.22		ANGLES						
A2	按实物更新图面	23.02.06	UNIT: MM	0.00±0.25	X° REF±6°	DESIGNER		TITLE		
			SIZE: A4	0.00±0.15	X° X'±2°	DRAWN	Dalan Dai	23.02.06	HDMI正向沉板 两K脚两直脚 板上高3.43 端子间距1.5 端子半金雾锡1u" 黑色胶芯	REV A2 SHEET 1/1

环保物料

USE DIRECTION



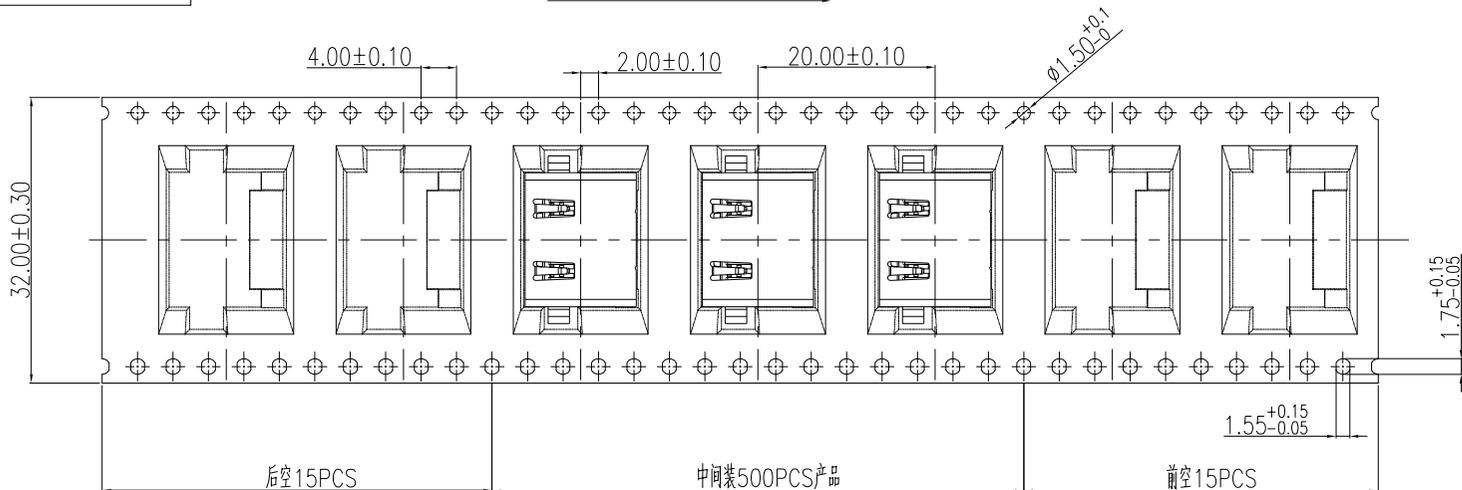


后空15PCS

中间装500PCS产品

前空15PCS

500	6	3000
PCS/TAPE	REELS/BOX	QUANTITY/BOX

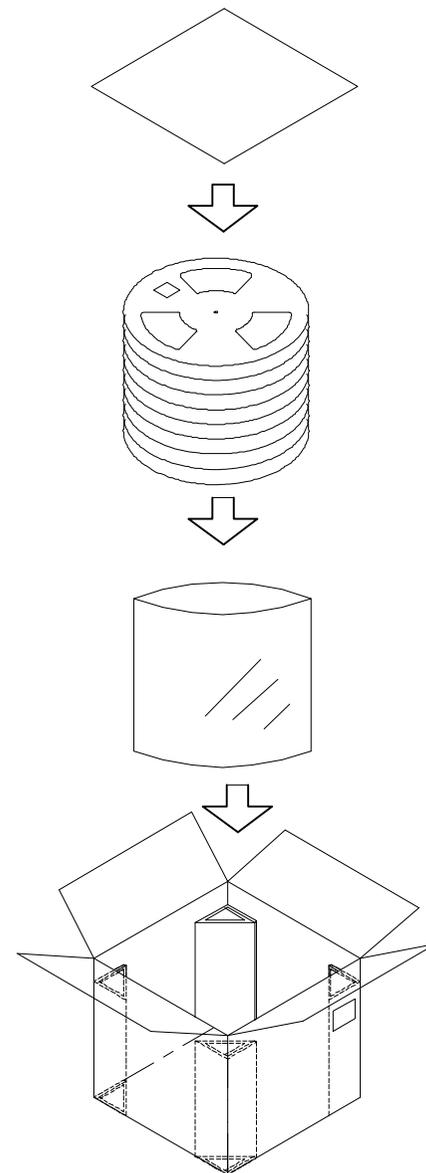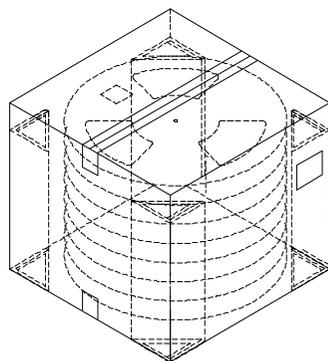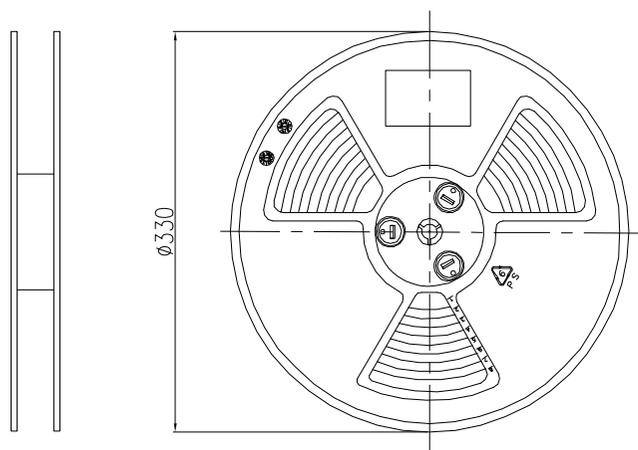

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS			
A0	新图面发行	22.11.03		LINEAR	ANGLES	1:1						APPROVED	HA-FC065DR-E101	ENDE05
A1	换图框发行	22.12.22	0.00±0.25	X° REF±6°		DESIGNER			TITLE					
			0.00±0.15	X° X'±2°		DRAWN	Dalan Dai	23.02.06	HDMI正向沉板 两K脚两直脚 板上高3.43 端子间距1.5 端子半金雾锡1u" 黑色胶芯					
			SIZE: A4								REV	A1	SHEET	1/1

1

2

3

4

5

6

7

8