

环保物料

NOTES:


- MATERIAL AND PLATING:**
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Brass, Au And Sn Plated.
Shell: SK7, Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 44.1N(4.5Kg) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATE CODE:** YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:**

HA-F C150 D R -E0 XX


1 2 3 4 5 6 7

- HA:HDMI A TYPE
- F:FEMALE
- C150=中心高1.5mm
- D:DIP
- R:90°
- TYPE码:E0:正常规格
- Contact Area plating on contacts
- 01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"


A

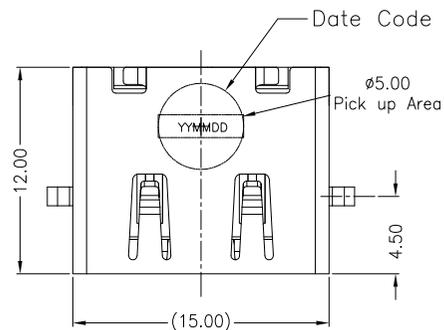


B

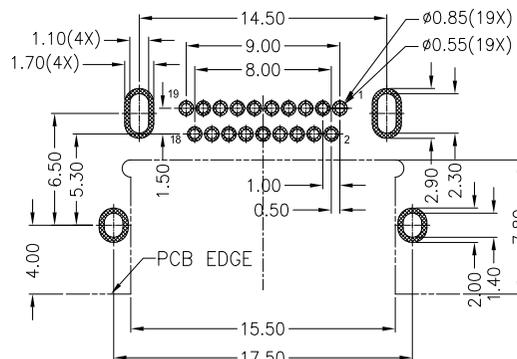


C

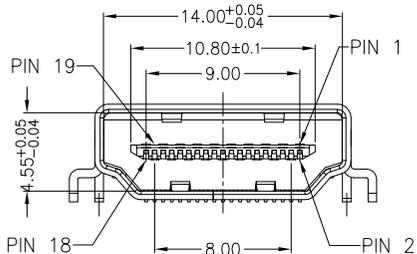


D

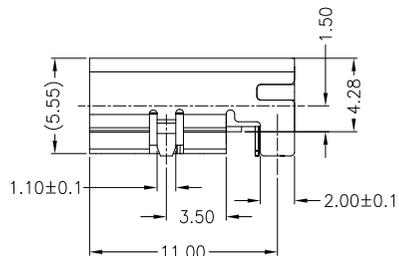



E

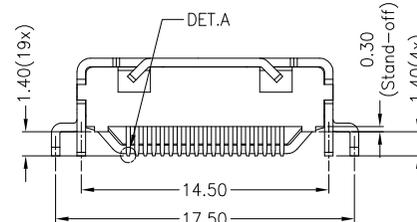

F

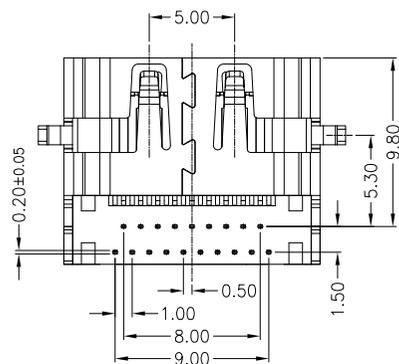

G



H

| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE | NAME | DATE | PART NO. | DWG NO. | TERMINAL&CONNECTORS | |
|------|------------------------------------|-----------|-------------|--------------------|------------|-------------|-----------|-----------------|----------|---------|-------------------------|---|
| AO | The new version file were released | 2022.3.23 | | LINEAR | ANGLES | 1:1 | Frey Yang | 2022.3.23 | | | | |
| | | | 0.0 ± 0.25 | X° REF ± 6° | APPROVED | Daniel Dong | 2022.3.23 | HA-FC150DR-E0xx | ENDE05 | TITLE | | |
| | | | 0.00 ± 0.15 | X° ± 3° | DESIGNER | Li Xing Ze | 2022.3.23 | | | | | HDMI A Type Receptacle DIP Product CH=1.50mm |
| | | | UNIT: MM | 0.00 ± 0.08 | X° X' ± 2° | DRAWN | | | | | | |

1

2

3

4

5

6

7

8