
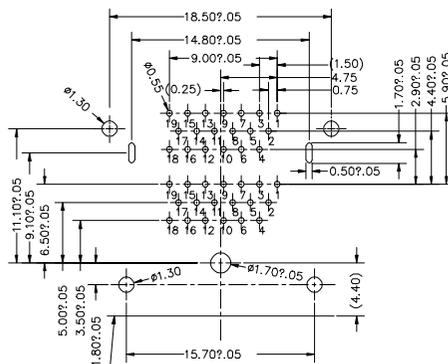


A

A



RECOMMENDED PCB LAYOUT
(THICKNESS=1.6±0.15mm)

SPECIFICATIONS

SPECIFICATIONS
 OPERATING CURRENT: 0.5A MAX.
 OPERATION TEMPERATURE: -25°C TO +85°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500Volts AC BETWEEN ADJACENT TERMINAL(UNMATE)
 300Volts AC BETWEEN ADJACENT TERMINAL(MATE)
 INSULATION RESISTANCE:
 100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)



BRACKET MATERIAL IS PA10T PLASTICS
 UPPER SHELL TAIL IS THROUGH HOLE SPRING LATCH
 BOTTOM HDMI WITH FLANGE AND SPRING LATCH
 SHELL TAIL IS THROUGH HOLE TYPE,W/O BACK LEG
 THE FRONT LEG LENGTH IS 1.9mm,THE PIN LENGTH IS 2.6mm

B

B

C

C

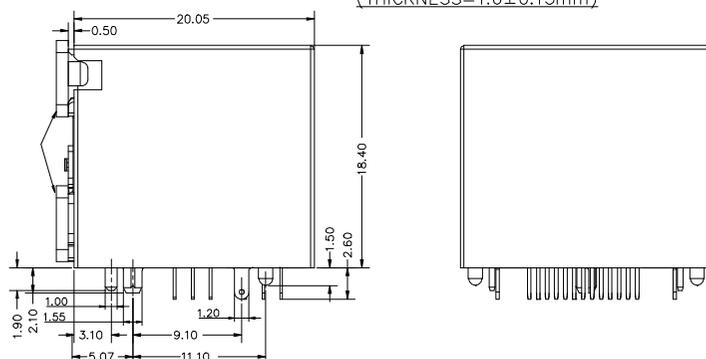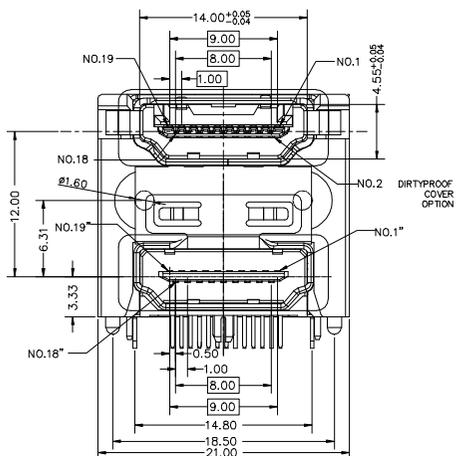

D

D

E

E

HA-F C153 D R -C1 01
 1 2 3 4 5 6 7


- 1.HA:HDMI A TYPE HD:HDMI D TYPE
- 2.F:FEMALE M:MALE
- 3.C100= 中心高15.33mm
- 4.D:DIP
- 5.R:90°
- 6.TYPE码:C1: 带弹片/ LCP
- 7.Contact Area plating on contacts
01: G/F

F

F

G

G

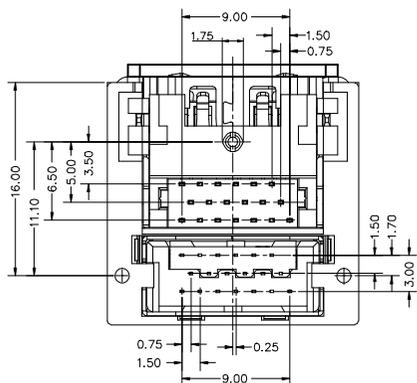

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	22.04.11		LINEAR	1:1	Frey Yang	24.03.13	HA-FC153DR-C101	ENDE05				
A1	换图框发行	24.03.13		ANGLES	APPROVED								
			UNIT: MM	0.00±0.25	X° REF±6°	DESIGNER	Daniel Dong	24.03.13	TITLE				
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	24.03.13	DUAL HDMI STACKED CONNECTOR THROUGH HOLE TYPE				
										REV	A0	SHEET	1/1