

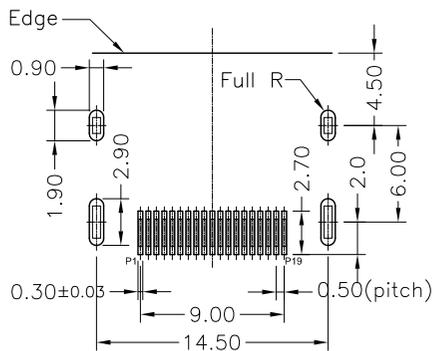





环保物料



NOTES:




- MATERIAL AND PLATING:**
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au And Sn Plated.
Shell: Steel, Au Plated Over All.
- MECHANICAL CHARACTERISTIC**
Mating Force: 44.1N(4.5Kgf) max.
Unmating Force: 9.8N~39.2(1~4Kgf).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCES:±0.05 (t=1.6)

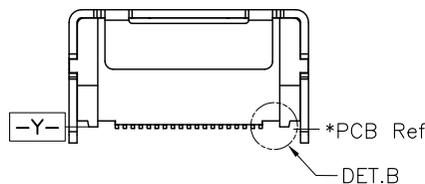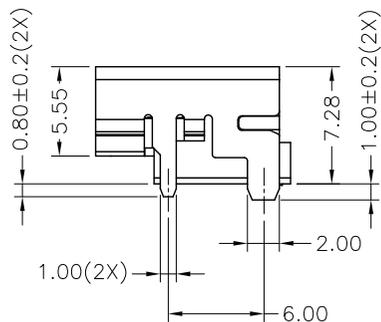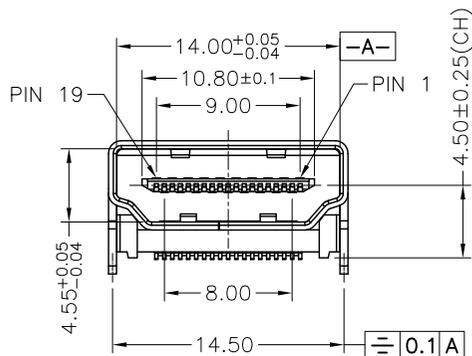

HA	F	C450	S	R	-E5	XX
1	2	3	4	5	6	7

- HA:HDMI A TYPE
- F:FEMALE
- C450=中心高4.50mm
- S:SMT
- R:90°
- TYPE码:E5:正常规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

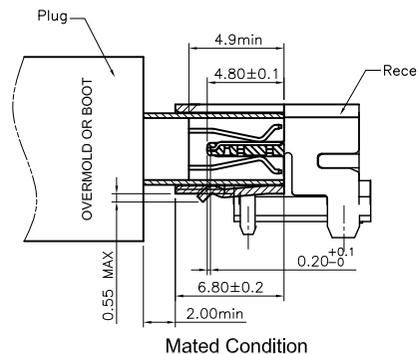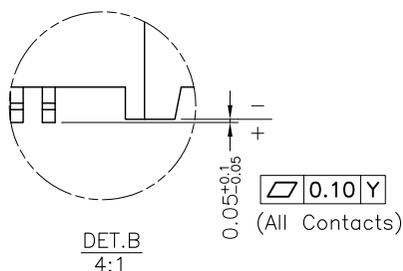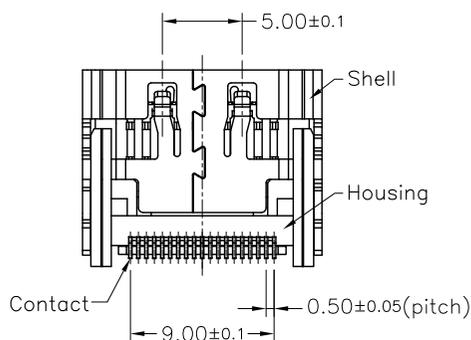

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
A0	The new version file were released	23.05.05		LINEAR					
			0.0±0.38	APPROVED	Daniel Dong	23.05.05	TITLE		
			0.00±0.25	DESIGNER	Li Xing Ze	23.05.05	HDMI 2.1 AF R/A SMT TYPE		
			0.000±0.15	DRAWN			CH=4.50MM		REV
									A0
									SHEET
									1/1