


环保物料

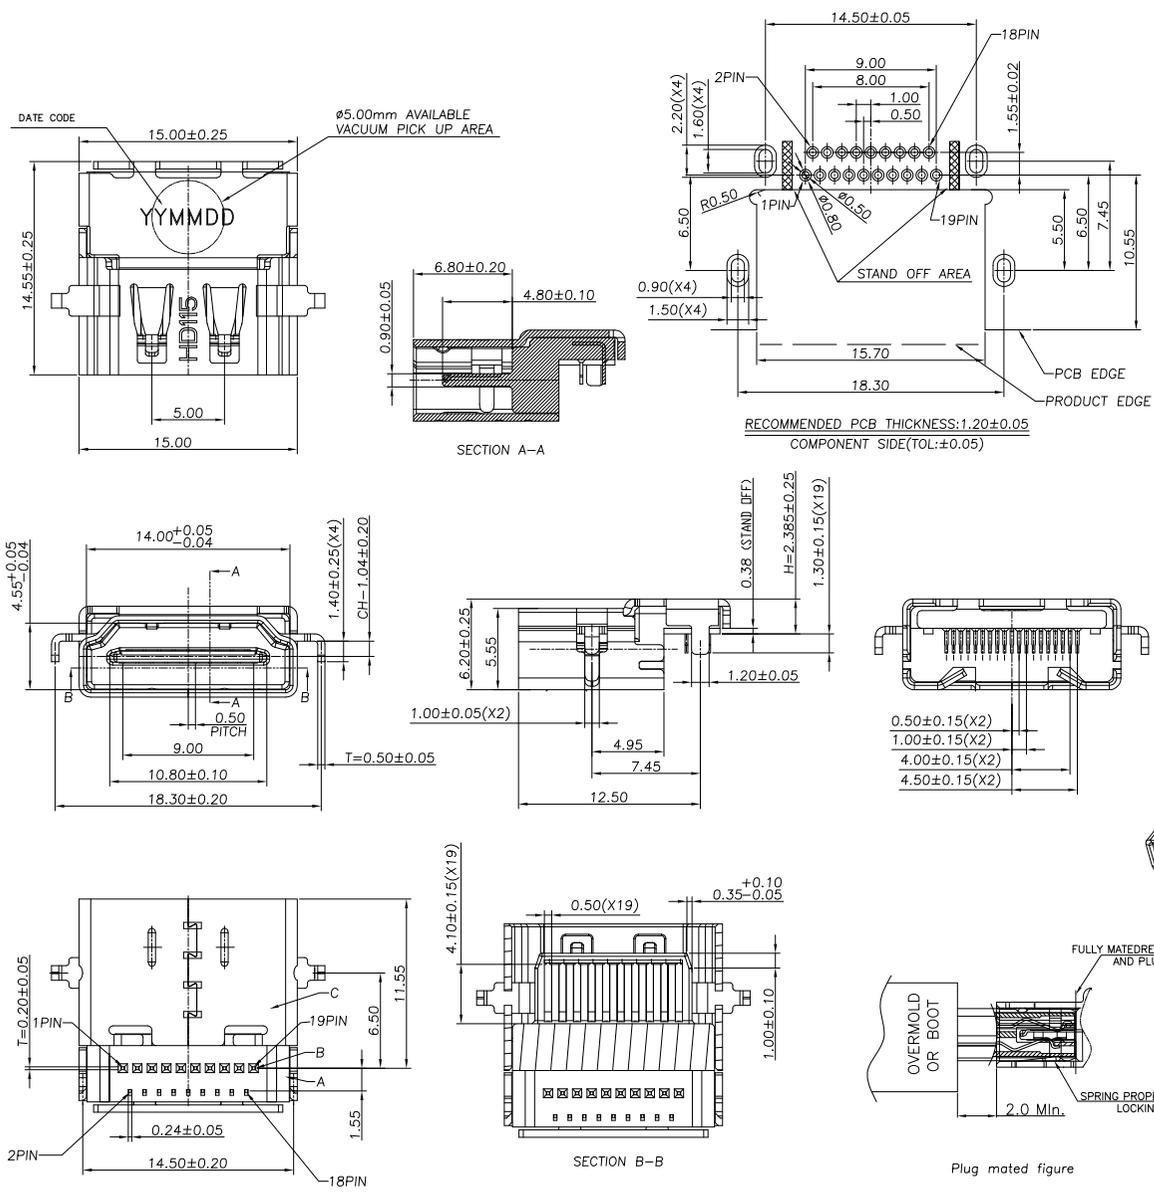

E		F	
PIN	SIGNAL ASSIGNMENT	PIN	SIGNAL ASSIGNMENT
1	TMDS DATA2+	8	TMDS DATA0 SHIELD
2	TMDS DATA2 SHIELD	9	TMDS DATA0-
3	TMDS DATA2-	10	TMDS CLOCK+
4	TMDS DATA1+	11	TMDS CLOCK + SHIELD
5	TMDS DATA1 SHIELD	12	TMDS CLOCK-
6	TMDS DATA1-	13	CEC
7	TMDS DATA0+	14	UFLIFY/HEAC+
15	SCL	16	SDA
17	DDC/CEC GROUND	18	+5V POWER
19	HOT PLUG DETECT		

- NOTES:
- ELECTRICAL CHARACTERISTIC:
 - LOW LEVEL CONTACT RESISTANCE: 30mΩ MAXIMUM.
 - DIELECTRIC WITHSTANDING VOLTAGE:
 - 500 VAC BETWEEN ADJACENT TERMINAL OR GROUND, No Breakdown (Unmated).
 - 300 VAC BETWEEN ADJACENT TERMINAL OR GROUND, No Breakdown (Mated).
 - INSULATION RESISTANCE: 100MΩ MINIMUM (Unmated). 10MΩ MINIMUM (Mated).
 - MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 3kgf MAXIMUM.
 - EXTRACTION FORCE:
 - INITIAL: 1.0kgf MINIMUM.
 - AFTER 10000 CYCLES: 1.0kgf MINIMUM.
 - PLATING SPECIFICATION:
 - CONTACTS: Ni 50u" MIN. UNDER PLATED, CONTACT AREA PLATED SEE PART NO. MATTE Sn 80-100u" . PLATED ON THE SOLDER TALL.
 - FRONT SHELL: BLACK Ni 50u" MIN. UNDER PLATED OVER ALL.

HA-F E104 D R -E0 XX
1 2 3 4 5 6 7

- HDMI A TYPE
- F: FEMALE
- E104 = 反向中心高-1.04
- D: DIP
- R: 90°
- TYPE码: E0: 正常规格
- Contact Area plating on contacts







01: G/F	03: Au 3u"
05: Au 5u"	10: Au 10u"
15: Au 15u"	30: Au 30u"

C	SHELL	1	SUS304
B	TERMINAL	19	C2680/SEE NOTES
A	HOUSING	1	LCP UL94V-0 BLACK
NO	PART NAME	QTY	MATERIAL PLATING & COLOR

一般公差 GENERAL TOLERANCE					绘图 DR.	王正顺	料号 PART NO.	文件编号 NUMBER
X.X	±0.30	X*	±5°	校对 CHK.	董东平	HA-FE104DR-E0XX	ENDPT01	
X.XX	±0.25	X.X*	±3°	审核 CHK.	董东平			
X.XXX	±0.10	▲ MAJOR DIM.		核准 APPD.	杨章雄	品名 TITLE	比例 SCALE	
A0	21.08.02	新图面发行	董东平	杨章雄		HDMI 2.1 AF RVS CH=-1.04 H2.385	1:1	
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.		L14.55 DIP	SHEET 1/1	
							版次 REV. AO	

JGTC®
TERMINAL & CONNECTORS

环保物料

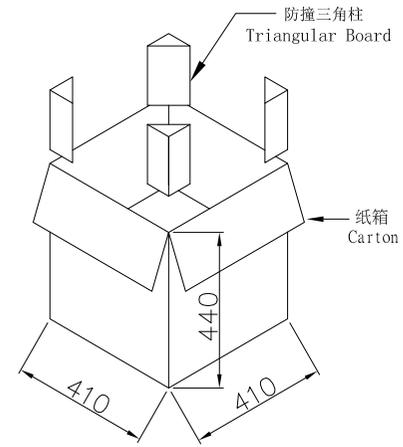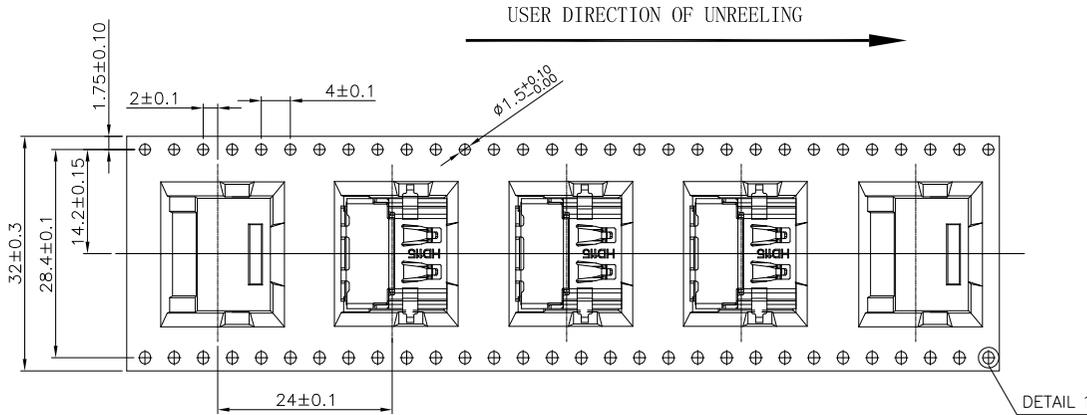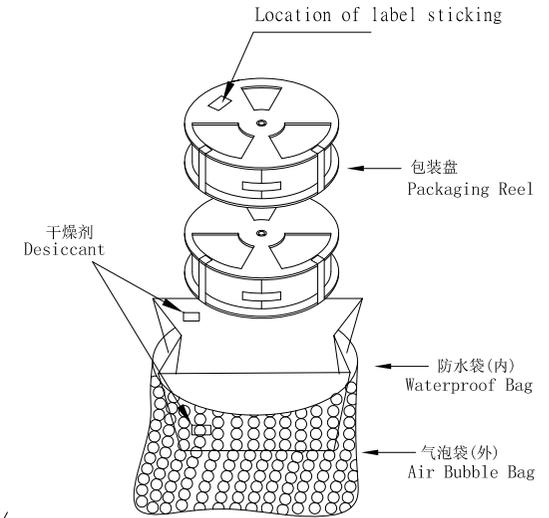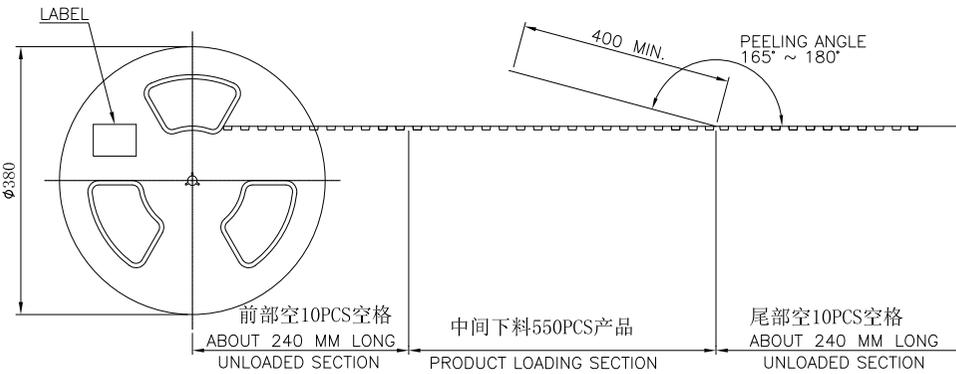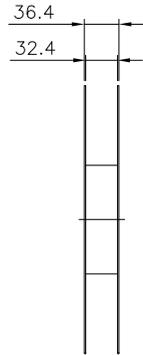

NOTE:

- MATERIAL:
 BOX: FIBRE BOARD, CORRUGATED, DOUBLE WALL (K=K).
 TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, TRANSPARENT COLOR (透明色).
 REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
 BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
- PEELING STRENGTH: 0.2~1.0N (20~100gf)
- PEELING SPEED: 300 mm/min.
- EACH BAG SHALL BE INCLUDED DESICCANT.

550	11	6050 PCS	-- KG	-- KG
PCS/ REEL	REELS/ CARTON	QUANTITY	GROSS WEIGHT	NET WEIGHT

					一般公差 GENERAL TOLERANCE		绘图 DR.	王正顺	料号 PART NO.		文件编号 NUMBER		 TERMINAL&CONNECTORS		
					X.X ±0.30	X' ±5°	校对 CHK.	董东平	HA-FE104DR-EXXX		ENDPT01				
					X.XX ±0.25	X.X' ±3°	审核 CHK.	董东平	品名 TITLE		HDMI 2.1 AF RVS CH=-1.04 H2.385		比例 SCALE	SHEET	版次 REV.
A0	21.08.02	新图面发行	董东平	杨章雄	X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	杨章雄	L14.55 DIP		1:1	1/1	A0		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT	mm									