

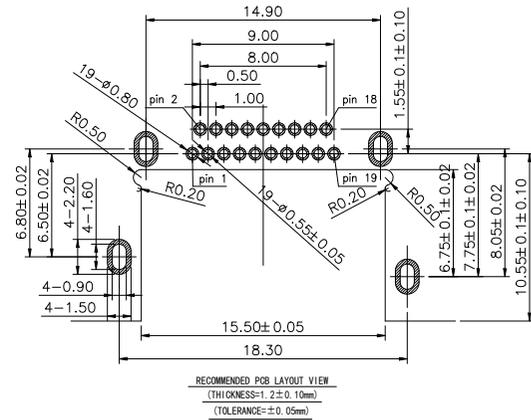
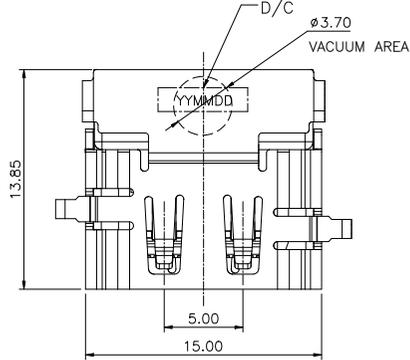
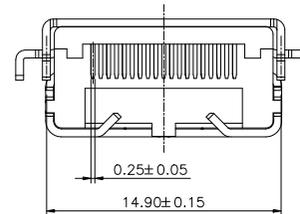


ROHS 2.0 HF

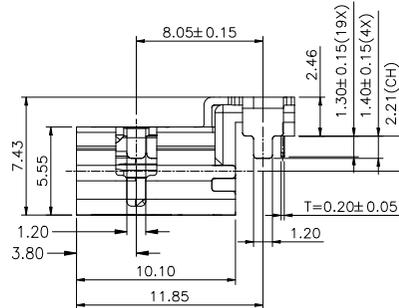




NOTES:

- MATERIAL AND PLATING:**
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au And Sn Plated.
Shell: SK7, Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 44.1N(4.5Kgf) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 10m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- DATE CODE:** YYMMDD (Y:YEAR M:MONTH D:DATE)
- ORDER INFORMATION:**

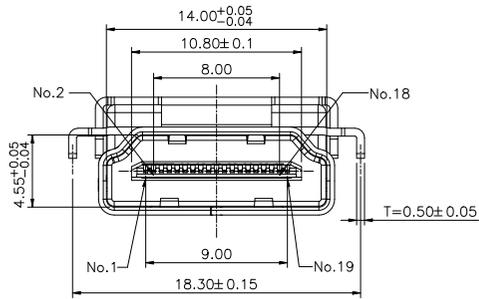

HA-F E221 D R -E0 xx
1 2 3 4 5 6 7

- HA:HDMI A TYPE HD:HDMI D TYPE
- F:FEMALE M:MALE
- E221=反向中心高-2.21
- D:DIP
- R:90°
- TYPE码:E0:正常规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

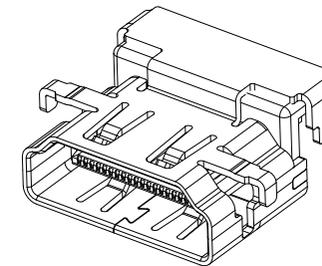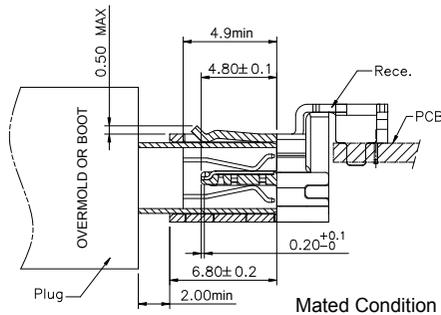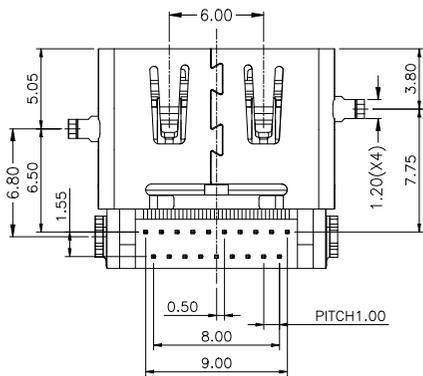

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	
A0	新图面发行	20.03.10		SIZE: A4	LINEAR	ANGLES	APPROVED	Frey Yang	24.04.10	HA-FE221DR-E0xx	
A1	换图框发行	24.04.10	0.0±0.30		X° REF±6°	DESIGNER	Daniel Dong	24.04.10	TITLE		
			0.00±0.25	X° ±3°	DRAWN	Micky Ma	24.04.10	HDMI AF R/A DIP RVS TYPE			
			0.000±0.10	X° X' ±2°				CH=2.21mm			