
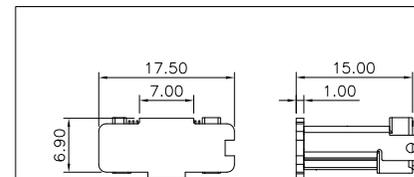

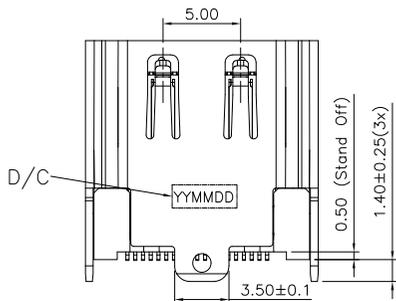
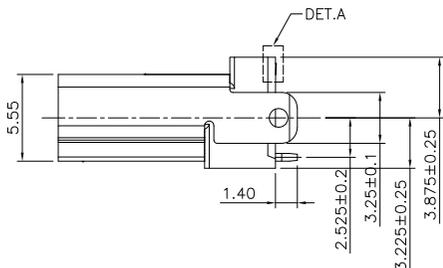
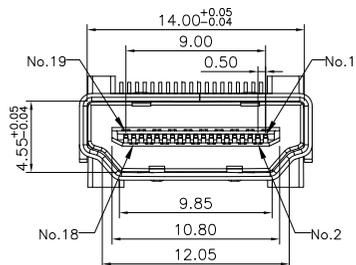
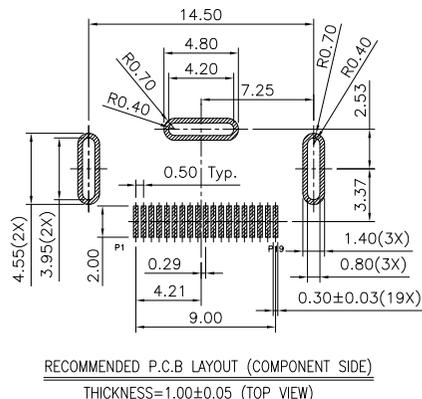



环保物料

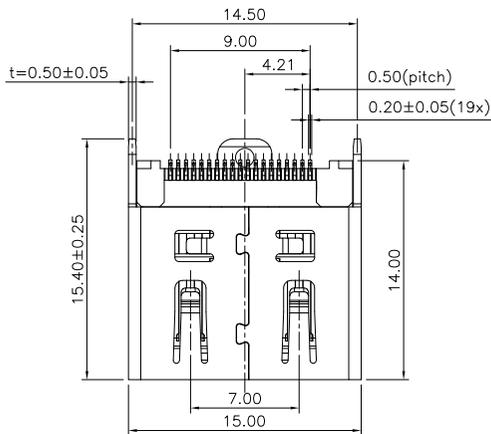

CONNECTOR WITH CAP
SCALE: 1:2

NOTES:

- MATERIAL AND PLATING:**
Housing: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au Plated.
Shell: Brass Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 44.1N(4.5Kgf) max.
Unmating Force: 9.8N~39.2(1~4Kg).
Durability: 10,000 Cycles.
- ELECTRICAL CHARACTERISTIC**
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 10m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Openrating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**

HA-F H140 S V -E0 XX
1 2 3 4 5 6 7

- HA:HDMI A TYPE
- F:FEMALE
- H140=直立式, 板上高度14.00mm
- S:SMT
- V:180°
- TYPE码:E0:正常规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

| REV. | REVISION RECORD | DATE | | GENERAL TOLERANCES | | SCALE | NAME | DATE | PART NO. | DWG NO. | TERMINAL&CONNECTORS | | | | |
|------|------------------------------------|-----------|----------|--------------------|-----------|----------|-------------|-----------|---|---------|-------------------------|----------|-----------|-----------|-----------------|
| AO | The new version file were released | 2021.4.21 | | LINEAR | ANGLES | 1:1 | | | | | | APPROVED | Frey Yang | 2021.4.21 | HA-FH140SV-E0XX |
| | | | UNIT: MM | 0.00±0.15 | X° ±3° | DESIGNER | Daniel Dong | 2021.4.21 | TITLE HDMI A TYPE FEMALE 19 PIN VERTICAL DIP H=14.0mm | | | REV | AO | SHEET | 1/1 |
| | | | SIZE: A4 | 0.000±0.10 | X° X' ±2° | DRAWN | Taylor Chen | 2021.4.21 | | | | | | | |