









环保物料

NOTES:

- MATERIAL AND PLATING:**
Housing/Cap: LCP+30%G.F,UL94V-0,Black
Contact: Copper Alloy, Au Plated.
Shell: SK7, Ni Plated.
- MECHANICAL CHARACTERISTIC**
Mating Force: 44.1N(4.5Kgf) max.
Unmating Force: 9.8N~39.2(1~4Kg)(Initial).
5N~39.2(0.51~4Kg)(After)
- ELECTRICAL CHARACTERISTIC**
Current Rating: 0.5A Max.
Voltage Rating: 40V AC Max.
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 100M Ohm Min(unmated)
10M Ohm Min(mated)
Dielectric Withstanding Voltage: 500V AC Min
- TEMPERATURE**
Operating Temperature: -40°C~+85°C
Storage Temperature: -60°C~+105°C
- ORDER INFORMATION:**

HA-F H151 S V -H0 XX
1 2 3 4 5 6 7

- HA:HDMI A TYPE
- F:FEMALE
- H151=直立式, 板上高度15.10mm
- S:SMT
- V:180°
- TYPE码:H0:正常规格
- Contact Area plating on contacts
01: G/F 03: Au 3u"
05: Au 5u" 10: Au 10u"
15: Au 15u" 30: Au 30u"

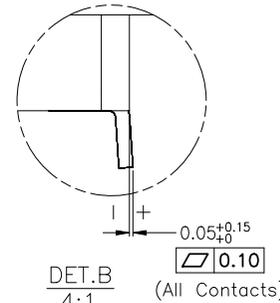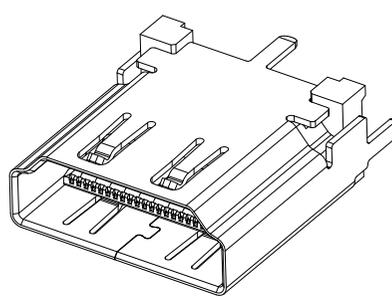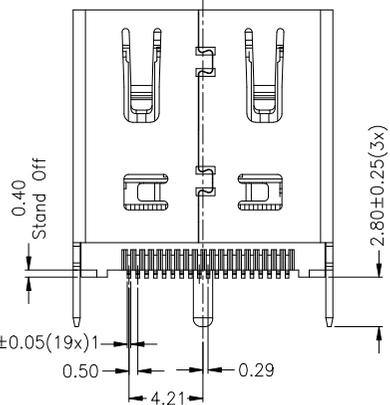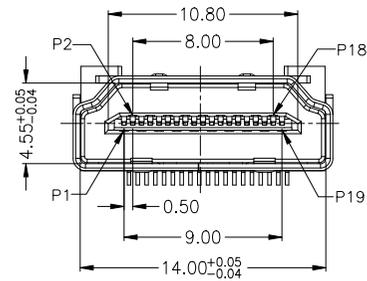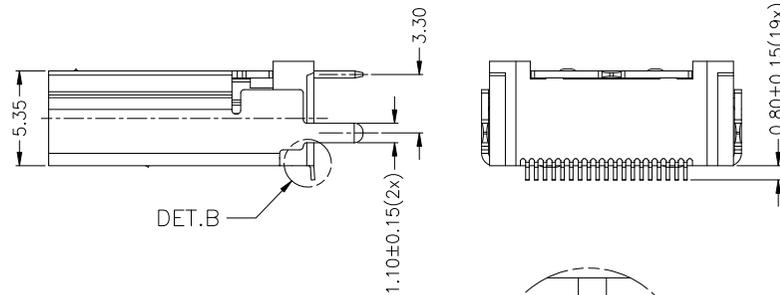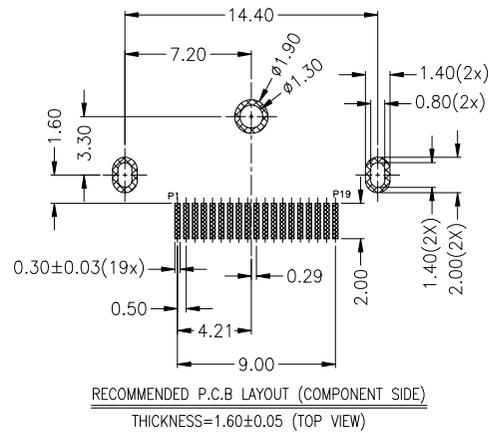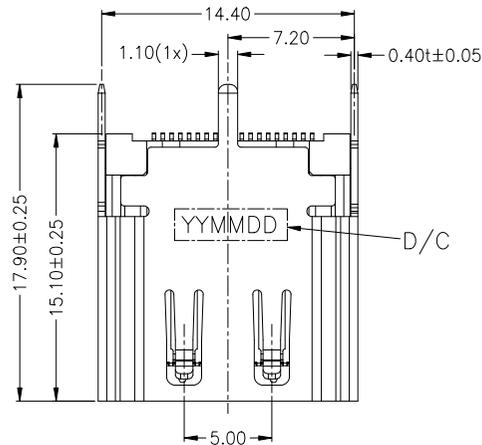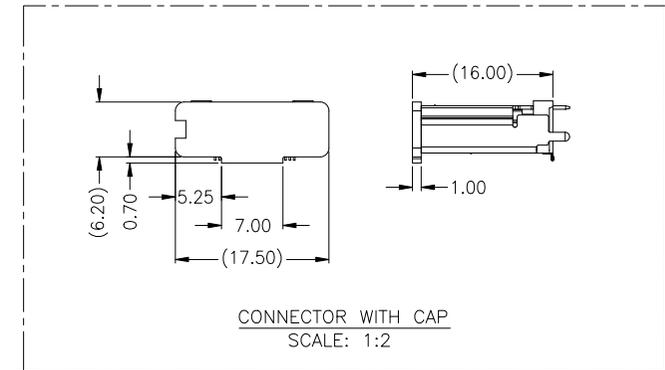

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	2022.11.10	LINEAR	ANGLES	1:1	Frey Yang	2022.11.10	HA-FH151SV-H0XX	ENDE05				
			0.0±0.35	X° REF±6°	APPROVED	Daniel Dong	2022.11.10	TITLE		REV	AO	SHEET	1/1
			0.00±0.25	X° ±3°	DESIGNER	Li Xing Ze	2022.11.10	HDMI A Type Receptacle SMT					
			0.000±0.15	X° X' ±2°	DRAWN			PRODUCT H=15.1mm					