
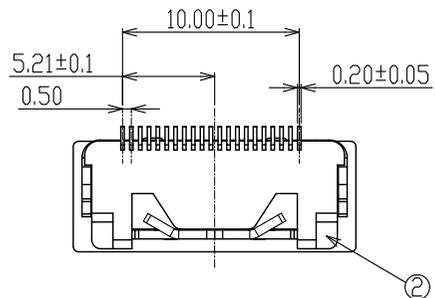
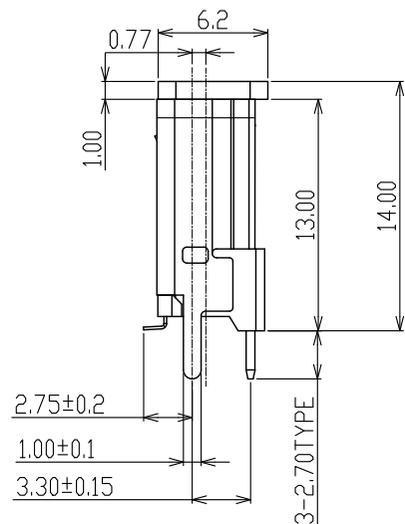
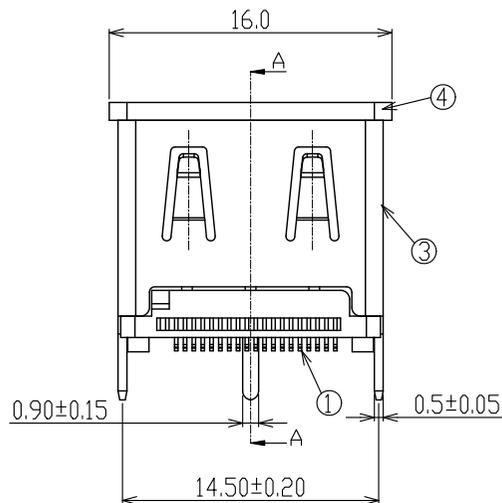
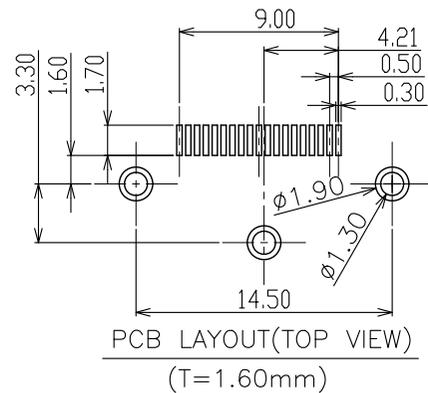


环保物料

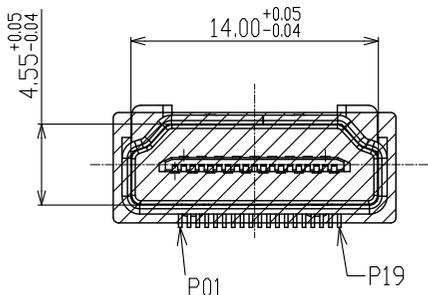

备注:

1) 材质:

- 1-1 本体:LCP 94V-0 黑色
- 1-2 端子:C2680
- 1-3 外壳:C2680或SPCC

2) 镀层:

- 2-1端子:所有面镀镍, 接点镀金(参照料号编码), 焊脚镀锡100u",

3) 技术规格

- 3-1. 额定电压:40V
- 3-2. 额定电流:0.5A
- 3-3. 绝缘电阻:100兆欧最小
- 3-4. 接触电阻:30毫欧最大
- 3-5. 操作温度:-20度到85度
- 3-6. 插入力:44.1N Max
- 3-7. 拔出力:9.8~44.1N;
- 3-8. 耐久:10000次

HA-F L130 S V -XX XX

1 2 3 4 5 6 7

- 1.HA:HDMI A TYPE
- 2.F:FEMALE
- 3.L130=直立式 板上高度13.00mm
- 4.S:SMT
- 5.V:180°
- 6.TYPE码:E1:外壳SPCC E2:外壳C2680
- 7.Contact Area plating on contacts
- 01: G/F 03: Au 3u"
- 05: Au 5u" 10: Au 10u"
- 15: Au 15u" 30: Au 30u"

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS	
A0	The new version file were released	21.07.09		LINEAR	ANGLES	1:1						APPROVED
A1	换图框发行	23.03.29	0.0 ± 0.38	X° REF ± 6°		DESIGNER	Daniel Dong	22.06.15	TITLE			
			0.00 ± 0.25	X° ± 3°		DRAWN	Li Xing Ze	22.06.15	HDMI AF 19PIN SMT L=16.70 (带吸取盖)			
			SIZE: A4	0.000 ± 0.15	X° X' ± 2°				REV	A1	SHEET	1/1