

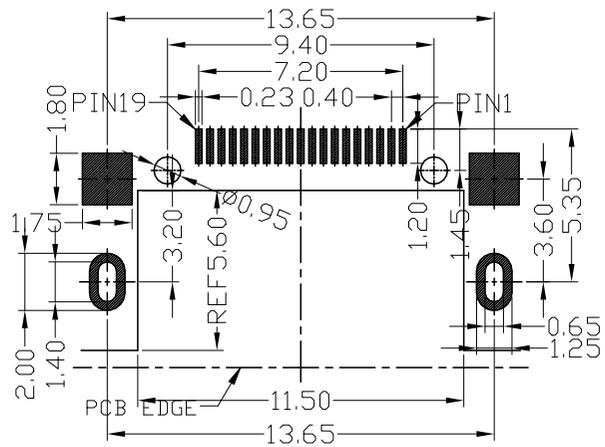
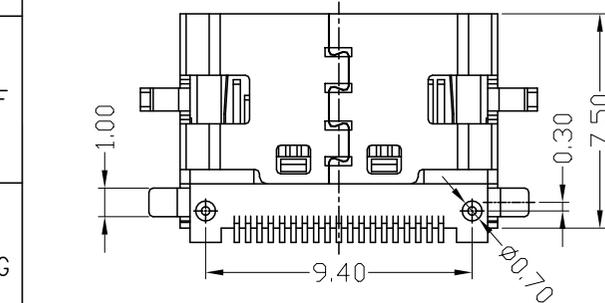
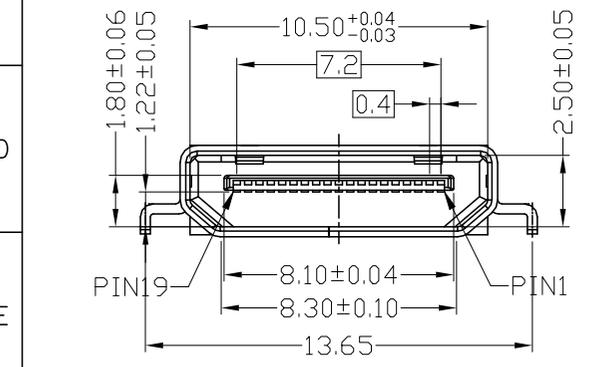
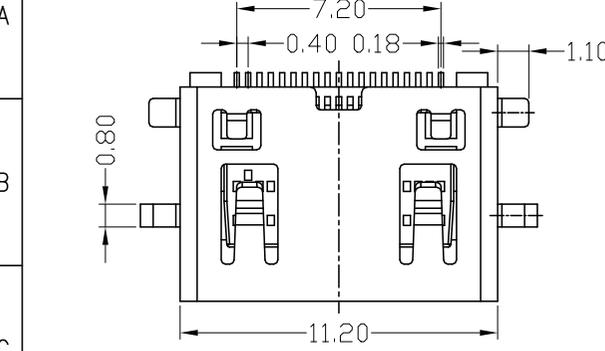
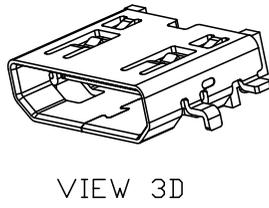


环保物料

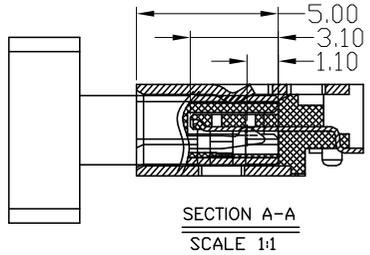

RECOMMENDED PCB LAYOUT
T=1.00mm Min (TOL:±0.05)

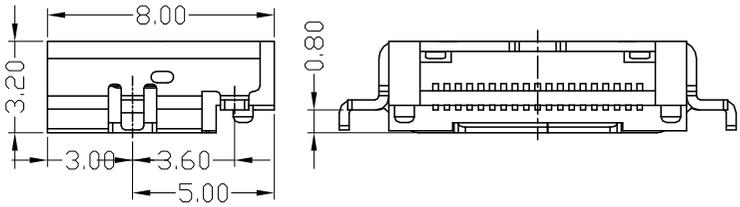

NOTE:
1. MATERIAL:
HOUSING: LCP BLACK. UL 94V-0
CONTACTS: C5120.
SHELL: C2680
2. FINISHED
CONTACTS: GOLD FLASH PLATED ON CONTACT AREA,
30U" MIN. NICKEL UNDERPLATING OVER ALL
SHELL: GOLD FLASH UNDERPLATING OVER ALL
30U" MIN. NICKEL UNDERPLATING OVER ALL

SPECIFICATION:
1. MATING FORCE:44.1N MAX
2. UNMATING FORCE:7-25N
3. DURABILITY:5000CYCLES MIN
4. CURRENT:0.5A
5. VOLTAGE:40V MAX
6. WITHSTANDING VOLTAGE:500V AC MIN. (UNMATED)
7. CONTACT RESISTANCE:30mΩ MAX.
8. INSULATION RESISTANCE:100MΩ MIN. (UNMATED)
9. OPERATION TEMPERATURE RANGE:-20° C TO +85° C
10. ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS REQUIREMENT.

HC - F C080 S R - E0 01
1 2 3 4 5 6 7

- 1. HC:HDMI C TYPE
- 2. F:FEMALE
- 3. C080=沉板0.8mm
- 4. S:SMT
- 5. R:90° V:180°
- 6. TYPE码:E0:正常规格
- 7. Contact Area plating on contacts
01: G/F

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	新图面发行	21.03.09		LINEAR	ANGLES	1:1								
A1	换图框发行	22.11.14	0.00±0.25	X° REF±6°	DESIGNER	Daniel Dong	22.11.14	TITLE	HDMI C 沉板0.8					
			0.00±0.15	X° X' ±2°	DRAWN	August Dai	22.11.14							
			SIZE: A4						REV	A1	SHEET	1/1		