
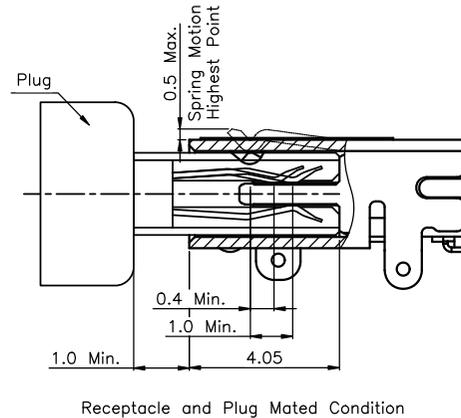
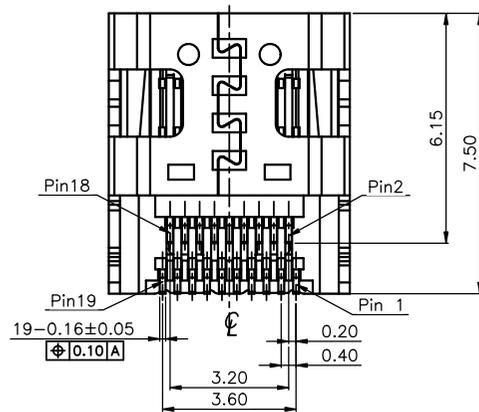
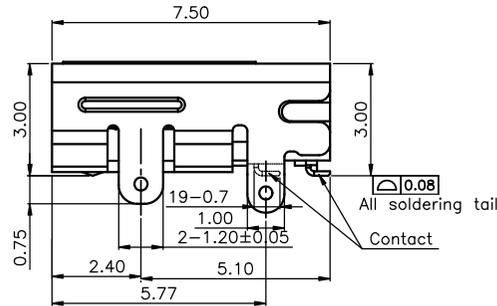


RECOMMENDED PCB LAYOUT

- NOTES:
 1.ELECTRONIC:
 CONTACT RESISTANCE: 30mohm MAX
 INSULATION RESISTANCE: 1000 Mohm MIN
 WITHSTAND VOLTAGE: AC 500V,1min.
 2.MECHANICAL:
 DURABILITY: 10000 CYCLE.
 3.ENVIRONMENT CHARACTERISTICS:
 OPERTING TEMPERATURE: -55°C TO +105°C

HD-F C155 S R -E5 01
 1 2 3 4 5 6 7

- 1.HD:HDMI D TYPE
 2.F:FEMALE
 3.C155=中心高1.55mm
 4.S:SMT
 5.R:90°
 6.TYPE码:E5:正常规格
 7.Contact Area plating on contacts
 01: G/F

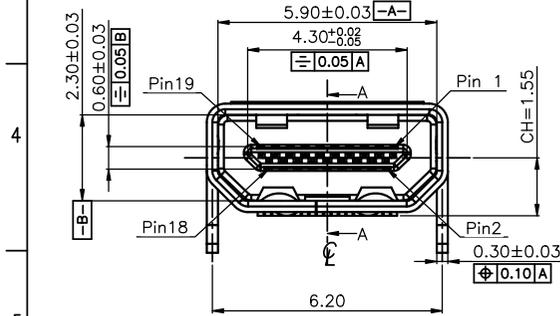

3	SHELL	1	C2680 T0.30	NI PLATED
2	CONTACT	19	C5191 T=0.12	AU GF / MATTE TIN 100U
1	HOUSING	1	LCP BLACK	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

					一般公差GENERAL TOLERANCE		CUSTOMER DRAWING		料号 PART NO.		
					X.X ±0.35	X' ±5'	绘图 DR. 李兴泽		Fuconn Industrial Electronics Limited		
					X.XX ±0.25	X.X' ±2'	审核 CHK. 董东平		HD-FC155SR-E501		
					X.XXX ±0.15	▲ MAJOR DIM.	核准 APPD. 杨章雄		文件编号 NUMBER C-HE95		
A0	2023.03.14	换图框发行	董东平	杨章雄	单位 UNIT	mm	核准 APPD. 杨章雄		品名 TITLE		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.					HDMI Type D 19Pin, 板上型CH=1.55 双排SMT		
									比例 SCALE	SHEET	版次 REV.
									1/1	1/1	A0