

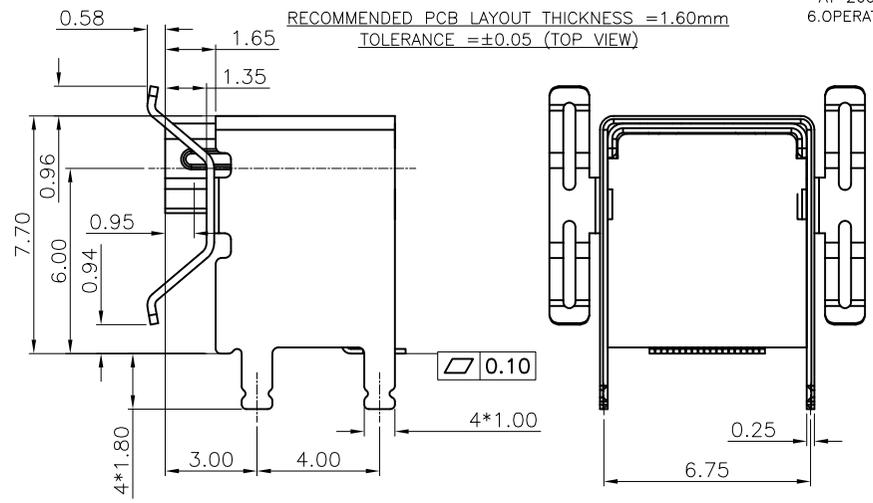



- NOTES:
- MATERIAL SPECIFICATION
 - HOUSING: LCP+30% G.F
 - CONTACT: C5191-H T=0.15mm.
 - INNER SHELL: SUS304-1/2H T=0.30mm.
 - OUTERSHELL: SUS304-1/2H T=0.30mm.
 - PLATING SPECIFICATION
 - CONTACT: NI40u" UNDER PLATED, GOLD FLASH PLATED ON THE FUNCTIONAL AREA OF CONTACT, GOLD PLATING OR TIN ON SOLDER AREA.
 - SHELL: NICKEL PLATED.
 - MECHANICAL PERFORMANCE
 - INSERTION FORCE: 44.1N (4.5 KGF) MAX.
 - WITHDRAWAL FORCE: 4.9N~25N(0.5KGF~2.5KGF).
 - DURABILITY: 5000 CYCLES.
 - ELECTRICAL PERFORMANCE
 - CURRENT RATING: 0.3A.
 - LLCR: CONTACT: 30 mΩ MAX(INITIAL), SHELL: 50 mΩ MAX(INITIAL).
 - INSULATION RESISTANCE:
 - UNMATED: 100 MΩ MIN. AT 500V DC.
 - MATED: 10 MΩ MIN. AT 150V DC.
 - DIELECTRIC WITHSTAND VOLTAGE:
 - 150V AC/60S(MATED), 250V AC/60S(UNMATED).
 - IR REFLOW:
 - THE PEAK TEMPERATURE ON BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260±5°C.
 - OPERATING TEMPERATURE RANGE: -20°C~85°C(WITHOUT LOSS FUNCTION).

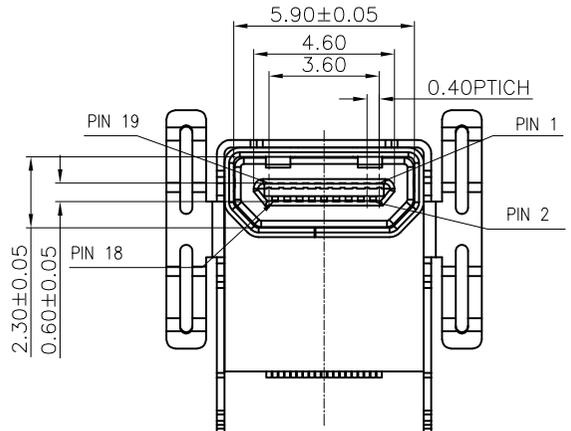

HD-F C600 R R -E5 XX
 1 2 3 4 5 6 7

- HD:HDMI D TYPE
- F:FEMALE
- C600=中心高6.00mm
- R:DIP+SMT
- R:90°
- TYPE码:E5:加高型规格
- Contact Area plating on contacts
 01: G/F 30: Au 30u"

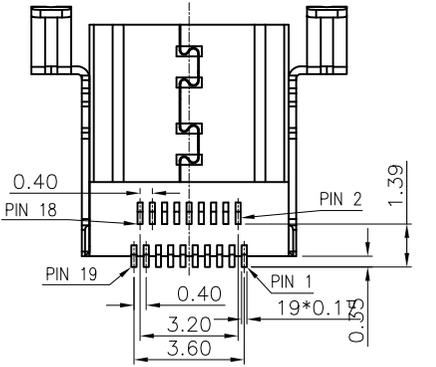

					一般公差 GENERAL TOLERANCE		CUSTOMER DRAWING		料号 PART NO. HD-FC600RR-E5XX				
					X.X ±0.30	X' ±5'	绘图 DR. 李兴泽		Fuconn Industrial Electronics Limited				
					X.XX ±0.20	X.X' ±2'	审核 CHK.		文件编号 NUMBER C-HE95				
					X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.		品名 TITLE HDMI DF SMT 双外壳 加高型CH=6.00 带弹片				
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT mm						比例 SCALE 1/1	SHEET 1/1	版次 REV. A1