

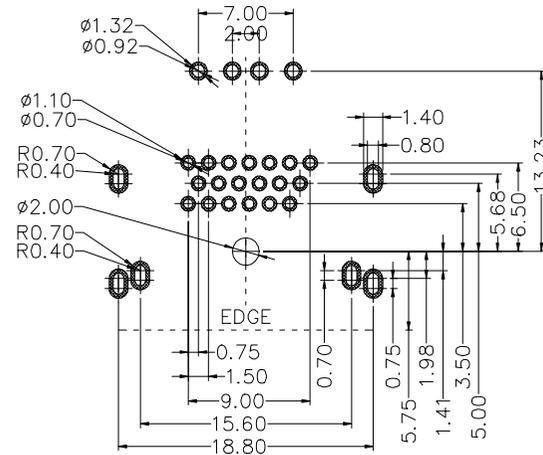
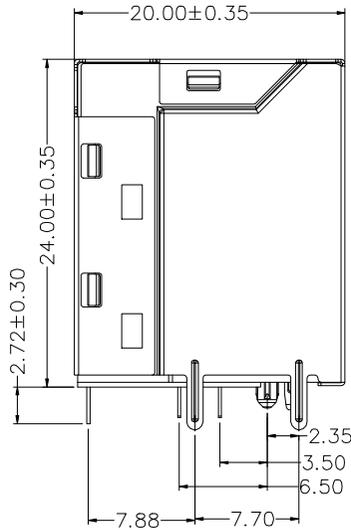


NOTE:

1.
 - 1.1 HOUSING PLASTIC :PBT,BLACK,UL94V-0.
 - 1.2 TERIMINAL:C5191.
 - 30U'MIN NICKEL UNDERPLATING OVERALL.
 - FLASH GOLD PLATING ON CONTACT AREA.
 - 1.3 SHELL:C2680 OR H65.
 - 30U'NICKEL PLATING OVERALL.
- 2.HDMI MATERIAL:
 - 2.1 HOUSING PLASTIC:LCP,BLACK,UL94V-0
 - 2.2 TERIMINAL:C2680
 - FLASH GOLD PLATING ON CONTACT AREA.
 - 30U'NICKEL UNDERPLATED OVERALL.
 - 2.3 SHELL:C2680 OR H65.30U'NICKEL PLATING OVERALL.
- 3.ELCTRICAL PERFORMANCE :
 - 3.1 VOLTAGE CURRENT RATING : 1.5 AMP. 30V AC.
 - 3.2 INSULATION RESISTANCE: 1000M Ω Min.
 - 3.3. CONTACT RESISTANCE : 40 m Ω Max.
 - 3.4 DIELECTRIC WITHSTANDING VOLTAGE:500V AC.
- 3.OPERATING TEMPERATURE: -45°C to $+85^{\circ}\text{C}$.
- STORAGE TEMPERATURE: -45°C to $+85^{\circ}\text{C}$.

HU-F A240 D R -E2 01
1 2 3 4 5 6 7

- 1.HU:HDMI+USB 2.0
- 2.F:FEMALE
- 3.A240:板上高24.00mm
- 4.D:DIP
- 5.R:90'
- 6.TYPE码:E2:双层
- 7.Contact Area plating on contacts
01: G/F

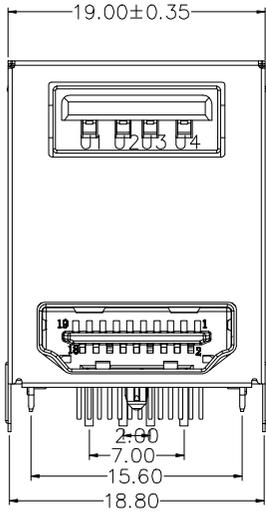

RECOMMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	
A0	新图面发行	21.07.07		LINEAR	ANGLES	1:1					
A1	换图框发行	23.11.05	0.00±0.25	X° REF±6°	APPROVED			HU-FA240DR-E201	ENDE05		
			0.00±0.10	X° ±3°	DESIGNER			TITLE			
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	23.11.05	USB2.0 +HDMI		