
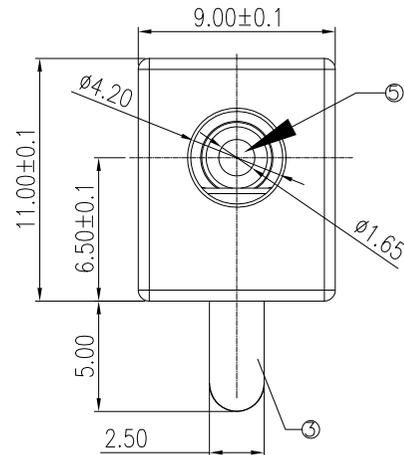


ROHS 2.0 HF



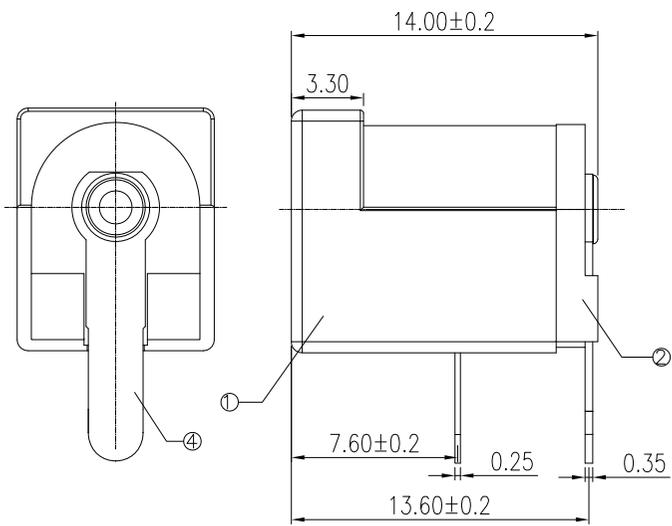


ELECTRICAL CHARACTERISTICS:

1. RATING: DC 30V, 1.0AMP.
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100MΩ MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.
5. INSERTION AND EXTRACTION FORCE: 3~20N.
6. LIFE TEST: 5000 CYCLES.
7. OPERATING TEMPERATURE : -55°C TO +105°C.

J0-1 E65 D R 1 2 B 0-00 2E
 1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
- 2.1:φ1.65mm
- 3.E65=板上中心高6.50mm
- 4:D:PIN
- 5.R:90°
- 6.1:无外壳
- 7.2:2PIN
- 8.B:PBT
- 9.0:无柱无啉拉
- 10.TYPE 码:00
- 11:2E: Tin plating

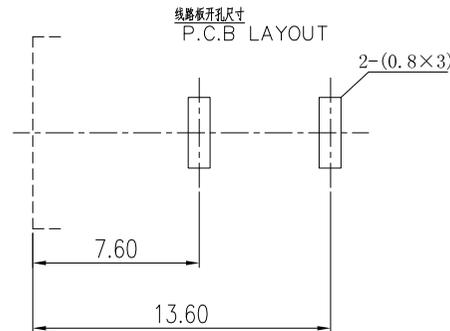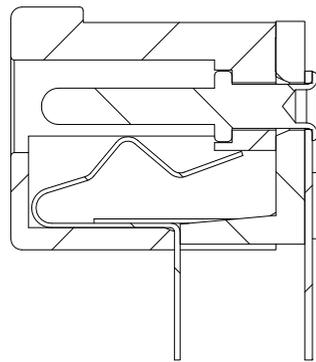




5	PIN	1	BRASS		TIN-Plating
4	CURVE PIECE	1	BRASS		TIN-Plating
3	SPRING PIECE	1	BRONZE		TIN-Plating
2	COVER	1	PBT	BLACK	
1	HOUSING	1	PBT	BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
A0	新图面发行	22.09.03		LINEAR	ANGLES	1:1								Frey Yang	22.09.03
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	Daniel Dong	22.09.03	TITLE			REV	A0	SHEET	1/1
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	CHEN HONGHXIN	22.09.03							

ROHS 2.0 HF

BUBBLE BAG


PE

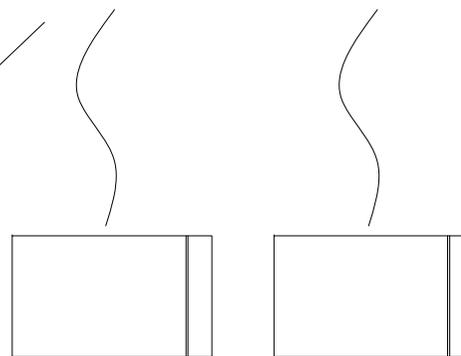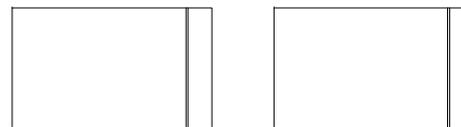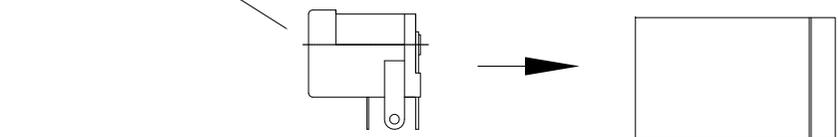

6包

6包

CARTON

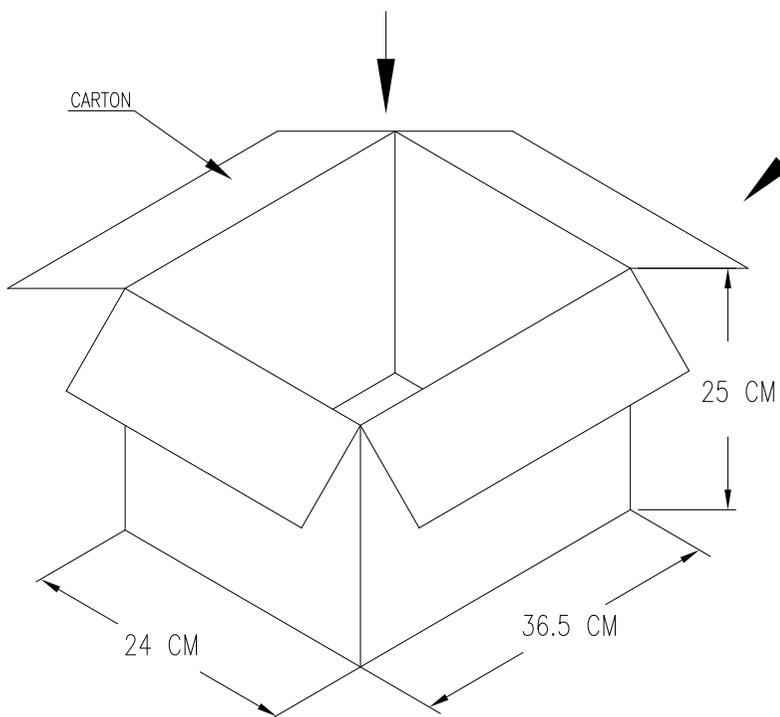

PCS/PE	500
PE/BOX	12
TOTAL (PCS)	6000
CTN SIZE	36.5X24X25 CM
NW	
GW	
TRAY MATERIAL	PVC ,TRANSPARENT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS	
A0	新图面发行	22.09.03		UNIT: MM	LINEAR	ANGLES	APPROVED	Frey Yang	22.09.03	JO-1E65DR12B0-002E		ENDE05
			SIZE: A4	0.0±0.35	X° REF±6°	DESIGNER	Daniel Dong	22.09.03	TITLE			
				0.00±0.25	X° ±3°	DRAWN	CHEN HONGXIN	22.09.03	DC POWER JACK DIP 90度			
				0.00±0.10	X° X' ±2°				REV	AO	SHEET	1/1