


环保物料





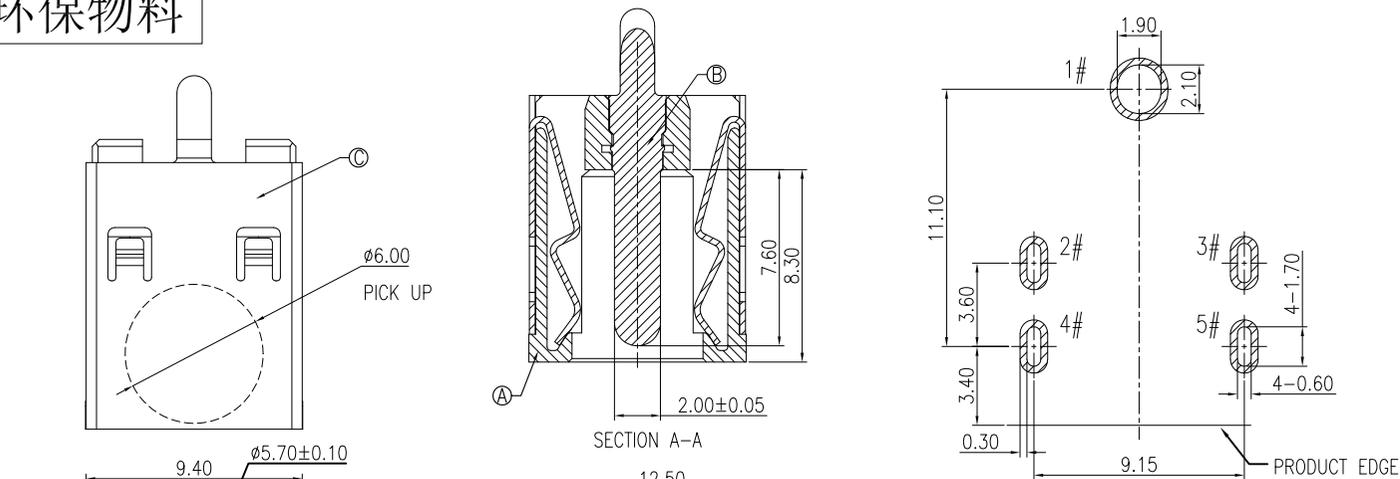


SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30mΩ MAX(INITIAL).
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

JO-2 E35 D R 0 5 T 0-01 01
1 2 3 4 5 6 7 8 9 10 11

- 1.JO:DC JACK
- 2.2:∅2.0mm
- 3.E35=板上中心高3.5mm
- 4.D:DIP
- 5.R:90°
- 6.O:带外壳
- 7.5:5PIN
- 8.T:10T
- 9.柱子/唛啦 O:无柱无唛啦
- 10.TYPE 码 01:
- 11.Contact Area plating on contacts
01: G/F

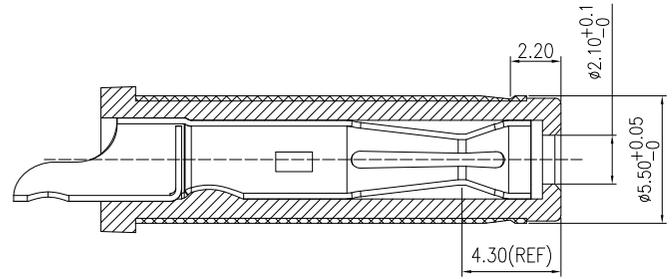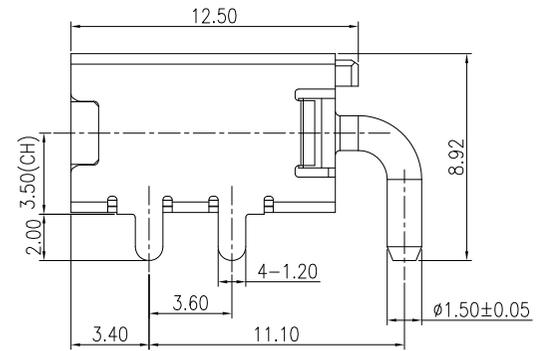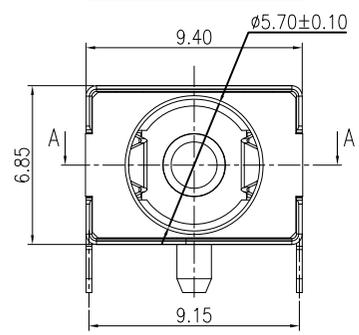

MATING PLUG

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	202	LINEAR	1:1	Frey Yang	2021.4.21	JO-2E35DR05T0-0101	ENDE05				
			0.0 ± 0.35	APPROVED	Daniel Dong	2021.4.21	TITLE Φ5.5 卧式 DC POWER JACK					
			X° REF ± 6°	DESIGNER	Li Xing Ze	2021.4.21						
			0.00 ± 0.25	DRAWN								
			UNIT: MM						REV	XO	SHEET	1/1