

环保物料

A

B

C

D

E

F

G

H

A

B

C






D

E

F

G

H

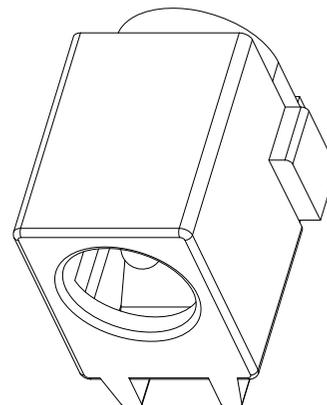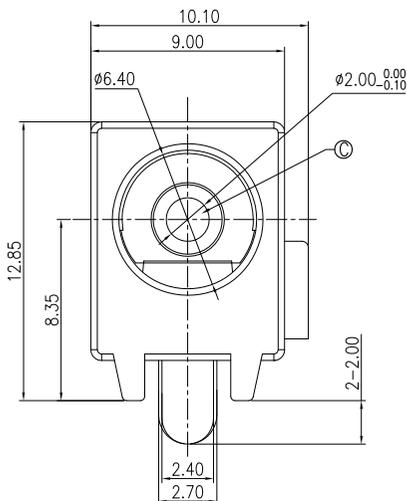
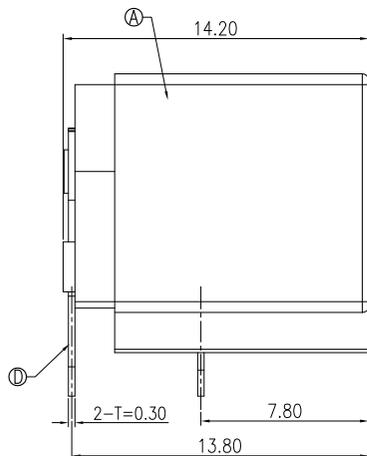
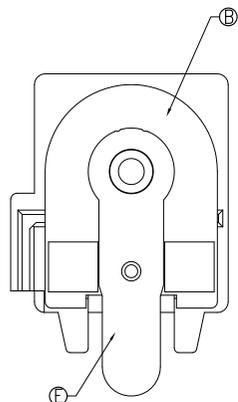
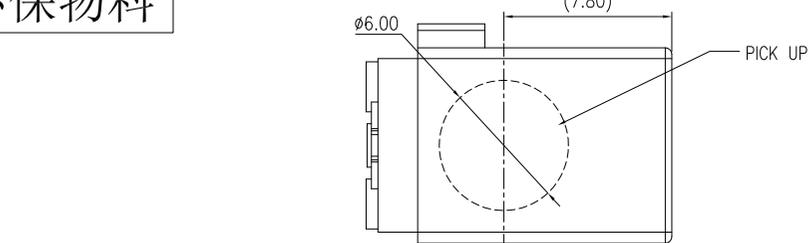


SPECIFICATION:

1. RATING: DC 50V 3A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

JO-2 E83 D R 0 2 T 0-02 2E
1 2 3 4 5 6 7 8 9 10 11

- 1.JO:DC JACK
- 2.2:∅2.0mm
- 3.E83=板上中心高8.35mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2:2PIN
- 8.T:10T
- 9.柱子/唛啦 0:无柱无唛啦
- 10.TYPE 码 02:
- 11.Contact Area plating on contacts
2E:Tin plating

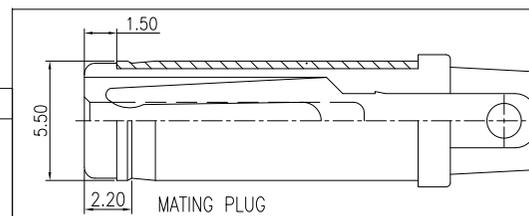

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

E	PLATE	BRASS	Sn60u" MIN./Ni 50u" MIN.	1
D	SPRING	COPPER ALLOY	Sn60u" MIN./Ni 50u" MIN.	1
C	CENTER PIN	BRASS	Sn60u" MIN./Ni 50u" MIN.	1
B	COVER	PA10T	BLACK	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.
AO	The new version file were released	2022.6.28	LINEAR	ANGLES	1:1	Frey Yang	2022.6.28		
			0.0 ± 0.30	X° REF ± 6°	APPROVED	Daniel Dong	2022.6.28	JO-2E83DR02T0-022E	ENDE05
			0.00 ± 0.20	X° ± 3°	DESIGNER	Li Xing Ze	2022.6.28		
			0.000 ± 0.10	X° X' ± 2°	DRAWN		2022.6.28		

TITLE	
Φ5.5 H11.5卧式 DC POWER JACK	

JCTC®
TERMINAL&CONNECTORS

REV	AO	SHEET	1/1
-----	----	-------	-----