

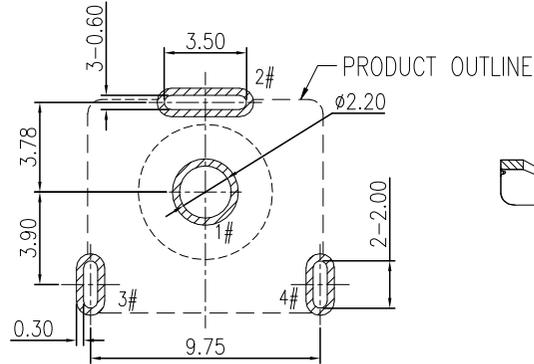
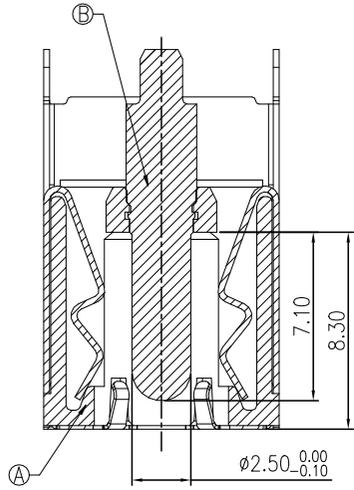




环保物料

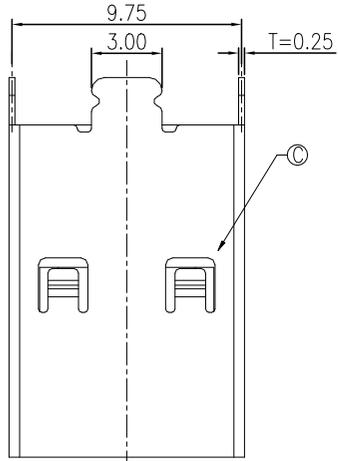

RECOMMENDED PCB LAYOUT  
TOP VIEW TOLERANCE:±0.05

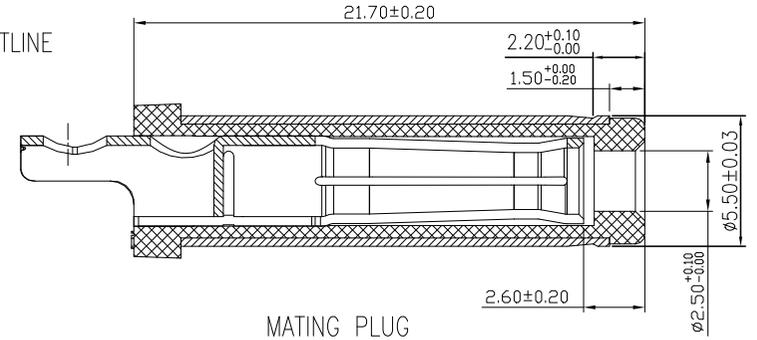

MATING PLUG

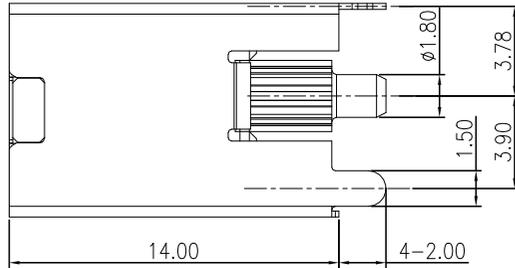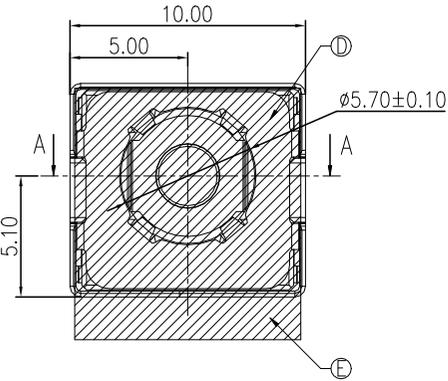



SECTION A-A

J0-2 H14 D V 0 4 T 0-05 01  
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
- 2.2:φ2.5mm
- 3.H14=直立式, 板上高度14.00mm
- 4.D:DIP
- 5.V:180°
- 6.0:带外壳
- 7.4:4PIN
- 8.TYPE T
- 9.柱子/唛啦 0:无柱有唛啦
- 10.TYPE 码 05:
- 11.Contact Area plating on contacts
- 01: G/F

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:  
30mΩ MAX.(INITIAL)  
50mΩ MAX.(FINAL)
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

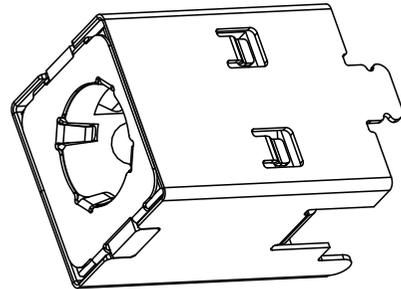

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	2021.06.03	LINEAR	ANGLES	1:1	Frey Yang	2021.06.03	J0-2H14DVO4TO-0501	ENDE05				
			0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	2021.06.03	TITLE Φ5.5 立式(H=14.0) DC POWER JACK		REV	AO	SHEET	1/1
			0.00±0.20	X° ±3°	DESIGNER	Li Xing Ze	2021.06.03						
			0.000±0.10	X° X' ±2°	DRAWN								