

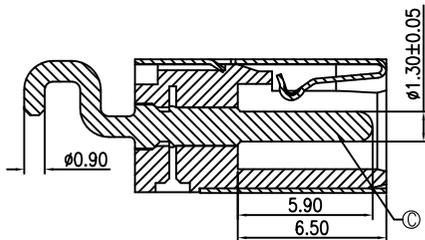



环保物料

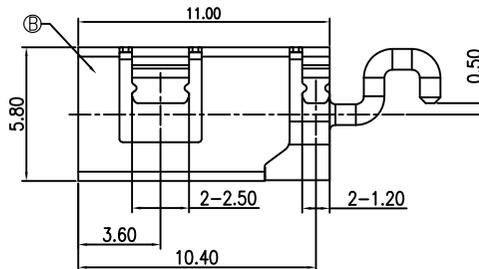

SECTION A-A



SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 13N~30N
6. EXTRACTION FORCE: 13N~30N
7. DURABILITY: 5,000 CYCLES

J0-3 B18 D R 0 5 T 0-00 2E

1 2 3 4 5 6 7 8 9 10 11

1.J0:DC

2.3:ø3.5mm

3.B18=沉板-1.8mm

4.D:DIP

5.R:90°

6.0:带外壳

7.5:5PIN

8.T:10T


9.柱子/唛啦

0:无柱无唛啦




10.TYPE 码 00:

11.Contact Area plating on contacts

2E:Tin plating

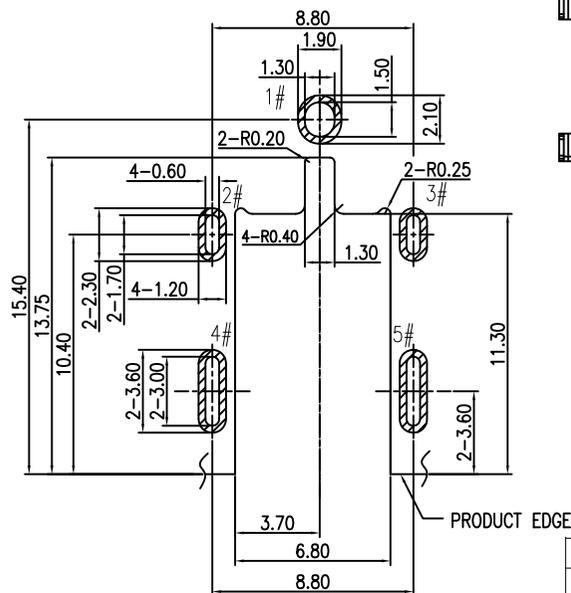


RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05

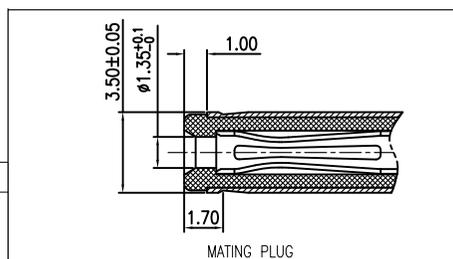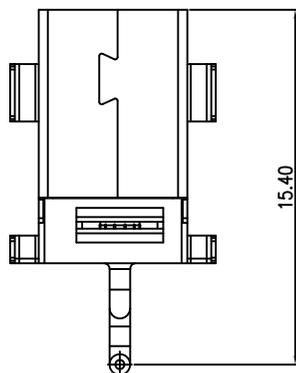


C	CENTER PIN	HB159	Sn100u"/Ni 50u"	1
B	SHELL	C5210	Ni 50u"	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.12.07		LINEAR	ANGLES	1:1	Frey Yang	21.12.07				J0-3B18DR05T0-002E	ENDE05	
			0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	21.12.07	TITLE						
			0.00±0.25	X° ±3°	DESIGNER	Micky Ma	21.12.07	ø3.5沉板式 (CH-2.0) DC POWER JACK						
			UNIT: MM	0.00±0.10	X° X' ±2°	DRAWN					REV	A0	SHEET	1/1

环保物料

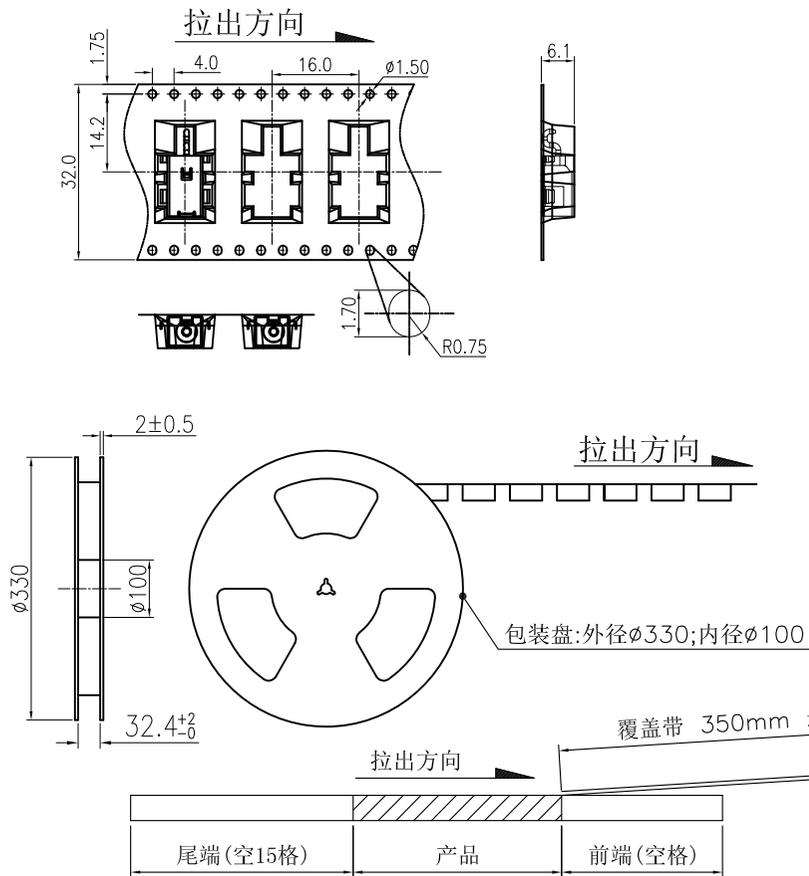


包装盘标签




总共10层

PE袋:

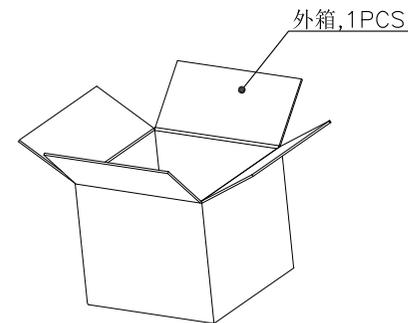

外箱, 1PCS



透明胶带

备注:

1. 材料规格:
 - 1.1 载带: T=0.50mm, 黑色
 - 1.2 包装盘: 蓝色
 - 1.3 纸箱: L=335, W=335, H=380
2. 包装数量: 600PCS/卷, 10卷(6000PCS)/箱
3. 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	21.12.07		LINEAR	ANGLES	1:1	Frey Yang	21.12.07	J0-3B18DR05T0-002E	ENDE05				
			0.00±0.25	X° ±3°	DESIGNER	Daniel Dong	21.12.07	TITLE Φ3.5沉板式 (CH-2.0) DC POWER JACK			REV	A0	SHEET	1/1
			0.00±0.10	X° X' ±2°	DRAWN	Micky Ma	21.12.07							

1

2

3

4

5

6

7

8