

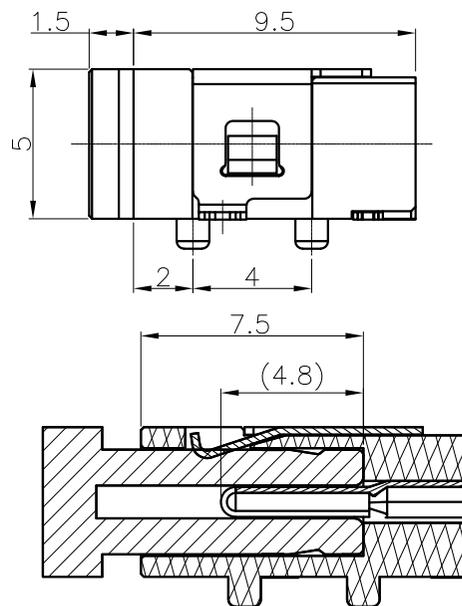


环保物料

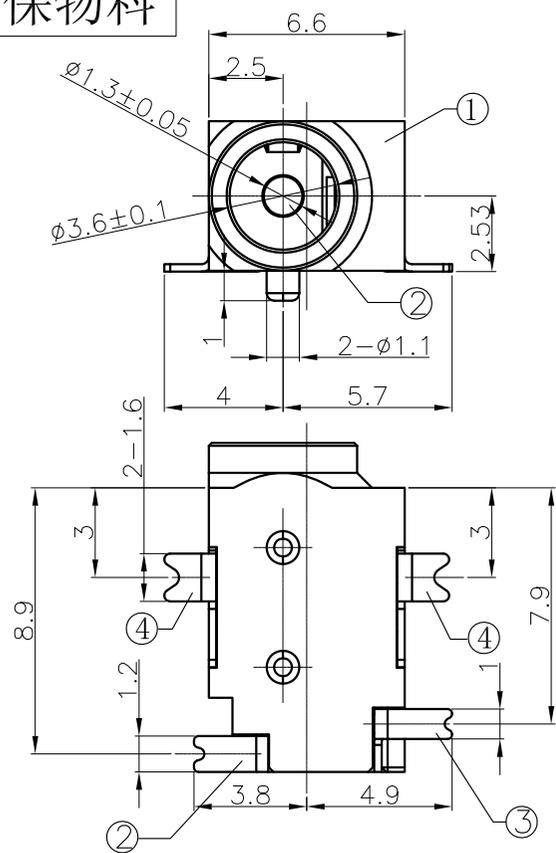


Plug Matching Diagram

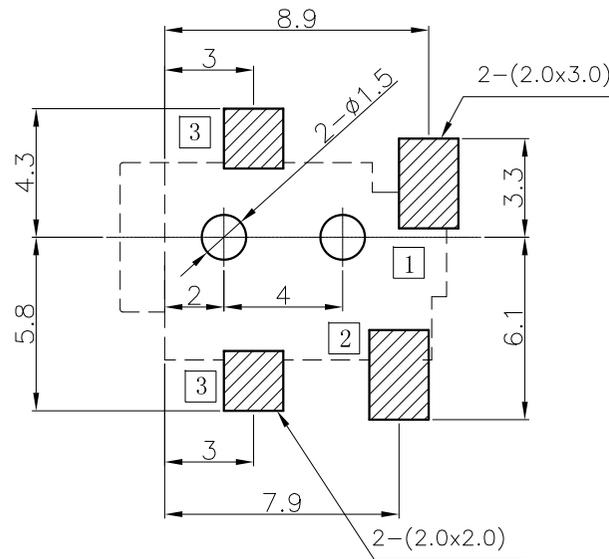

PCB HOLES(TOP VIEW) t=1.0mm
NOTE: GENERAL TOLERANCE: ±0.05mm


Specification:

1. Rating : DC 30V 2A;
2. Contact resistance: ≤30mΩ;
After test: ≤50mΩ
3. Insulation resistance: ≥100MΩ(250VDC);
After test: ≥50MΩ
4. Withstand voltage: 250VAC ;
5. Insertion and extraction force: 3N~30N;
6. life test: 5000cycles min;
7. Operation temperature range: -20°C~70°C ;
8. Preservation temperature range: -40°C~85°C ;



J0-3 C00 D R 1 3 T 2-00 21
1 2 3 4 5 6 7 8 9 10 11


- 1.J0:DC
- 2.3:φ3.5mm
- 3.C00=沉板0.0mm
- 4.D:DIP
- 5.R:90°
- 6.1:无外壳
- 7.3:3PIN
- 8.T:10T
- 9.柱子/麦拉
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
- 21:Silver plating
- 2:带两个柱子无麦拉

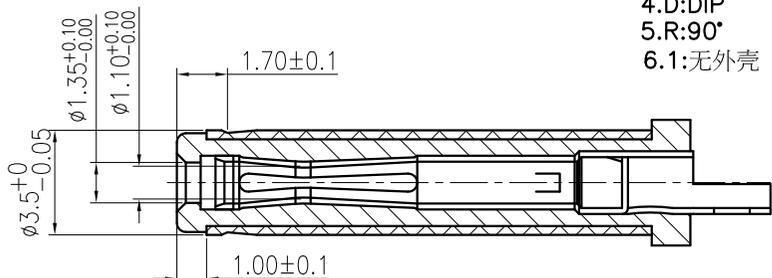


④	Tip spring II	③	1	C5210	Ag-Plating
③	Tip spring I	②	1	C5210	Ag-Plating
②	Center pin	①	1	C2680	Ag-Plating
①	Housing		1	PA10T	Black,HF
NO.	DESCRIPTION	QTY	MATERIAL		PLATING

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.02.21	LINEAR	ANGLES	1:1	Frey Yang	22.02.21	J0-3C00DR13T2-0021	ENDE05				
			0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.02.21	TITLE	φ3.50Xφ1.35 H5.0 3极-卧式 DC POWER JACK				
			0.00±0.25	X° ±3°	DESIGNER	CGY	22.02.21						
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN				REV	AO	SHEET	1/1

环保物料

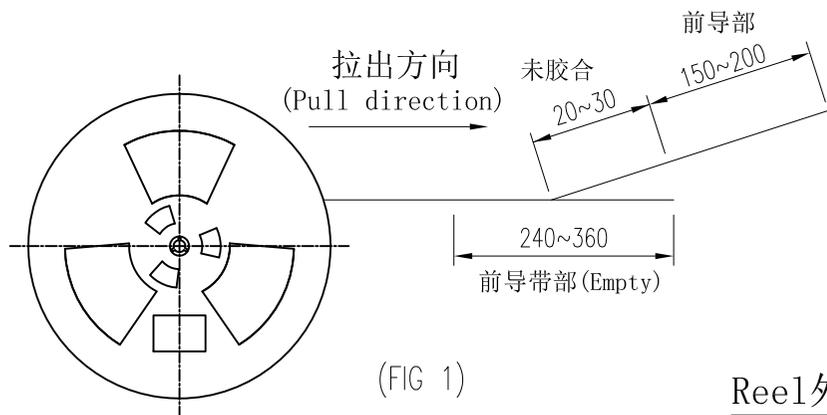


(FIG 1)

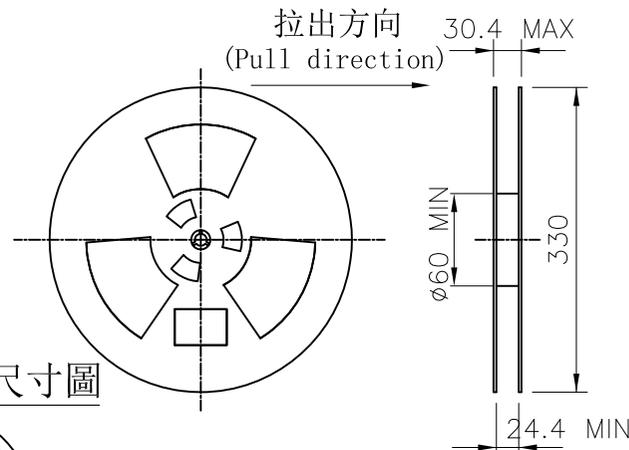


(FIG 3)

Reel外觀尺寸圖



1 REEL
= 500 PCS

- 1.The connector can not be loaded on the position of length 240~360mm in the reel tape and lead tape.The cover tape with 20~30mm length shall not be adhesive on the lead tape and the cover tape is lead portion shall have 150~200mm length (Refer FIG 1).
- 2.Tape shall turn on right direction.
- 3.The direction of connector is fixed regarding the position of terminal,please refer outline drawing (Refer FIG 2).
- 4.After winding,using the adhesive tape(30~50mm) to stick the leader of cover tape on the side of reel.
- 5.One reel can be loaded 500 pcs connector.
- 6.The label shall be pasted on the front side of reel (Refer FIG 3).
- 7.Condition of 300mm per minute ,the extraction strength of cover tape shall reach 20~150 gf.
- 8.If the quantity is less then 6 reel in one carton,the packing shall be able to resist to shark.

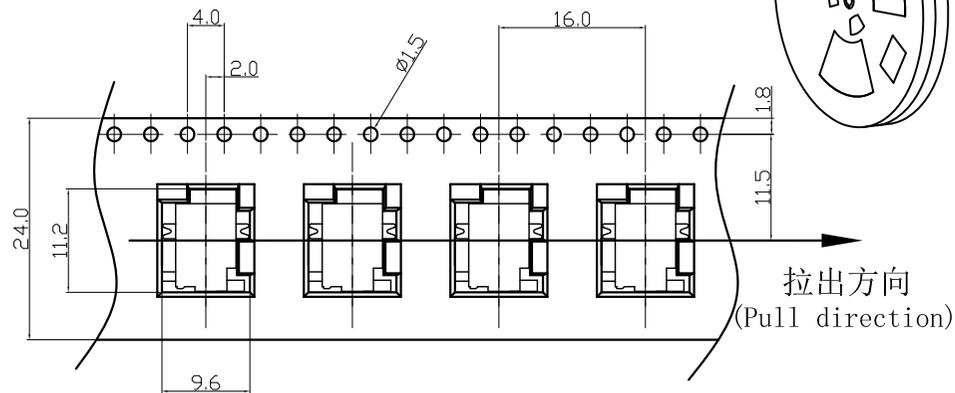

(FIG 2)

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.02.21	LINEAR	ANGLES	1:1	Frey Yang	22.02.21	J0-3C00DR13T2-0021	ENDE05				
			0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.02.21	TITLE Φ3.50XΦ1.35 H5.0 3极-卧式 DC POWER JACK					
			0.00±0.25	X° ±3°	DESIGNER	CGY	22.02.21						
			UNIT: MM	0.00±0.10	X° X' ±2°	DRAWN				REV	AO	SHEET	1/1

1

2

3

5

6

7

8