

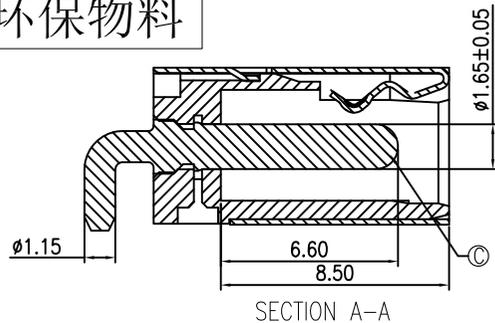



环保物料

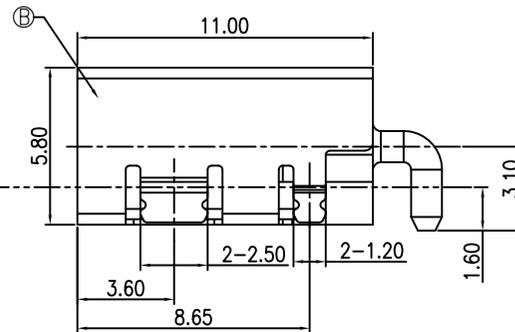


SECTION A-A

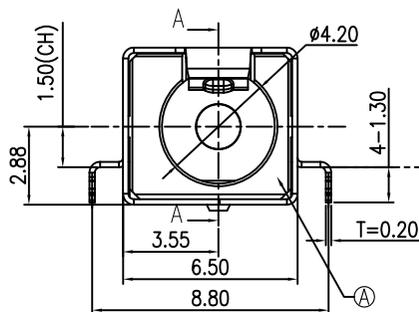


SPECIFICATION:

1. RATING: DC 20V 8A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

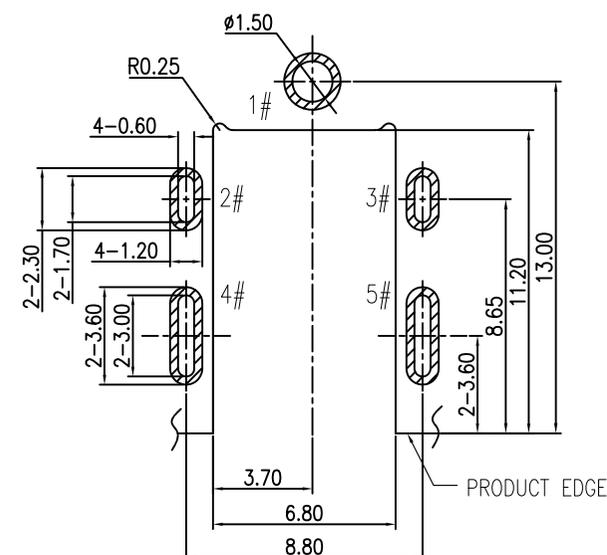


RECOMMENDED PCB LAYOUT(t=1.00)

TOP VIEW TOLERANCE: ±0.05

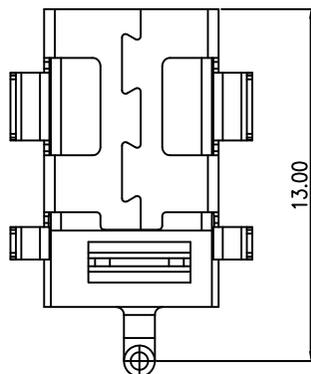

J0-3 C10 D R 0 5 T 0-02 01
1 2 3 4 5 6 7 8 9 10 11


- 1.J0:DC
- 2.3:φ3.5mm
- 3.E15=板上中心高1.5mm
- 4.D:DIP
- 5.R:90°
- 6.O:带外壳
- 7.5:5PIN
- 8.T:10T
- 9.柱子/喇叭
- 0:无柱无喇叭
- 10.TYPE 码 02
- 11.Contact Area plating on contacts
- 01: G/F

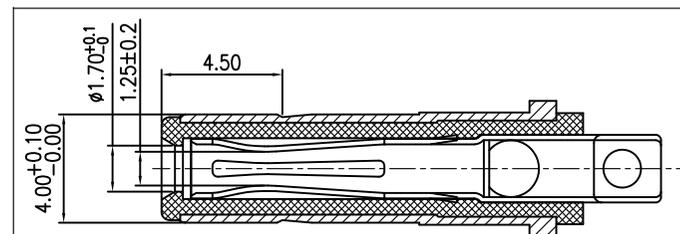

MATING PLUG

DP400170-0038-60000H

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	PA10T	BLACK	1






REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
AO	The new version file were released	2021.12.29	LINEAR	1:1	Dong Dong Ping	2021.12.29	J0-3C10DR05T0-0201	ENDE05				
			0.0±0.25	APPROVED	Dong Dong Ping	2021.12.29	TITLE	Φ4.0沉板式(CH=1.5)				
			X° REF±6°	DESIGNER	Li Xing Ze	2021.12.29				DC POWER JACK		
			0.00±0.15	DRAWN								
			UNIT: MM						REV	AO	SHEET	1/1

环保物料



备注:

- 材料规格:
 - 载带: T=0.50mm, 黑色
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=380
- 包装数量:
 - 600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

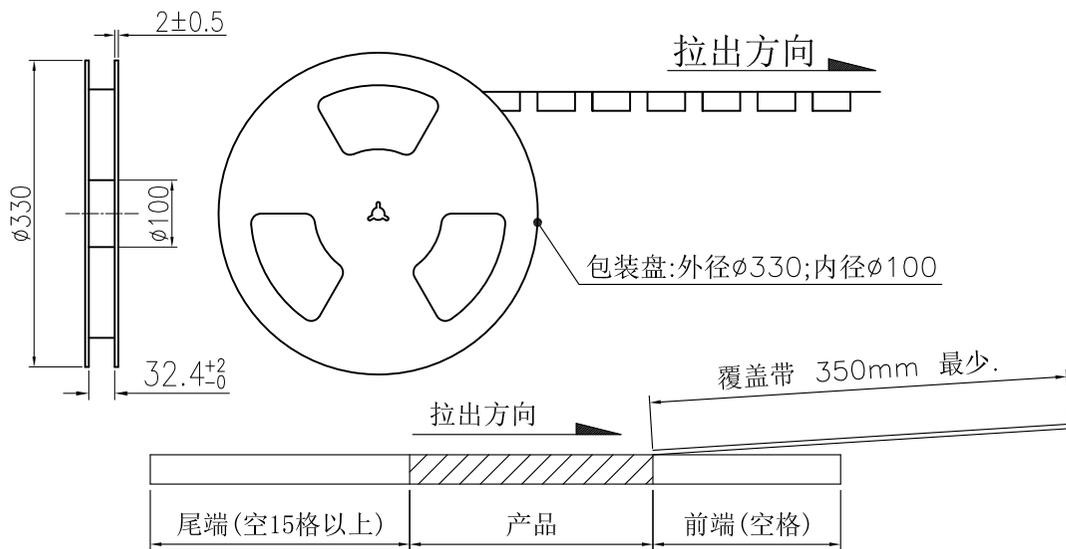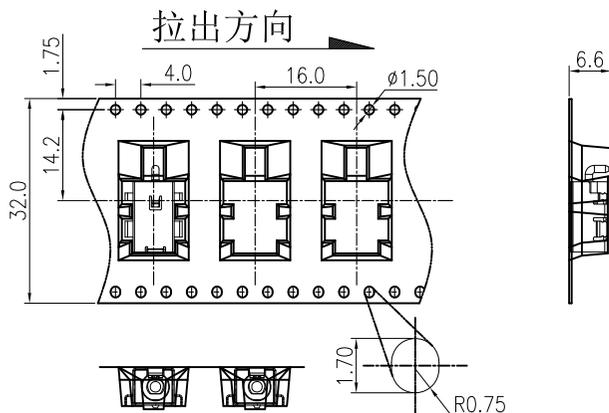

总共10层

PE袋:

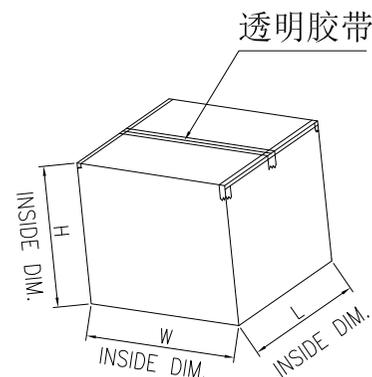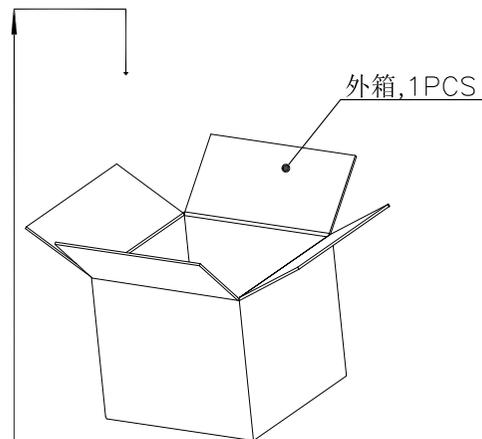

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
AO	The new version file were released	2021.12.29		LINEAR	ANGLES	1:1	Dong Dong Ping	2021.12.29	JO-3C10DR05T0-0201	ENDE05	
			0.00±0.15	X° ±3°	APPROVED	Dong Dong Ping	2021.12.29	TITLE Φ4.0沉板式(CH=1.5) DC POWER JACK			
			0.00±0.08	X° X' ±2°	DESIGNER	Dong Dong Ping	2021.12.29				
			SIZE: A4		DRAWN	Li Xing Ze	2021.12.29				