

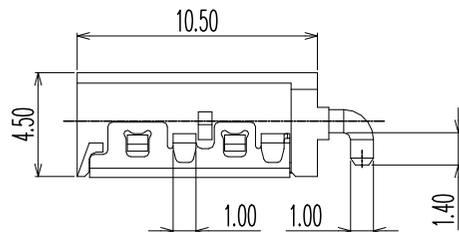
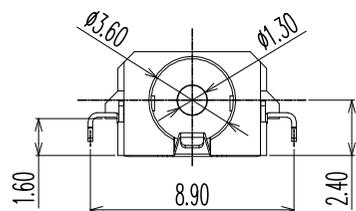
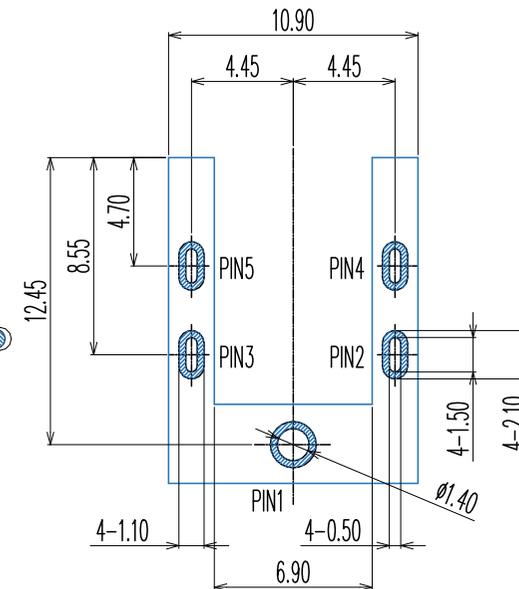
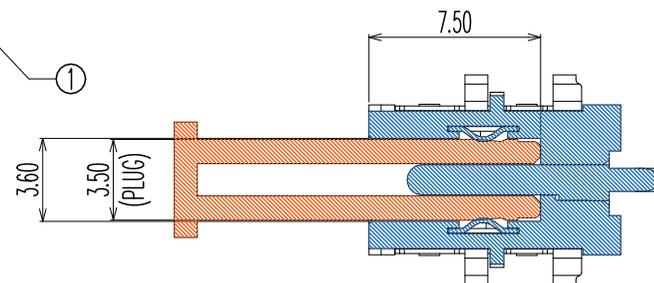
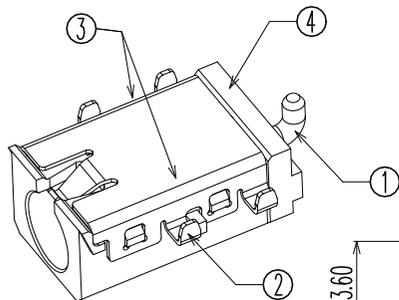


环保物料

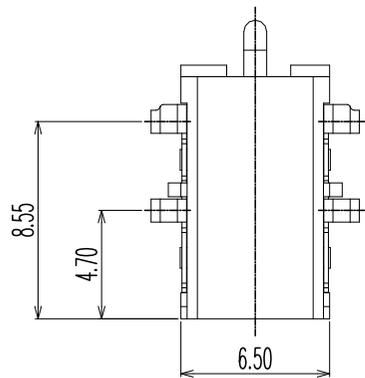


J0-3 C16 D R 0 5 9 0-32 1E  
1 2 3 4 5 6 7 8 9 10 11

NOTES:

- CURRENT RATING: 3A AC/DC MAX.
- CONTACT RESISTANCE: 30mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

- J0: DC JACK
- 3:  $\phi 3.5\text{mm}$
- C16= 沉板1.6mm
- D: DIP
- R: 90°
- 0: 带外壳
- 5: 5PIN
- 9: 9T
9. 柱子/啖啦 0: 无柱无啖啦
10. TYPE 码 32
11. Contact Area plating on contacts
- 1E: Ni plating

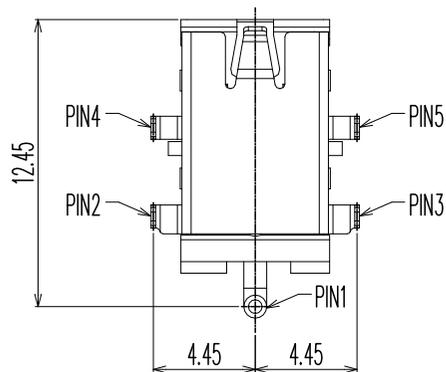

ITEM	NAME	Q'TY	DESCRIPTION
④	HOUSING	1	HIGH TEMPERATURE PLASTIC; BLACK
③	TERMINAL	2	PHOSPHOR BRONZE; NICKEL PLATING
②	SHELL	1	PHOSPHOR BRONZE; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE
①	CENTER PIN	1	BRASS; NICKEL UNDERPLATING OVERALL, GOLD PLATING ON THE WHOLE

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	21.05.27	LINEAR	1:1			J0-3C16DR0590-321E	ENDE05				
A1	换图框发行	23.12.28	ANGLES	APPROVED			TITLE					
			±0.30	±2°	DESIGNER		DC POWER JACK					
			UNIT: MM	0.00±0.25	X'±3°	DRAWN	Dalan Dai	23.12.28	REV	A1	SHEET	1/1
			SIZE: A4	0.000±0.15	X'X'±2°							

1

2

3

4

5

6

7

8