



环保物料

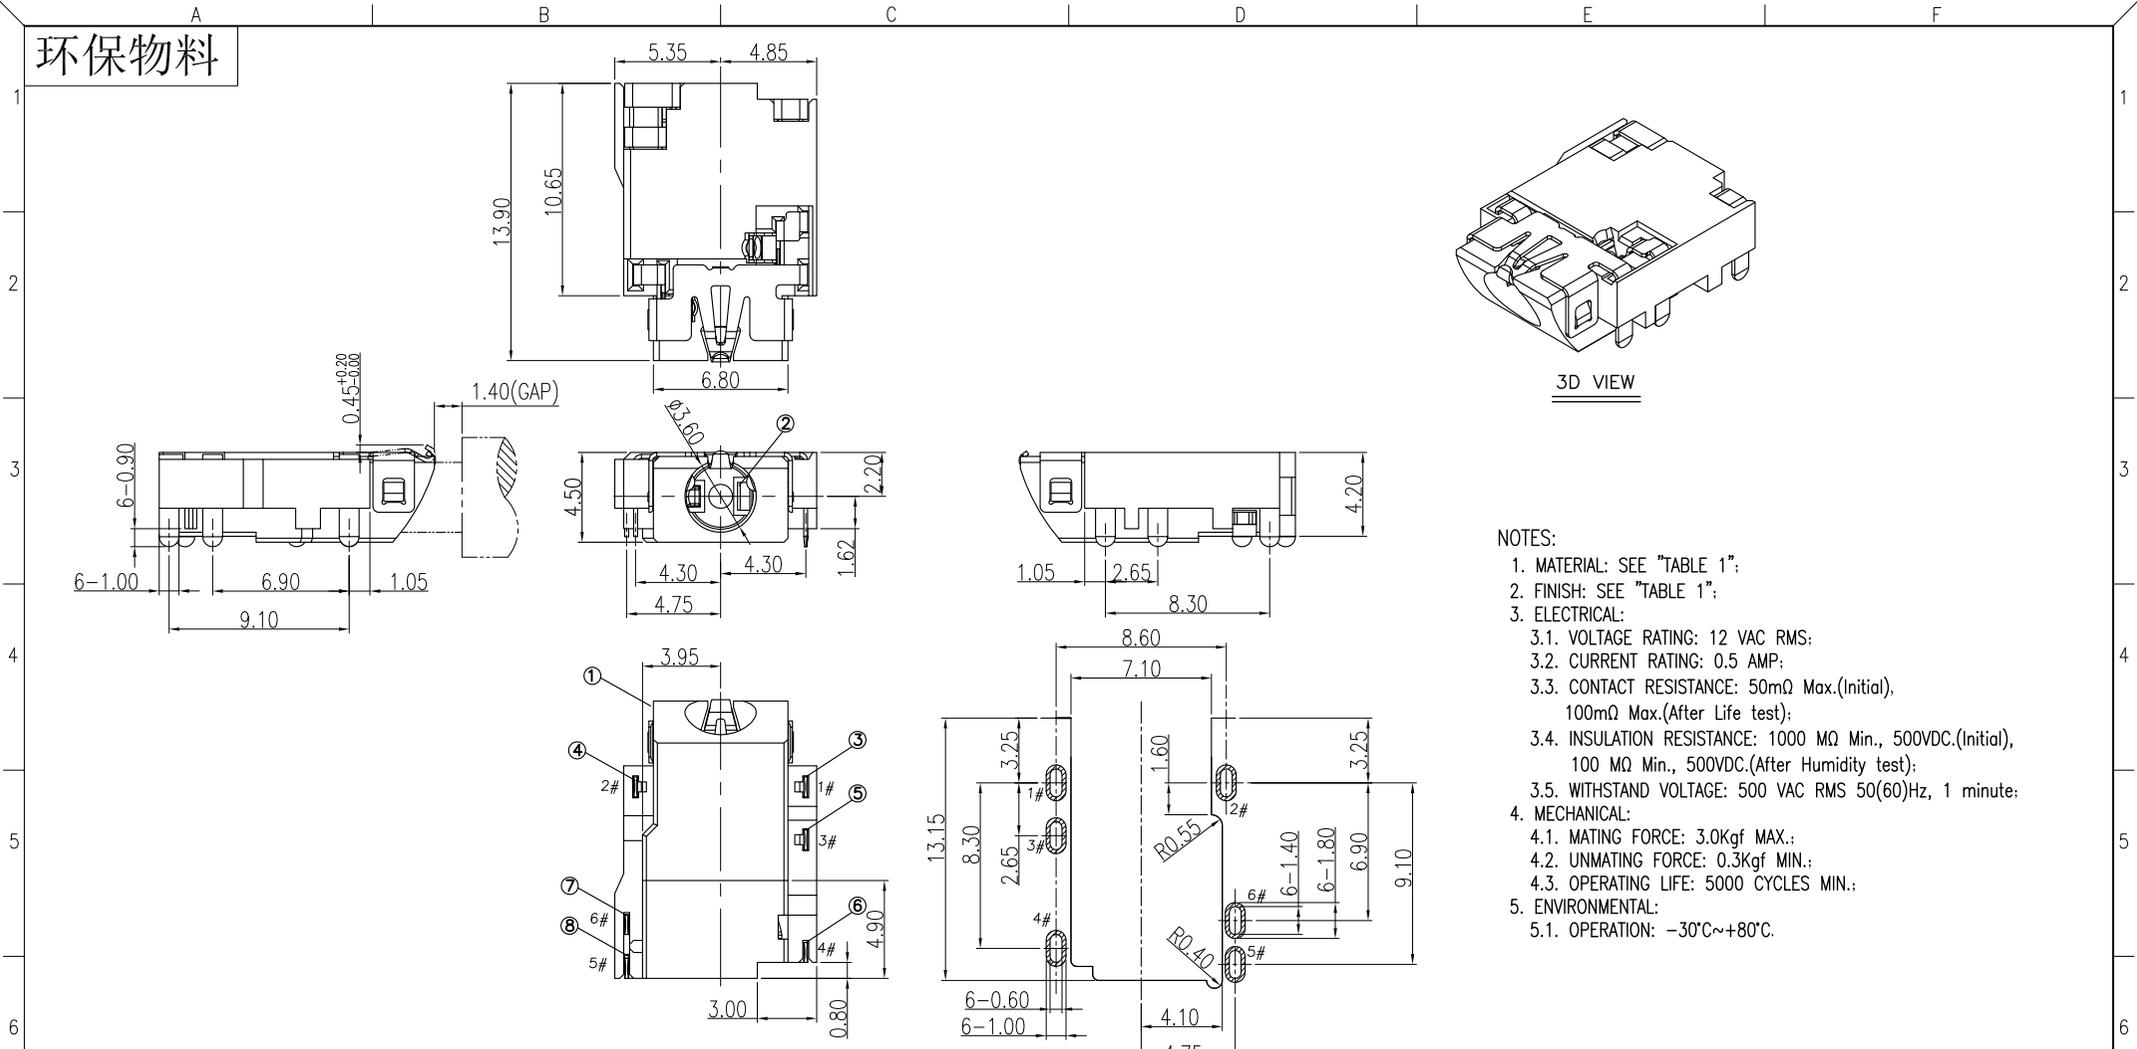

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
  - 3.1. VOLTAGE RATING: 12 VAC RMS;
  - 3.2. CURRENT RATING: 0.5 AMP;
  - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
  - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial), 100 MΩ Min., 500VDC.(After Humidity test);
  - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
  - 4.1. MATING FORCE: 3.0Kgf MAX.;
  - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
  - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
  - 5.1. OPERATION: -30°C~+80°C.

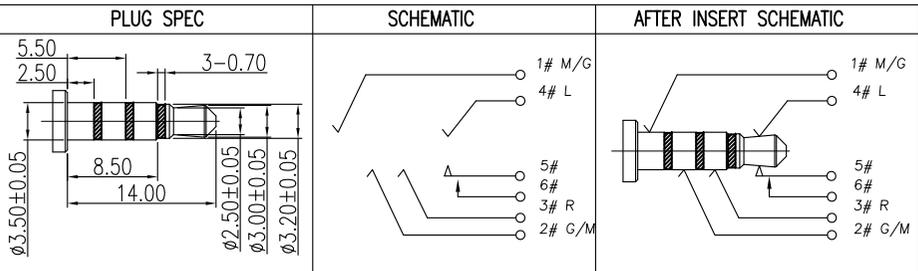





PCB HOLES(TOP VIEW) t=1.0mm  
NOTE:GENERAL TOLERANCE:±0.05mm

TABLE 1:


NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑧	Contact_5	⑤	1	Copper Alloy	T=0.20mm
⑦	Contact_6	⑥	1	Copper Alloy	T=0.20mm
⑥	Contact_4	④	1	Copper Alloy	T=0.20mm
⑤	Contact_3	③	1	Copper Alloy	T=0.20mm
④	Contact_2	②	1	Copper Alloy	T=0.20mm
③	Contact_1	①	1	Copper Alloy	T=0.20mm
②	Separator	1	HIGH TEMP	BLACK,UL94V-0	
①	Housing	1	HIGH TEMP	BLACK,UL94V-0	

A0			21.03.15		新图面发行		李兴泽		一般公差 GENERAL TOLERANCE		绘图 DR. 李兴泽		料号 PART NO. J0-3C16DR06L0-B001		文件编号 NUMBER ENDPT01		 TERMINAL&CONNECTORS					
A0			21.03.15		新图面发行		李兴泽		X.X ±0.30 X* ±2* X.XX ±0.20 X.X* ±1* X.XXX ±0.10 ▲ MAJOR DIM.		校对 CHK. 审核 APPD.		品名 TITLE ③.5mm Phone Jack CONN.						比例 SCALE 1/1		SHEET 1/1	


# 环保物料

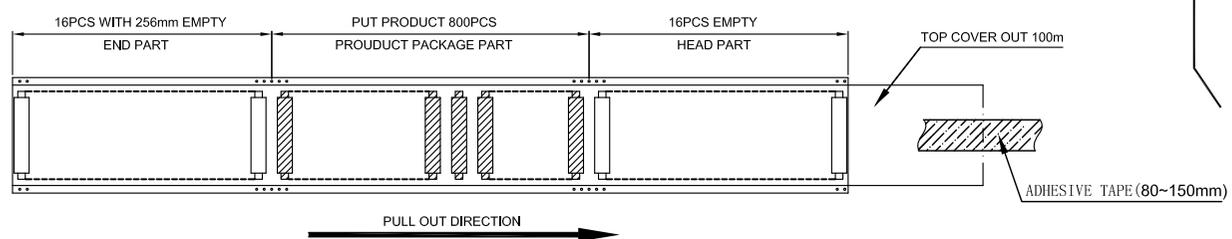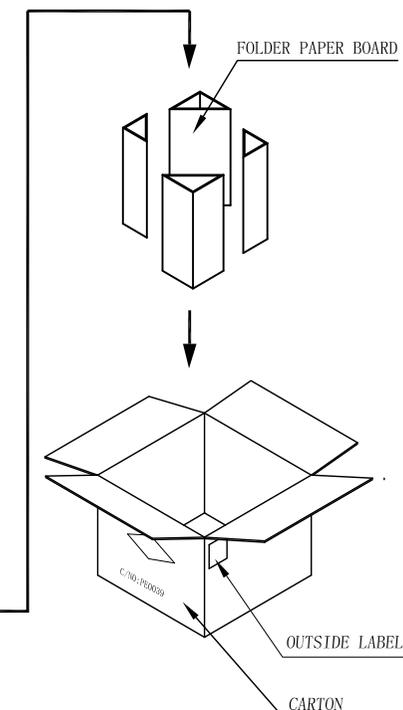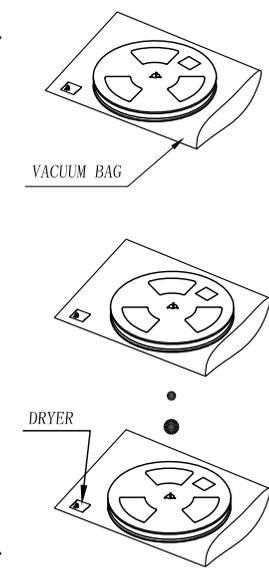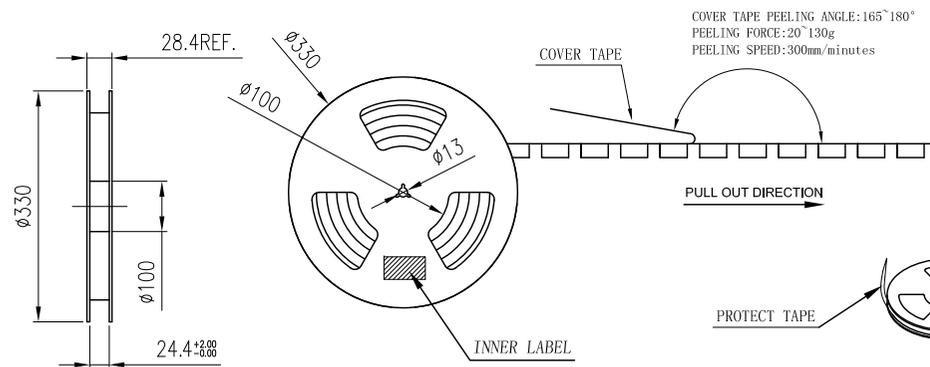

- NOTES:
- Material requirements:
    - The carton material requirements for the K=A, Dimension is 350\*340\*310mm;
    - Reel materials for PET; size reel for 330\*28.4.
  - Packaging requirements:
    - The tape into the packing machine, before the empty 16PCS, after the release of the product 800PCS, then the empty 16PCS with 256mm length of stay;
    - Top cover should out 100mm of the carrier tape. After winding, using adhesive tape(80-150mm) to stick the leader of cover tap on the side of the carrier tape;
    - Winding a protect tape arround the reel, then stick it by adhesive tape;
    - Label should paste in the designated area of the reel;
    - Put a dryer and a packed reel in the vacuum bag and make the vacuum process;
    - The tired folded 10 disks in the carton total 8000pcs;
    - Packed finished packing sealing, and in the outer carton label

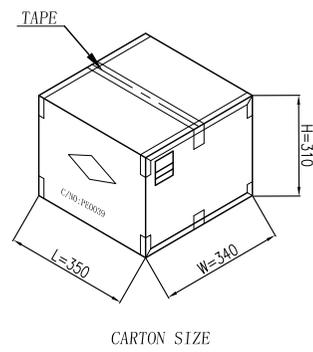

1 CARTON = 10 REEL = 8000 PRODUCT

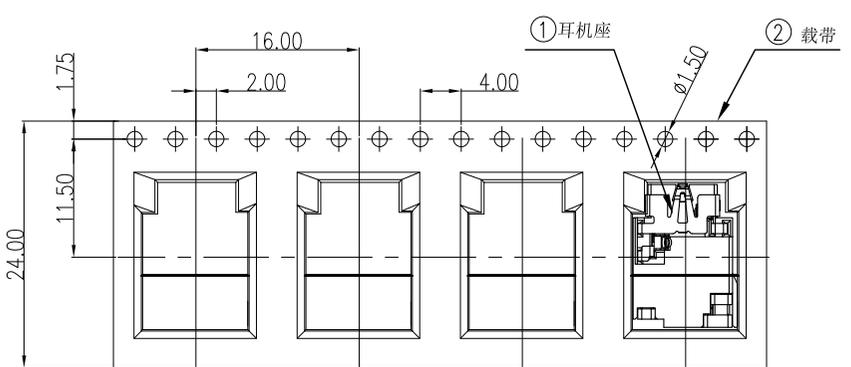

一般公差 GENERAL TOLERANCE		绘图 DR.	李兴泽
X.X ±0.30	X* ±2*	校对 CHK.	
X.XX ±0.20	X.X* ±1*	审核 CHK.	
X.XXX ±0.10	▲ MAJOR DIM.	核准 APPD.	
单位 UNIT	mm		

料号 PART NO.	文件编号 NUMBER
JO-3C16DR06L0-B001	ENDPT01
品名 TITLE	
Φ3.5mm Phone Jack CONN.	

<b>JGTC</b> ®		
TERMINAL&CONNECTORS		
比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0

A0	21. 03. 15	新图面发行	李兴泽		
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	