

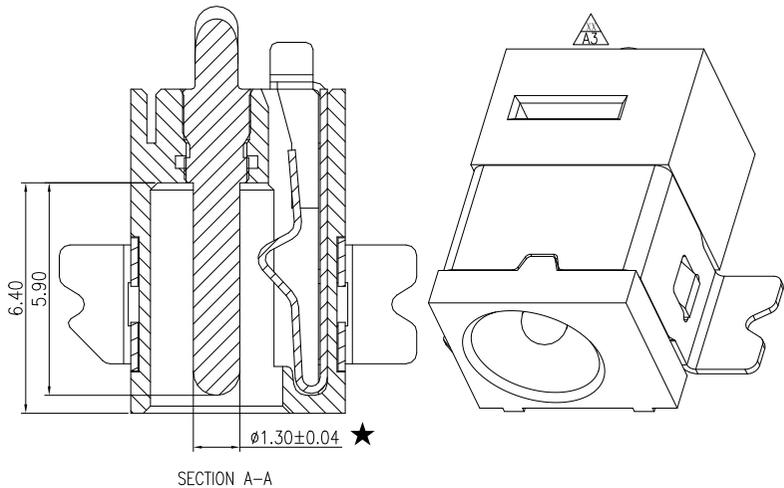
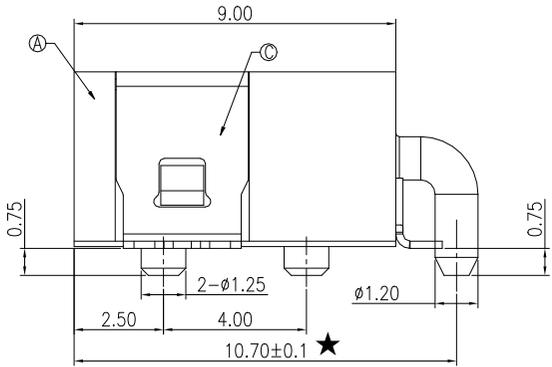
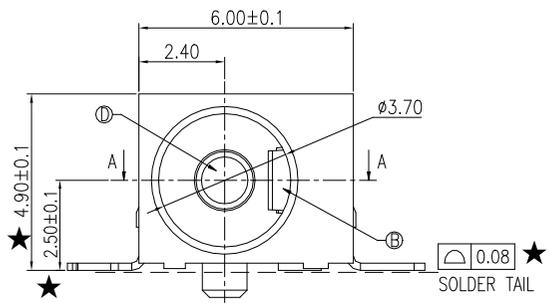

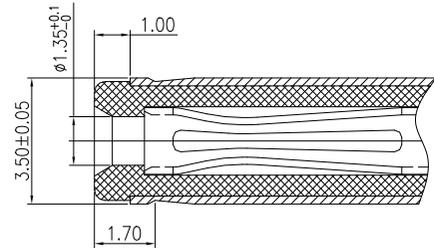


A

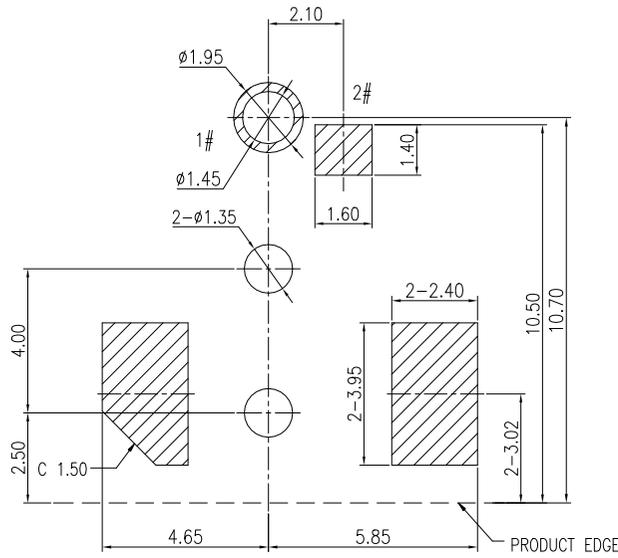

B

C

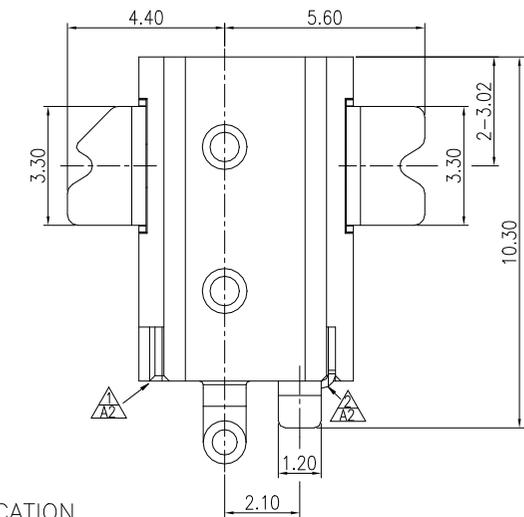

**SPECIFICATION**

1. Rating : DC 20V, 4A;
2. Contact resistance: 30mΩ MAX;
3. Insulation resistance: 100MΩ MIN.;
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 5-20N
6. life test: 5,000 cycles.
7. Salt spray test : 48H
8. Mark "★" as the key dimension

RECOMMENDED PCB LAYOUT  
TOP VIEW TOLERANCE:±0.05



D	PIN	1	HB i59	Au 0.8u"/Ni 40u"
C	CURVE PIECE	1	SUS 304	Ni 40u"
B	SPRING	1	C5191	Sn 80u"/Ni 40u"
A	HOUSING	1	PA46 BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

H

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE
A0	新图面发行	21.06.08	LINEAR	ANGLES	1:1	Daniel Dong	2023.06.15
A1	更新电镀规格	21.07.13			APPROVED		
A2	图面更新与实物一致	21.08.11	0.00±0.15	X° REF±6°	X° ±3°	Micky Ma	2023.06.15
A3	据实物更新图纸	23.06.15					
			0.00±0.08	X° X' ±2°		Xiao	2023.06.15

PART NO.		DWG NO.	
J0-3C25SR132-052E		ENDE05	
TITLE			
Φ3.50X1.35 弩式 DC POWER JACK			

<b>JCTC</b> ®			