

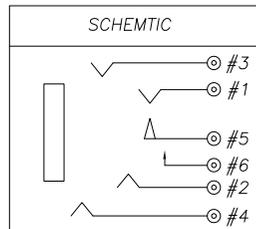
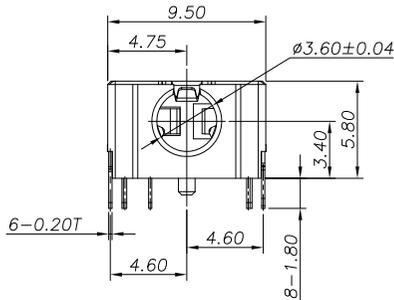




环保物料

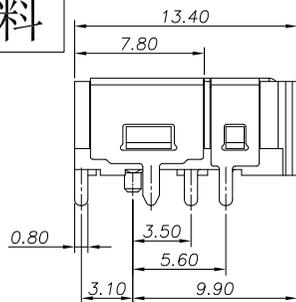

RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCE:±0.05

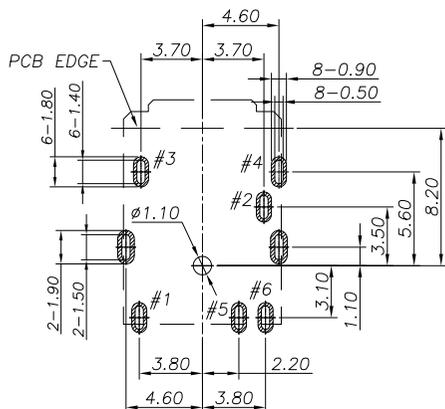

RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE:±0.05

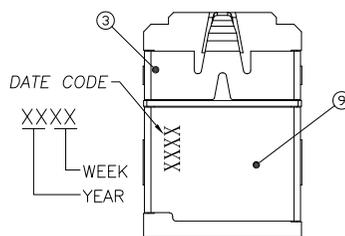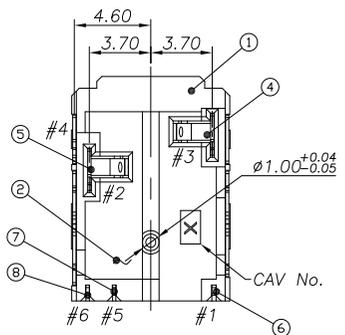

NOTE:

1.MATERIAL SPECIFICATION:

- 1-1.HOUSING:PA9T; UL94 V-0 BLACK.
- 1-2.SEPERATE:LCP; UL94 V-0 BLACK.
- 1-3.EARTH: C5191.
- 1-4.RING-B: C5191.
- 1-5.RING-A: C5191.
- 1-6.TIP SPRING: C5191.
- 1-7.TRANSFER TERMINAL: C5191.
- 1-8.MAKE TERMINAL: C5191.
- 1-9.SHELL: C2680.

2.PLATING SPECIFICATION:

- 2-1.EARTH&RING-A&RING-B&TIP SPRING:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
Au PLATING THICKNESS SEE P/N
100u" MIN TIN PLATED ON SOLDER AREA.

2-2.MAKE TERMINAL:

Ni 50u" MIN. UNDER PLATED OVER ALL.

2-3.TRANSFER TERMINAL:

Ni 50u" MIN. UNDER PLATED OVER ALL.

2-4.SHELL:

Ni 50u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE,

- 3-1.INSERTION FORCE: 0.3~3.0kgf
- 3-2.REMOVAL FORCE: 0.3~3.0kgf
- 3-3.DURABILITY: 5000 CYCLES.

4.ELECTRICAL PERFORMANCE,

- 4-1.CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
100mΩ MAX. (AFTER TEST)
- 4-2.INSULATION RESISTANCE: 100MΩ MIN (INITIAL)
- 4-3.DIELECTRIC WITHSTAND VOLTAGE: AC 500V FOR 1 MINUTE.

5.HF COMPLIANT.

6.IR REFLOW:


THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

7.OPERATING TEMPERATURE:-25°C TO 85°C


P/N.: J0-3 C34 D R 0 6 9 4-00 01

1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC
- 2.3:φ3.5mm
- 3.E34=板上中心高3.40mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.6:6PIN
- 8.9:9T
- 9.柱子/唛啦
- 10.TYPE 码 00: 流水码
- 11.Contact Area plating on contacts 01: G/F

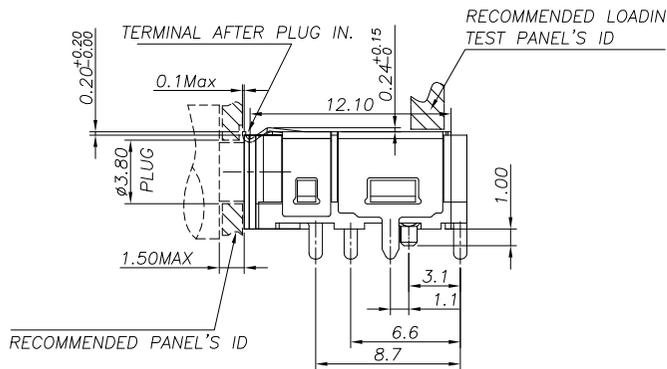


MALE AND FEMALE ASSEMBLY DRAWING

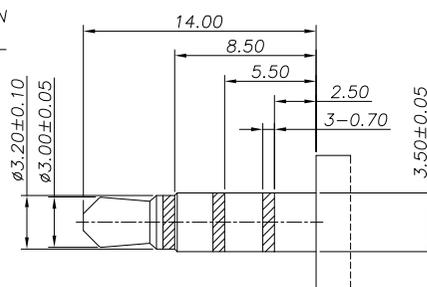

RECOMMENDED PLUG(±0.05)
φ3.5 4-POLE STANDARD PLUG

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
A0	新图面发行	22.04.22		LINEAR	ANGLES	APPROVED	Frey Yang	22.04.22	J0-3C34DR0694-0001	ENDE05			
			0.00±0.20	X° REF±6°	DESIGNER	Daniel Dong	22.04.22	TITLE					
			0.000±0.10	X° X'±2°	DRAWN	CGY	22.04.22	φ3.5 PHONE JACK					
			SIZE: A4							REV	A0	SHEET	1/1

环保物料

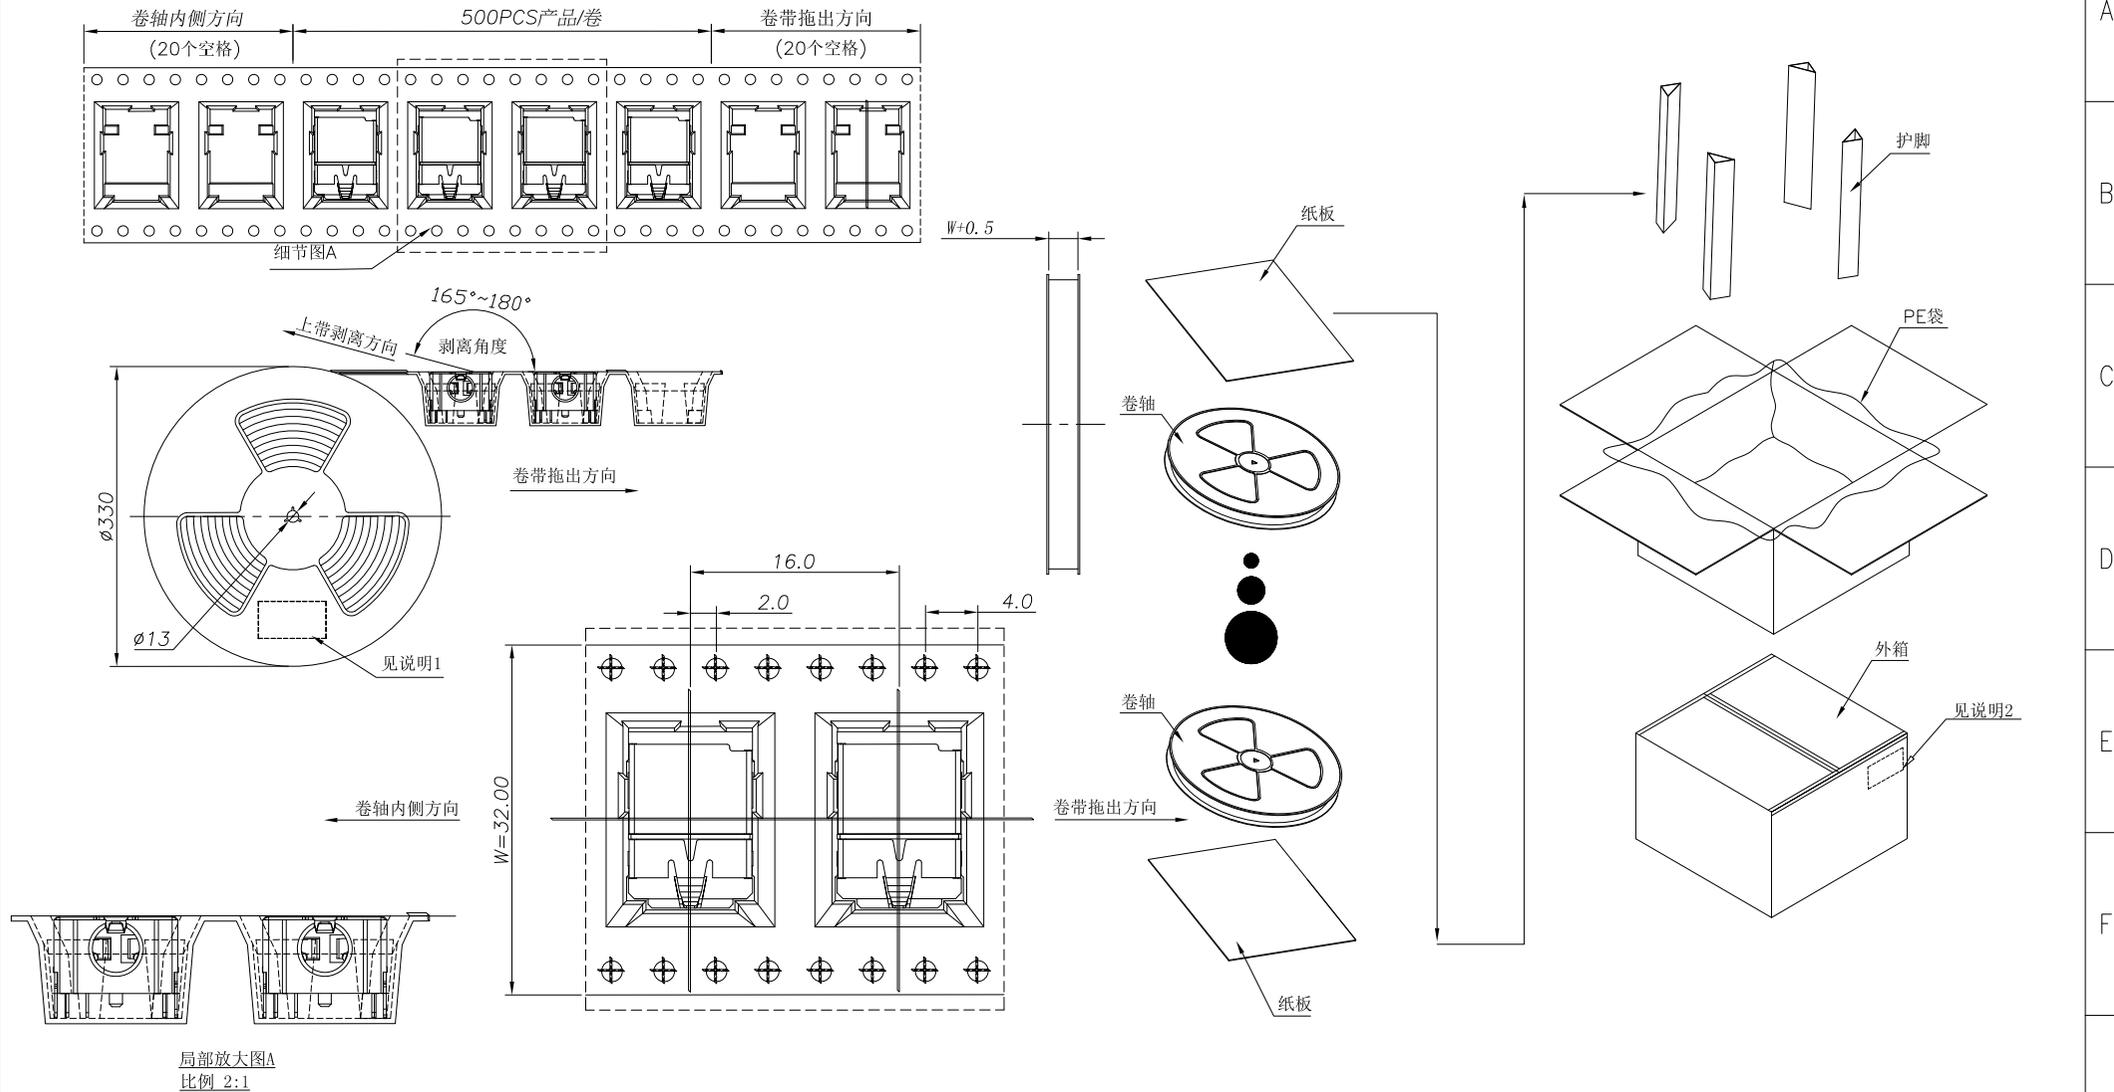

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.04.22		LINEAR	ANGLES	1:1	Frey Yang	22.04.22	J0-3C34DR0694-0001	ENDE05				
			0.0 ± 0.30	X° REF ± 6°	APPROVED	Daniel Dong	22.04.22	TITLE						
			UNIT: MM	0.00 ± 0.20	X° ± 3°	DESIGNER	CGY	22.04.22	Φ3.5 PHONE JACK					
			SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN					REV	A0	SHEET	1/1