


RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05

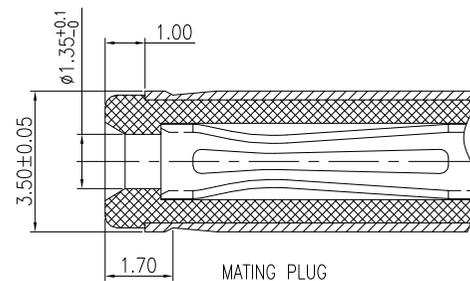


MATING PLUG

SECTION A-A

J0-3 E23 D R 0 2 4 2-00 01
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
- 2.3:ø3.5mm
- 3.E23=板上中心高2.3mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2:2PIN
- 8.4:46料
- 9.柱子/唛啦
- 2:带两个柱子无唛啦
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
- 01: G/F





NO.	DESCRIPTION	QTY	MATERIAL	PLATING
D	PIN	1	HBi59	Gold flash/Ni
C	CURVE PIECE	1	SUS 304	Ni
B	SPRING	1	C5191	Sn/Ni
A	HOUSING	1	PA46 BLACK	

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE
AO	新版发行	22.07.15	LINEAR	ANGLES	1:1	Daniel Dong	23.06.30
A1	换图框发行	23.06.30					
			0.0±0.25	X° REF±6°	APPROVED	Micky Ma	23.06.30
			0.00±0.15	X° ±3°	DESIGNER	Xiao	23.06.30
			0.000±0.08	X° X' ±2°	DRAWN		


PART NO.		DWG NO.	TITLE	
J0-3E23DR0242-0001	ENDE05			
TITLE			Φ3.50X1.35 卧式 DC POWER JACK	
REV	A1	SHEET	1/1	




拉出方向

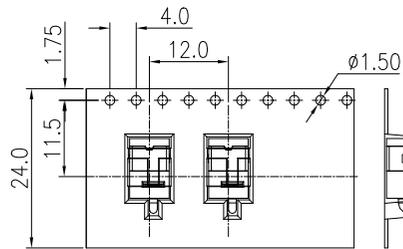


总共10层

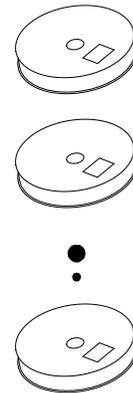


PE袋:



外箱,1PCS

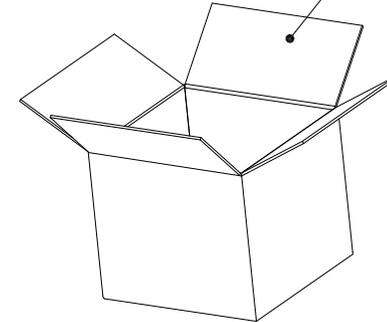

透明胶带

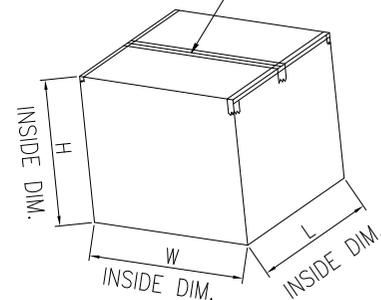


拉出方向

包装盘:外径 ϕ 330;内径 ϕ 100

覆盖带 350mm 最少.

拉出方向



备注:

1. 材料规格:
 - 1.1 载带:T=0.40mm
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=300
2. 包装数量:
 - 800PCS/卷, 10卷(8000PCS)/箱
3. 上盖带拔离力: 0.1N~0.7N(10~70gf);
 - 拔离角度: 165°~180°;
 - 拔离速度: 300mm/分钟.

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新版发行	22.07.15		LINEAR	1:1	Daniel Dong	23.06.30	JO-3E23DR0242-0001	ENDE05				
A1	换图框发行	23.06.30		ANGLES	APPROVED								
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	Micky Ma	23.06.30	TITLE				
			SIZE: A4	0.00±0.08	X° X' ±2°	DRAWN	Xiao	23.06.30	Φ3.50X1.35 卧式 DC POWER JACK				
										REV	A1	SHEET	1/1