

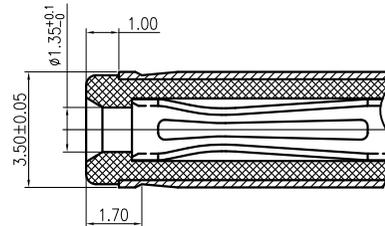
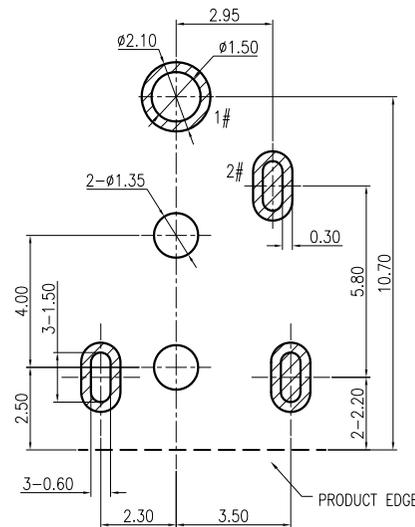


SECTION A-A

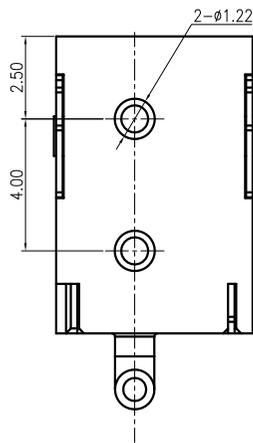

SPECIFICATION

- Rating : DC 12V, 3.0A;
- Contact resistance: 30mΩ MAX ;
- Insulation resistance : 100MΩ MIN. ;
- Withstand voltage : 500VAC ;
- Insertion and extraction force : 3-20N
- life test : 5,000 cycles °

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

JO-3 E23 D R 0 4 T 2-00 2E
1 2 3 4 5 6 7 8 9 10 11



- 1.JO:DC
- 2.3:φ3.5mm
- 3.E23=板上中心高2.3mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.4:4PIN
- 8.T:10T
- 9.柱子/唛啦 2:带两个柱子无唛啦
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
2E:Tin plating

D	PIN	1	HBI59	Gold flash/Ni
C	CURVE PIECE	1	SUS 304	Ni
B	SPRING	1	C5191	Sn/Ni
A	HOUSING	1	PA10T BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING


REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO:	DWG NO.	 TERMINAL&CONNECTORS			
AO	New drawing release	2020.11.02		LINEAR	ANGLES	1:1	Yang ZhangXiong	2020.11.02	JO-3E23DR04T2-002E	ENDE05				
			0.0±0.30	X° REF ±/°	APPROVED	Dongdongping	2020.11.02	TITLE:						
			0.00±0.20	X° ±2°	DESIGNER	Chenggongyin	2020.11.02	Φ3.50X1.35 卧式 DC POWER JACK						
			UNIT: MM	0.00±0.10	X° X' ±1°	DRAWN					REV	AO	SHEET	1/1

环保物料


拉出方向

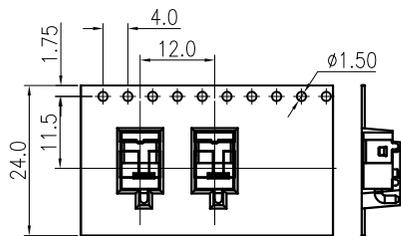


拉出方向

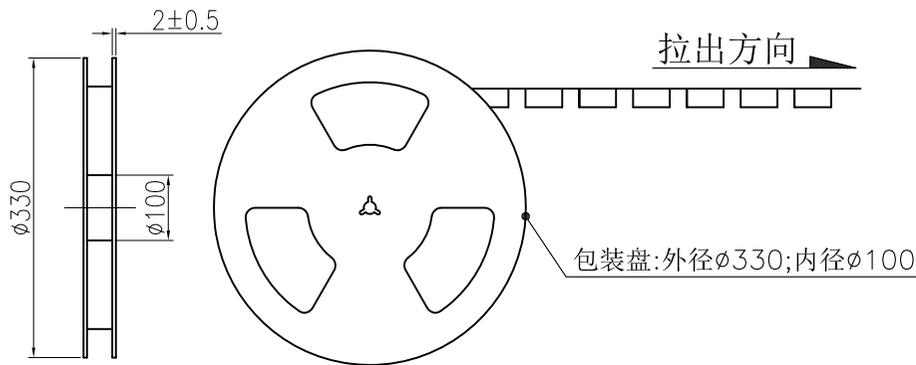


总共10层

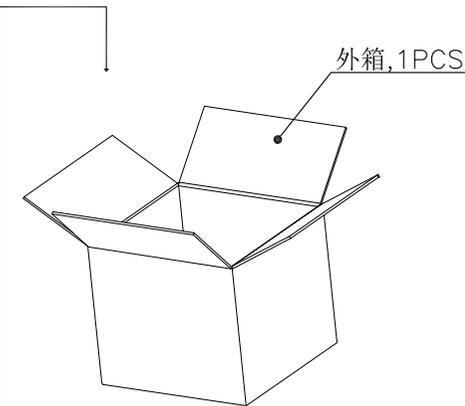

透明胶带

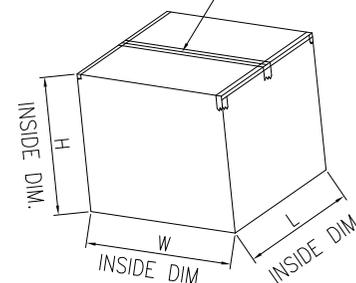

PE袋:



覆盖带 350mm 最少.



备注:

1. 材料规格:
 - 1.1 载带:T=0.40mm
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=335,W=335,H=300
2. 包装数量:

800PCS/卷, 10卷(8000PCS)/箱
3. 上盖带拔离力: 0.1N~0.7N(10~70gf);

拔离角度: 165°~180°;
拔离速度: 300mm/分钟.

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO:	DWG NO.	 TERMINAL&CONNECTORS			
AO	New drawing release	2020.11.02		LINEAR	ANGLES	1:1	Yang ZhangXiong	2020.11.02	JO-3E23DR04T2-002E	ENDE05				
			0.00±0.20	X° ±2°	DESIGNER	Dongdongping	2020.11.02	TITLE:						
			0.00±0.10	X° X' ±1°	DRAWN	Chenggongyin	2020.11.02	Φ3.50X1.35 卧式 DC POWER JACK						
			SIZE: A4								REV	AO	SHEET	1/1

1

2

3

4

5

6

7

8