





环保物料








DATE CODE
Y M DD LL
Line
Date
Month
Year

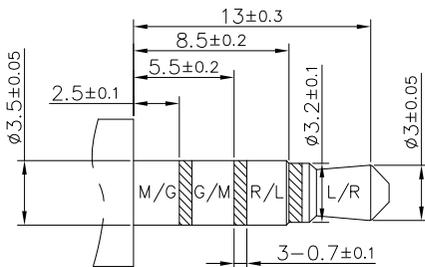

RECOMMENDED PLUG
φ3.5 4-POLE STANDARD PLUG

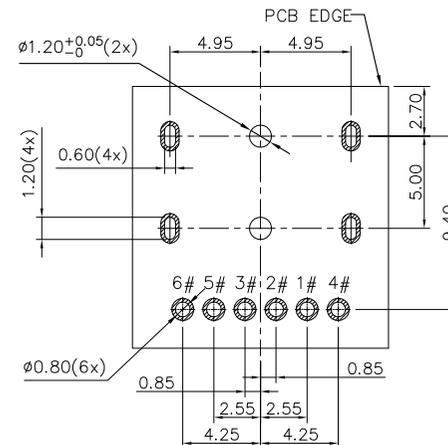

PCB HOLES(TOP VIEW) t=1.2mm
NOTE:GENERAL TOLERANCE:±0.05mm

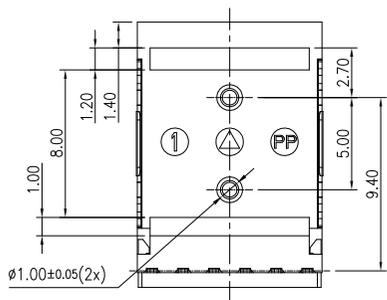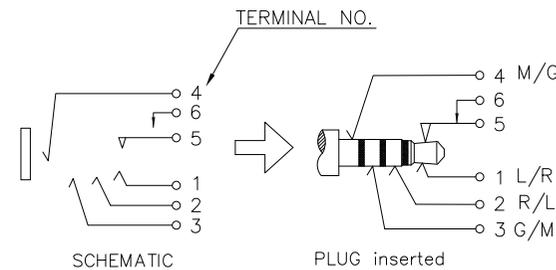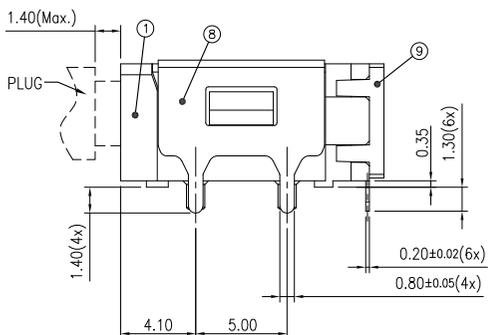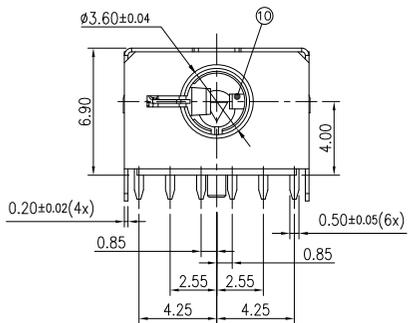

- Specification:
- Rating :DC 30V 0.5A.
 - Contact resistance: $\leq 30m\Omega$.
After life test: $\leq 50m\Omega$.
 - Insulation resistance: >math>100M\Omega</math> (500VDC).
After life test: >math>50M\Omega</math>.
 - Withstand voltage: 500VAC.
 - Insertion and extraction force: 3N-30N.
 - life test: 5000cycles min.
 - Operation temperature range: -20℃~70℃.
 - Preservative temperature range: -40℃~85℃.

- JO-3 E40 D R 0 6 T 2-00 01
1 2 3 4 5 6 7 8 9 10 11
- J0:DC
 - 3:φ3.5mm
 - E40=板上中心高4.0mm
 - D:DIP
 - R:90°
 - 0:带外壳
 - 6:6PIN
 - T:10T
 - 2:柱子/唛啦
 - 00:流水码
 - Contact Area plating on contacts
 - 01: G/F

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
10	SPACER	1	PA10T, UL94V-0	BLACK:HF
9	COVER	1	PA10T, UL94V-0	BLACK:HF
8	SHIELD	1	SUS 304 t=0.20	Ni 40u" MIN OVER ALL
7	TRANSFER	6	C5210 t=0.20	GOLD FLASH ON CONTACT AREA AND SOLID TAIL, Ni 40u" MIN OVER ALL
6	BREAK	5	C5210 t=0.20	
5	RING SPRING	2	C5210 t=0.20	
4	TIP SPRING	1	C5210 t=0.20	
3	MIC	3	C5210 t=0.20	
2	Earth spring	4	C5210 t=0.20	
1	Housing	1	PA10T, UL94V-0	BLACK:HF

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.04.22	LINEAR	1:1	Frey Yang	22.04.22	JO-3E40DR06T2-0001	ENDE05				
			ANGLES	APPROVED	Daniel Dong	22.04.22	TITLE					
			0.0 ± 0.30 X° REF ± 6°	DESIGNER	CGY	22.04.22	3.5φ 4Poles Audio Jack					
			0.00 ± 0.20 X° ± 2°	DRAWN					REV	A0	SHEET	1/1