
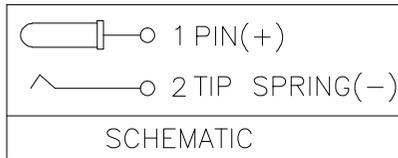


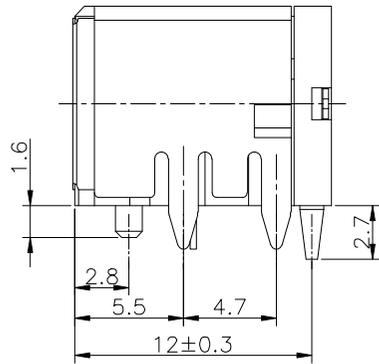


PCB MOUNTING HOLES
BOTTOM VIEW
(TOLERANCE:±0.05)

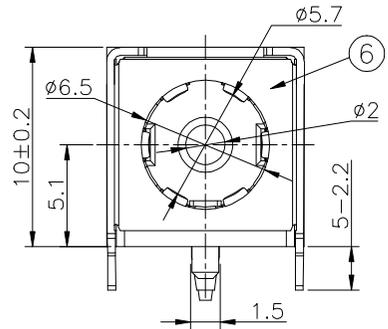

ELECTRICAL
VOLTAGE RATING:20V DC
CURRENT RATING:10A
CONTACT RESISTANCE:30mΩ MAX.
INSULATION RESISTANCE:100 MΩ MIN.
DIELECTRIC WITHSTAND VOLTAGE:500V AC (R.A.M)
TEMPERATURE RANGE:-25°C TO +85°C
MATERIALS & PLATING: SEE THE TABLE BELOW.
FOR IR REFLOW SOLDERING PROCESS,
TOP TEMPERATURE:260°C±5°C,10SEC

J0-3 E51 D R 0 2 9 4-A0 01
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
- 2.5:φ5.5mm
- 3.E51=板上中心高5.1mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2:2PIN
- 8.9:9T
- 9.柱子/喷啦 4:带一个柱子无喷啦
- 10.TYPE 码 A0:
- 11.Contact Area plating on contacts
01: G/F

ITEM	NAME	Q'TY	DESCRIPTION
6	GROUND	1	STAINLESS STEEL;
5	SHELL	1	IRON; NICKEL PLATING OVERALL
4	TERMINAL	1	STAINLESS STEEL;
3	PIN	1	BRASS; GOLD PLATING OVERALL
2	SORING	1	COPPER ALLOY; Cu PLAING
1	HOUSING	1	PA9T COLOR BLACK

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	21.04.22		LINEAR	1:1	APPROVED		J0-3E51DR0294-A001	ENDE05				
A1	换图框发行	23.10.10		ANGLES	X'REF±6'								
			UNIT: MM	0±0.50		DESIGNER		TITLE		REV	A1	SHEET	1/1
			SIZE: A4	0.0±0.30	X'±3'	DRAWN	Mlicky Ma	φ5.5 H10.0 卧式 DC POWER JACK					
				0.00±0.20	X'X'±2'								
				0.000±0.10									

1

2

3

4

5

6


7

8



1载带=250PCS
1外箱=250PCSX8盘载带=2000PCS



载带引出方向
* 载带包装时请依此引出方向为标准

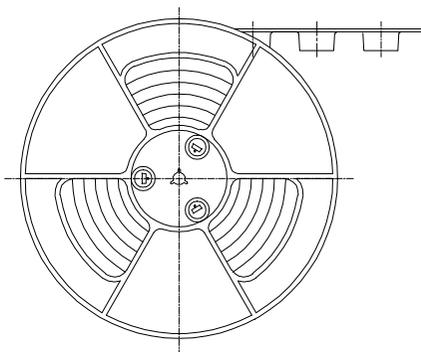

卷盘包装示意

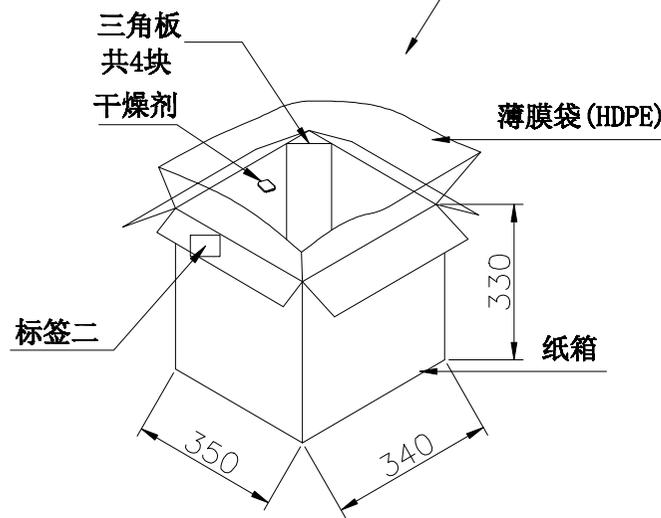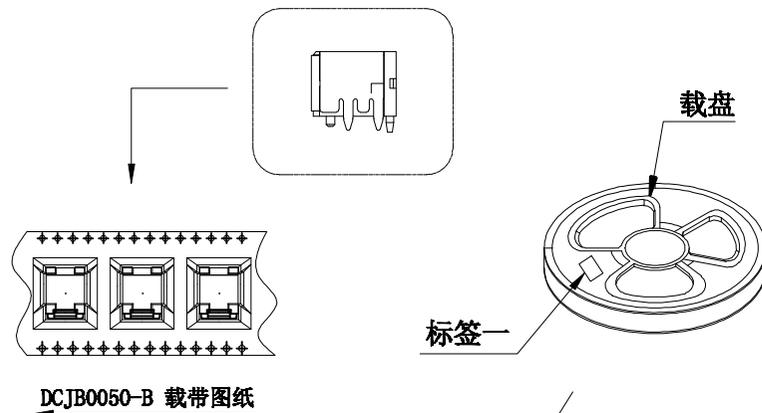

包材名称	材料及厚度(mm)	规格(mm)
载带	P.S(白色透明)T=0.50	5600X32.00X13.30
载盘	HI P.S(蓝色)	φ330X32
自粘带	PET(白色透明)	W=29.30 T=0.06
PE-375X450X0.06-A	PE(白色透明)	770X750X0.035
三角板	A=A+	260X300
ZK-400X400X330-A	K=K	350X340X330

备注:

1. 每载盘内必须放干燥剂;
2. 载盘必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 我司标准格式标签或标签按客户要求制作;

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.		
A0	新图面发行	21.04.22		LINEAR	ANGLES	APPROVED						
A1	换图框发行	23.10.10	0.00±0.30	X'REF±6'	DESIGNER							
			0.00±0.20	X'±3'	DRAWN	Mlicky Ma	23.10.10	J0-3E51DR0294-A001	ENDE05			
			SIZE: A4	0.000±0.10	X'X'±2'	TITLE			φ5.5 H10.0 卧式 DC POWER JACK			
									REV	A1	SHEET	1/1