
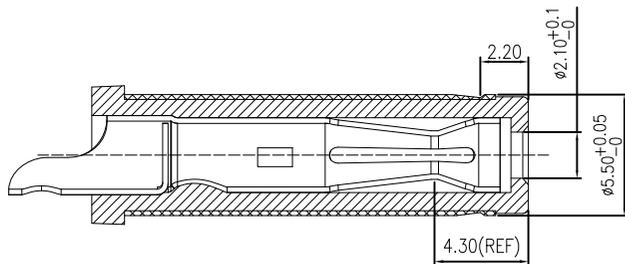
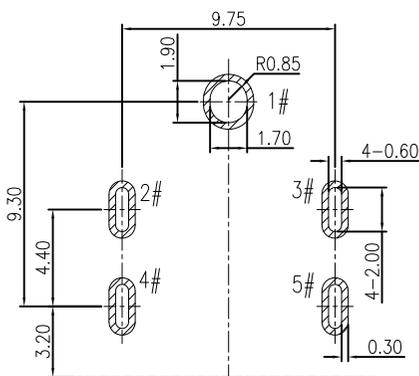
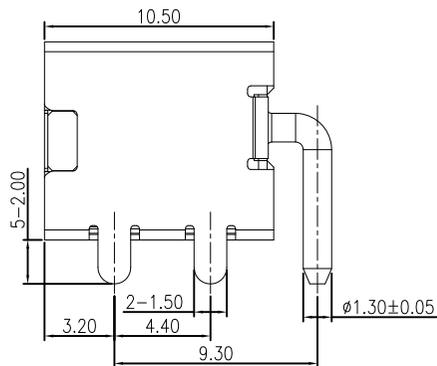
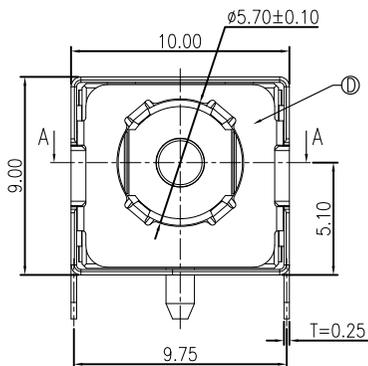
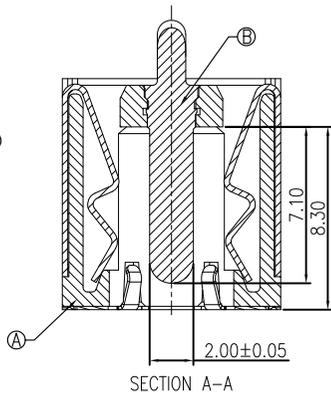
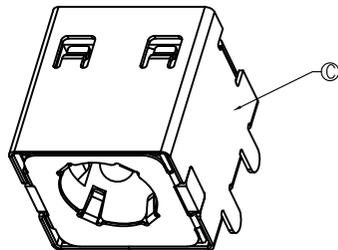


环保物料

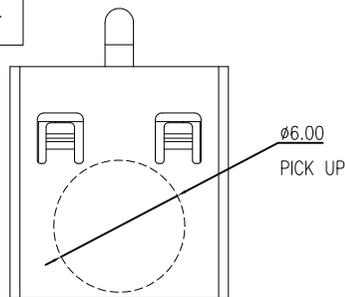


MATING PLUG  
DP550200-0129-60000H

SPECIFICATION:

1. RATING: DC 30V 12A
2. CONTACT RESISTANCE:  
30mΩ MAX(INITIAL).  
50mΩ MAX(FINAL).
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

J0-3 E51 D R 0 2 T 0-00 01  
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC
- 2.5:φ5.5mm
- 3.E51=板上中心高5.10mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2:2PIN
- 8.T:10T
- 9.柱子/唛啦
- 0:无柱无唛啦
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
- 01: G/F




no.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	GROUND	SUS 304		1
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1




REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC® TERMINAL&CONNECTORS							
A0	新图面发行	22.02.15	LINEAR	1:1	Frey Yang	22.02.15	J0-3E51DR02T0-0001	ENDE05	<table border="1"> <tr> <td>REV</td> <td>A0</td> <td>SHEET</td> <td>1/1</td> </tr> </table>				REV	A0	SHEET	1/1
REV	A0	SHEET	1/1													
			ANGLES	APPROVED	Daniel Dong	22.02.15	TITLE									
			0.0±0.30 X° REF±6°	DESIGNER	Micky Ma	22.02.15	Φ5.5 卧式 DC POWER JACK									
			0.00±0.25 X° ±3°	DRAWN												
			UNIT: MM													
			SIZE: A4													
			0.00±0.10 X° X'±2°													

环保物料

拉出方向

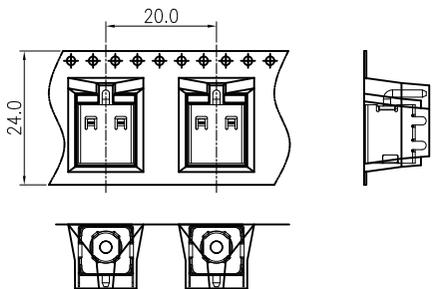

拉出方向

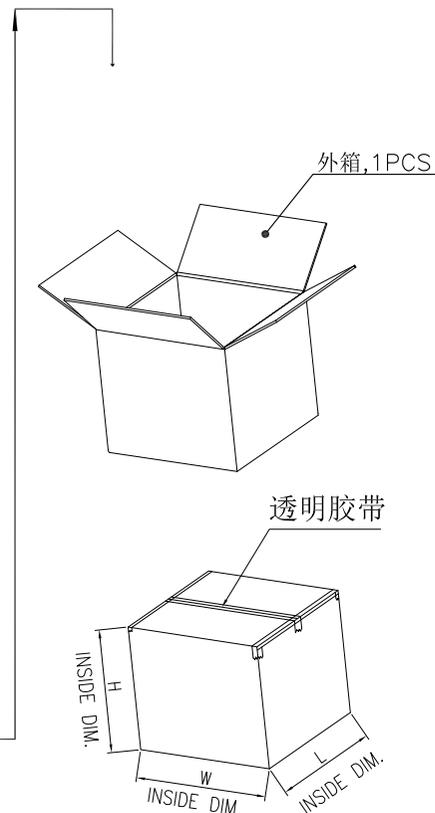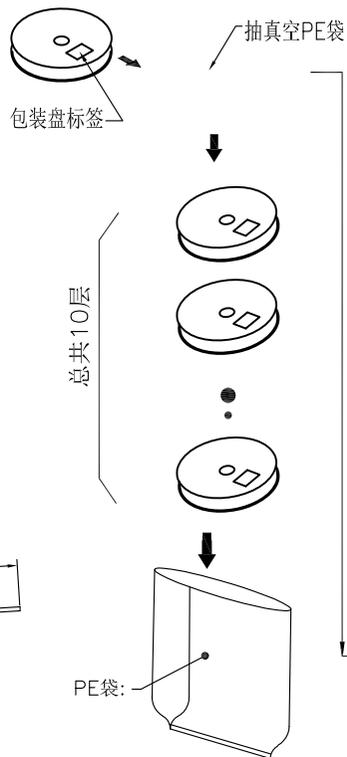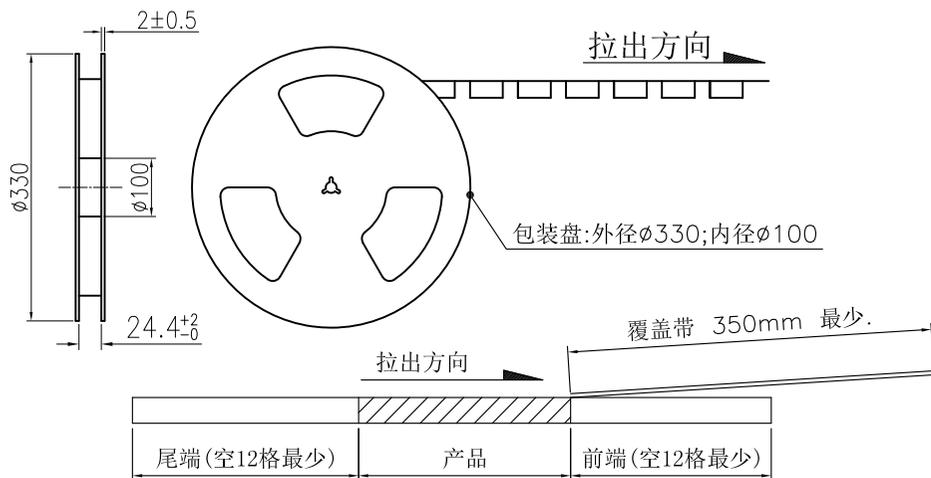

备注:

- 材料规格:
  - 1.1 载带: T=0.50mm
  - 1.2 包装盘: 蓝色
  - 1.3 纸箱: L=335, W=335, H=380
- 包装数量:
 

250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);  
 拔离角度: 165°~180°  
 拔离速度: 300mm/分钟.

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.02.15		LINEAR	ANGLES	1:1	Frey Yang	22.02.15	J0-3E51DR02T0-0001	ENDE05				
			0.0 ± 0.30	X° REF ± 6°	APPROVED	Daniel Dong	22.02.15	TITLE						
			0.00 ± 0.25	X° ± 3°	DESIGNER	Micky Ma	22.02.15	Φ5.5 卧式 DC POWER JACK						
			SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN					REV	A0	SHEET	1/1