

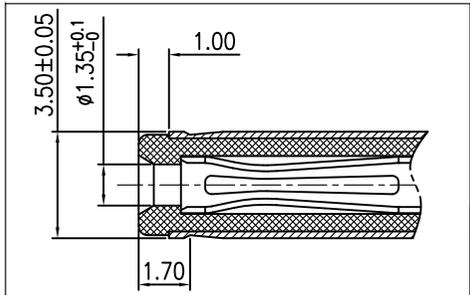


3D VIEW

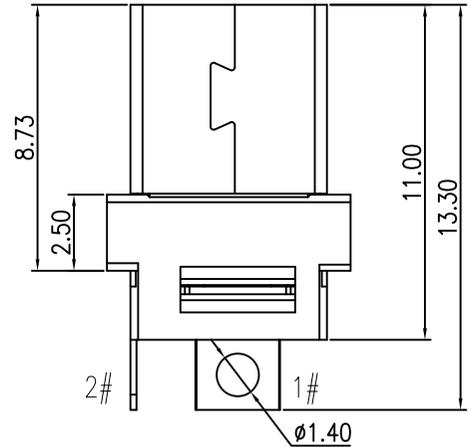

MATING PLUG
P/N.: DP350135-0120-60000H



SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3.0Kgf MAX.(INITIAL)
3.0Kgf MAX.(FINAL)
6. EXTRACTION FORCE: 0.5Kgf MIN.(INITIAL)
0.3Kgf MIN.(FINAL)
7. DURABILITY: 5,000 CYCLES

JO-3 G00 G V 0 2 T 0-00 2E
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC
- 2.3:ø3.5mm
- 3.G00:焊线式
- 4.G:焊线
- 5.V:180°
- 6.0:带外壳
- 7.2:2PIN
- 8.T:10T
- 9.柱子/唛啦
- 0:无柱无唛啦
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
2E: Tin plating

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	STOPPER	SUS 304		1
C	CENTER PIN	C3602	Sn100u"/Ni 50u"	1
B	SHELL	C5210	Ni 50u"	1
A	HOUSING	PA10T	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
X0	The new version file were released	2021.11.16	LINEAR	1:1	YZX	2021.11.16	JO-3G00GV02T0-002E	ENDE05				
			0.0±0.30	ANGLES	DESIGNER	DDP	TITLE		φ3.5X1.35焊线式 DC POWER JACK			
			0.00±0.20	X° REF±6°	DRAWN	Micky Ma						
			0.00±0.10	X° ±3°					REV	AO	SHEET	1/1
			X° X'±2°									