
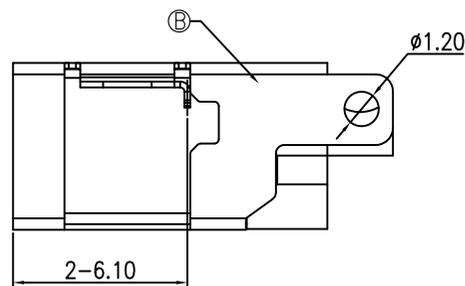
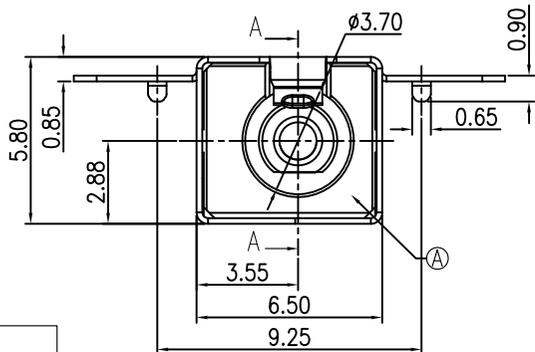
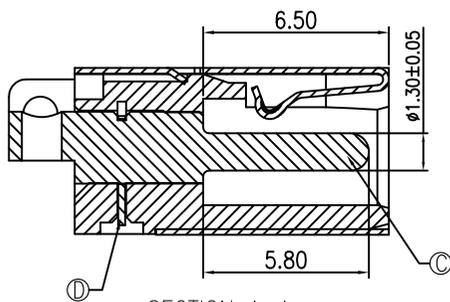
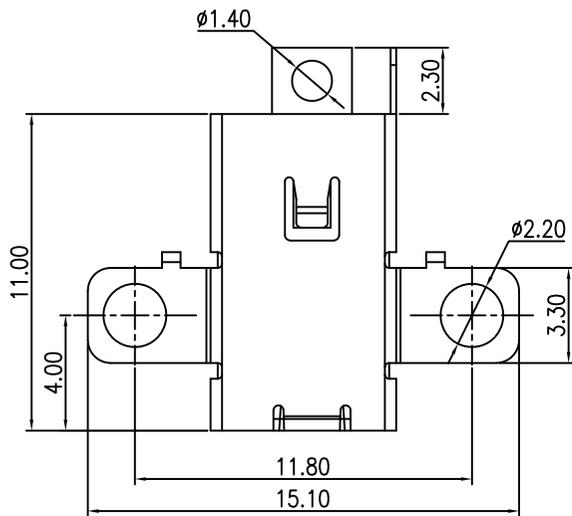


环保物料

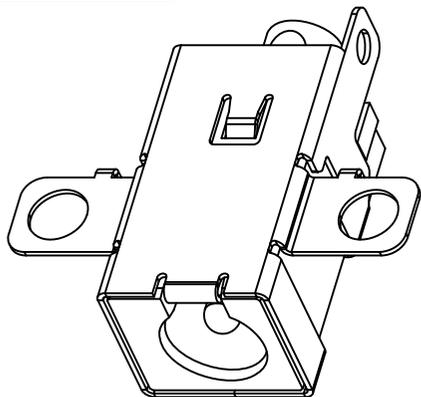

SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 40N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

J0-3 G00 G V 0 2 T 0-01 01
1 2 3 4 5 6 7 8 9 10 11

1.J0:DC

2.3:∅3.5mm

3.G00:焊线

4.G:焊线式

5.V:180°

6.0:带外壳

7.2:2PIN

8.T:10T


9.柱子/唛啦

0:无柱无唛啦

10.TYPE 码 01:外壳带孔



11.Contact Area plating on contacts

01: G/F

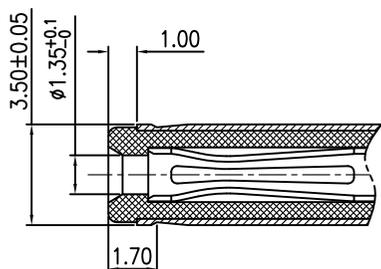

MATING PLUG
P/N.: DP350135-0120-60000H

SCHMATIC



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	STOPPER	SUS 304		1
C	CENTER PIN	C3602	GOLD FLASH/Ni 50u"	1
B	SHELL	C5210	Ni 50u"	1
A	HOUSING	PA10T	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS
AO	The new version file were released	2021.11.17	LINEAR	1:1	YZX	2021.11.17	J0-3G00GV02T0-0101	ENDE05	
			0.0±0.30	APPROVED	DDP	2021.11.17	TITLE		
			0.00±0.20	DESIGNER	Micky Ma	2021.11.17	Φ3.5 DC POWER JACK		
			0.000±0.10	DRAWN					REV
									AO
									SHEET
									1/1

1

2

3


4

5


6

7



8



DC JACK

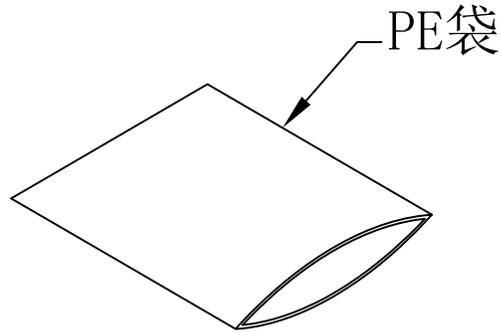

1000PCS/袋

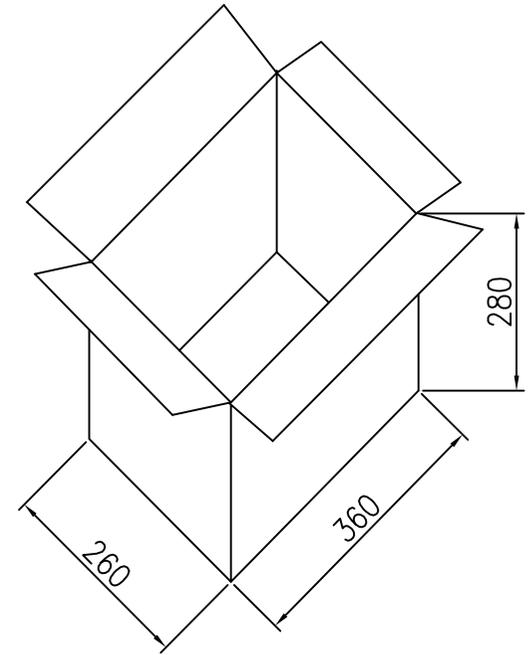

10000PCS/10袋/箱

备注:

1. 材料规格:
纸箱: L=360,W=260,H=280
2. 包装数量:
1000PCS/袋, 10000PCS/箱

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS				
AO	The new version file were released	2021.11.17		LINEAR	ANGLES	APPROVED	YZX	2021.11.17	J0-3G00GV02T0-0101	ENDE05					
			UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	DDP	2021.11.17	TITLE Φ3.5 DC POWER JACK			REV	AO	SHEET	1/1
			SIZE: A4	0.00±0.08	X° X' ±2°	DRAWN	Micky Ma	2021.11.17							