

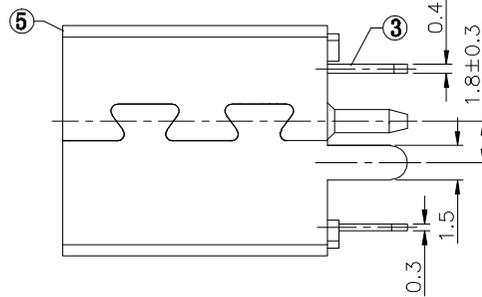
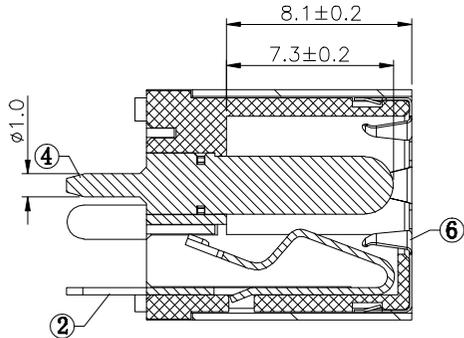

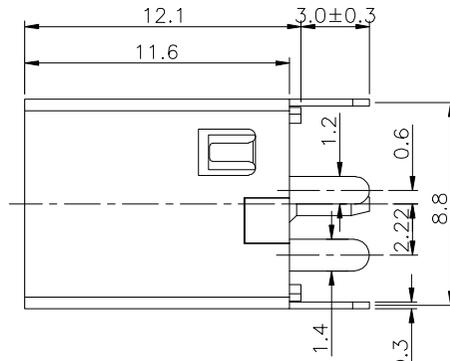
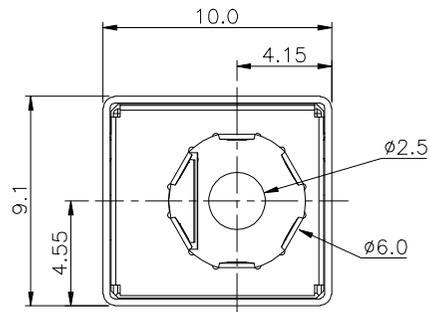


环保物料

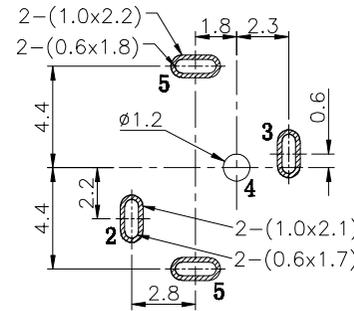

SCHEMATIC




**P. C. B LAYOUT
TOP VIEW**


- SPECIFICATION**
- Rating : DC 20V 5.5A;
 - Contact resistance: $\leq 0.03 \Omega$;
 - Insulation resistance: $\geq 100M \Omega$ (DC250V);
 - Withstand voltage: 500VAC ;
 - Insertion and extraction force: 3-30N;
 - life test: 5,000 cycles.

J0-3 H12 D V 0 3 9 0-00 21
1 2 3 4 5 6 7 8 9 10 11

- J0:DC JACK
- 2.5: $\phi 5.5\text{mm}$
- H12=直立式, 板上高度 12.10mm
- D:DIP
- V:180°
- 6.0:带外壳
- 7.3:3PIN
- 8.9:PA9T
- 9.柱子/唛啦 0:无柱无唛啦
- 10.TYPE 码 00:
- Contact Area plating on contacts
21:Silver plating

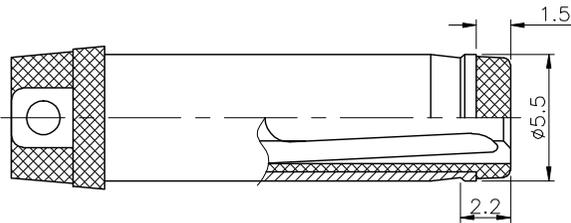

RECOMMENDED PLUG



6	COAT	1	SUS301	N/A
5	SHELL	1	SPCC	Ni-Plating
4	PIN	1	ZINC ALLOY	Ni-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	SPRING PIECE	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
				LINEAR	ANGLES	1:1								
A0	新图面发行	21.10.14		0.0±0.30	X° REF±6°	APPROVED	Frey Yang	23.03.29	J0-3H12DV0390-0021	ENDE05				
A1	换图框发行	23.03.29		0.00±0.20	X° ±3°	DESIGNER	Daniel Dong	23.03.29						
				0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	23.03.29						
TITLE 5.5立式 H=12.1 DC POWER JACK										REV	A1	SHEET	1/1	

1

2

3

4


5

6


7

8



环保物料




单重: 2.5g

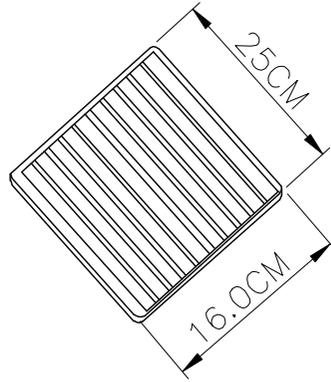

吸塑盒: 140 PCS/盘

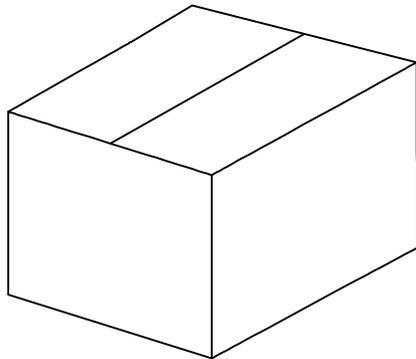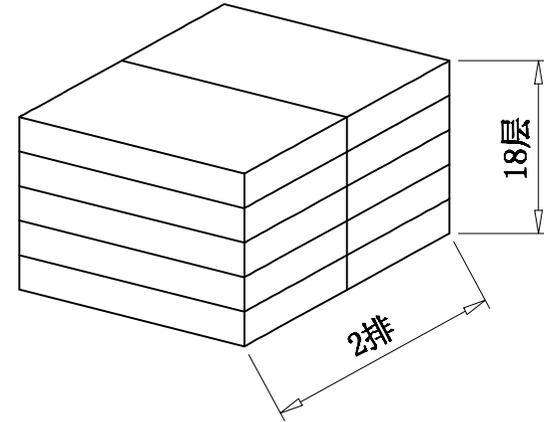

纸箱尺寸: 34*28*20.5 cm
 数量: 5040 PCS
 净重: 12.6 KG
 毛重: 14.7 KG

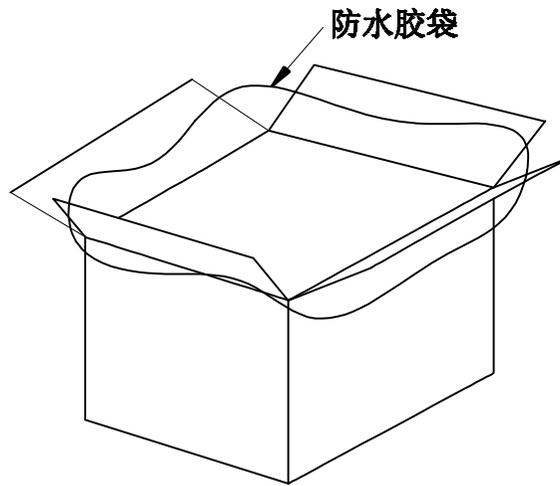

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS	
A0	新图面发行	21.10.14		LINEAR	ANGLES	APPROVED	Frey Yang	23.03.29	J0-3H12DV0390-0021	ENDE05		
A1	换图框发行	23.03.29	UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER	Daniel Dong	23.03.29	TITLE			
			SIZE: A4	0.000±0.10	X° X' ±2°	DRAWN	Micky Ma	23.03.29	Φ5.5立式 H=12.1 DC POWER JACK			
									REV	A1	SHEET	1/1

1

2

3

4

5

6

7

8