
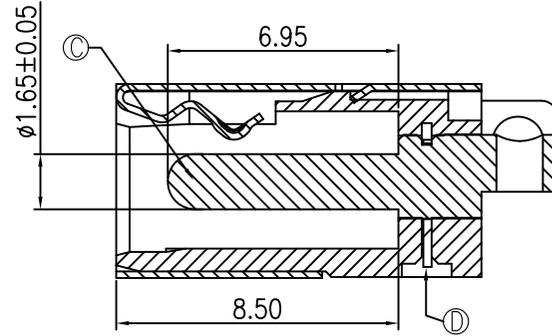
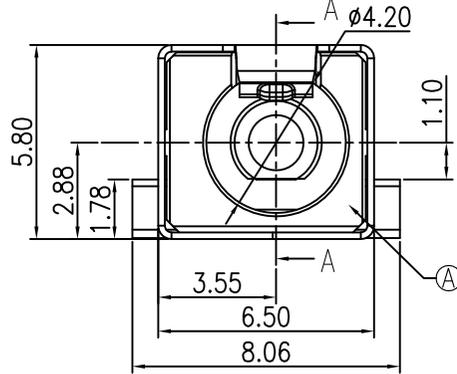



环保物料

检验规范


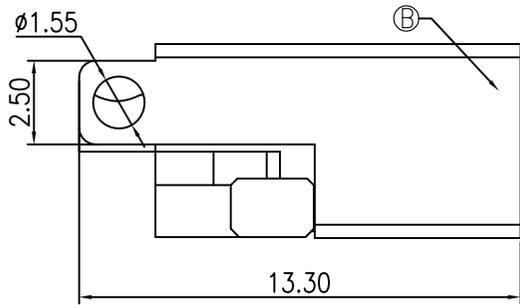


J0-4 C00 D V 0 2 T 0-00 2E
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC
- 2.4:ø4.0mm
- 3.C00=沉板0.0mm
- 4.D:DIP
- 5.V:180°
- 6.0:带外壳
- 7.2:2PIN
- 8.T:PA10T
- 9.0:无柱无唛啦
- 10.TYPE 码 00:
- 11.Contact Area plating on contacts
2E: Sn100u"/Ni 50u"

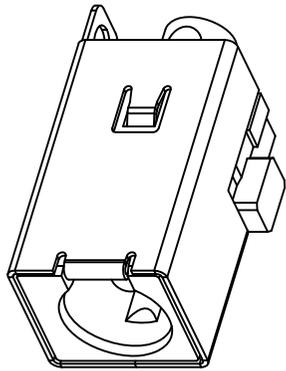

3D VIEW

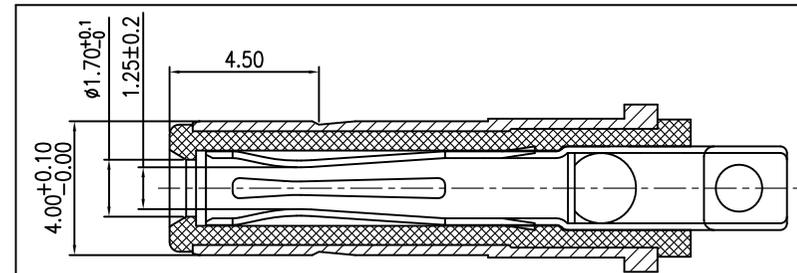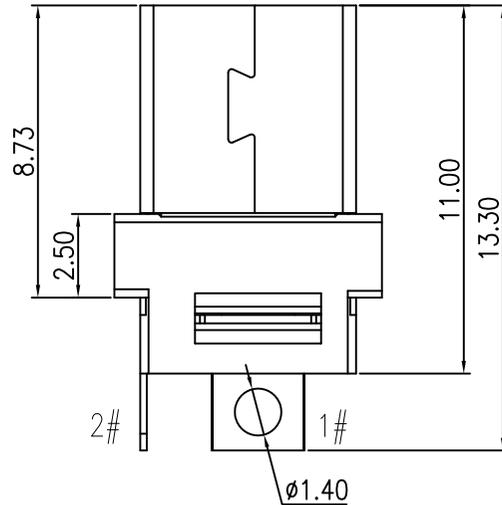

MATING PLUG

SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 2.0Kgf MAX.(INITIAL)
2.0Kgf MAX.(FINAL)
6. EXTRACTION FORCE: 1Kgf~3.0Kgf(INITIAL)
0.7Kgf~3.0Kgf(FINAL)
7. DURABILITY: 10,000 CYCLES

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	STOPPER	SUS		1
C	CENTER PIN	BRASS	Sn100u"/Ni 50u"	1
B	SHELL	C5210	Ni 50u"	1
A	HOUSING	PA10T	BLACK	1

一般公差 GENERAL TOLERANCE

X.X	±0.25	X'	±3'
X.XX	±0.20	X.X'	±2'
X.XXX	±0.10	▲ MAJOR DIM.	

绘图 DR. 程功银
校对 CHK. 马仟
审核 CHK. 董东平
核准 APPD. 杨章雄

料号 PART NO.

J0-4C00DV02T0-002E

文件编号 NUMBER

ENDPW03


品名 TITLE

Φ4.00X1.70焊线式DC POWER JACK


JCTC[®]
TERMINAL&CONNECTORS

比例 SCALE	SHEET	版次 REV.
1/1	1/1	A0


单位 UNIT mm



版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.
A0	21.07.29	新版图面发行	董东平	杨章雄




DC JACK

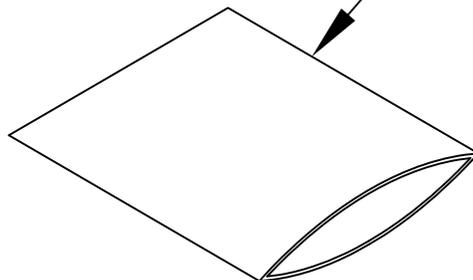

PE袋

1000PCS/袋

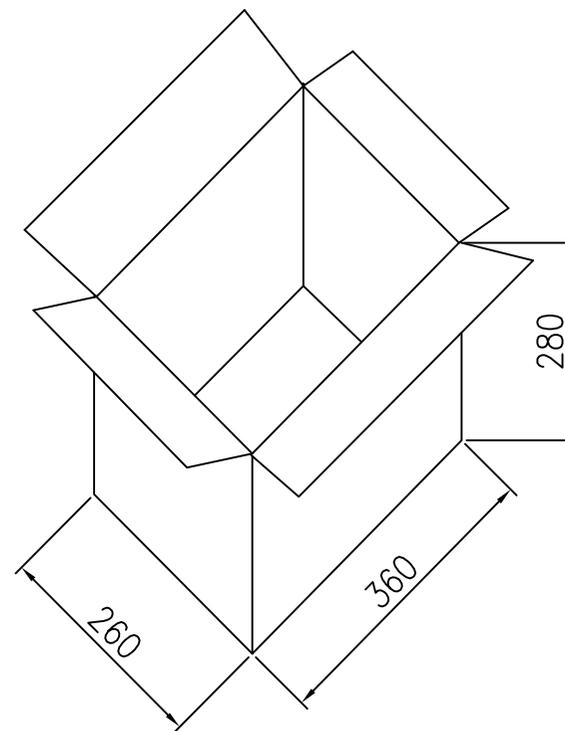

10000PCS/10袋/箱

备注:

- 1. 材料规格:
纸箱: L=360,W=260,H=280
- 2. 包装数量:
1000PCS/袋, 10000PCS/箱

			一般公差 GENERAL TOLERANCE		绘图 DR.	料号 PART NO.	文件编号 NUMBER	 TERMINAL&CONNECTORS			
			X.X ±0.25	X' ±3'	校对 CHK.	J0-4C00DV02T0-002E	ENDPW03				
			X.XX ±0.20	X.X' ±2'	审核	品名 TITLE			比例 SCALE	SHEET	版次 REV.
A0	21.08.03	新版图面发行	董东平	杨章雄	核准 APPD.	DC POWER JACK 包装图			1/1	1/1	A0
版次 REV.	日期 DATE	变更内容 DESCRIPTION	审核 CHK.	核准 APPD.	单位 UNIT						
				mm	