


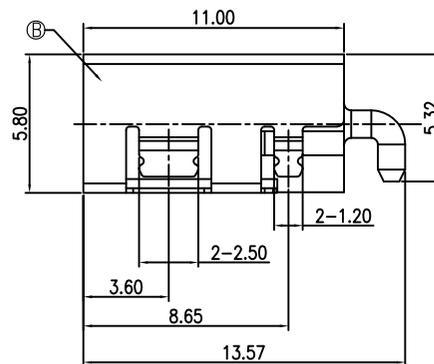
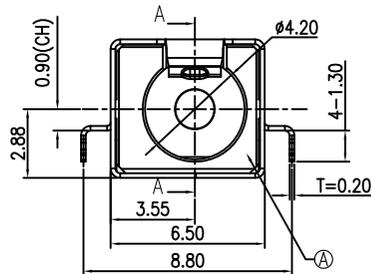
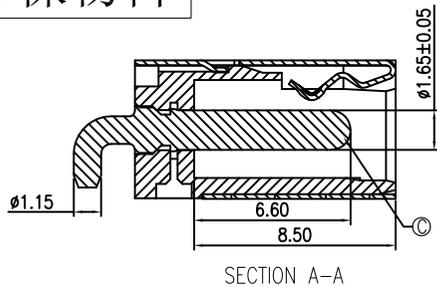


环保物料

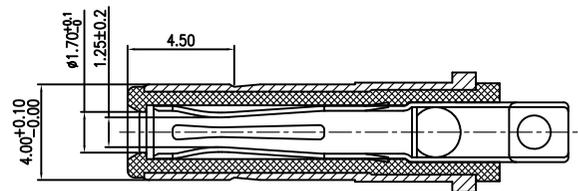


SPECIFICATION:


1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES



MATING PLUG

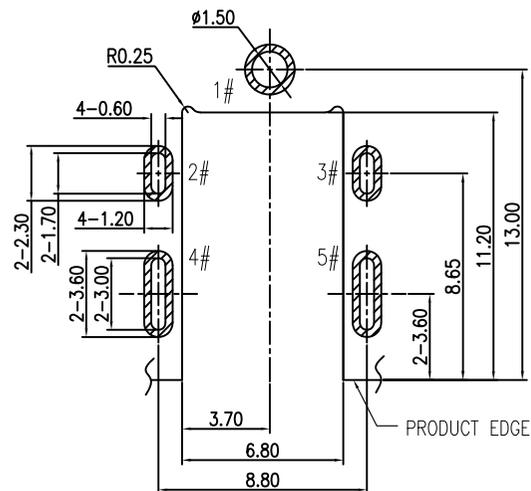

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05



J0-4 C09 D R 0 2 T 0-00 01
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
 - 2.4:∅4.0mm
 - 3.C09=沉板0.9mm
 - 4.D:DIP
 - 5.R:90°
 - 6.0:带外壳
 - 7.2:2PIN
 - 8.T:PA10T
 - 9.0:无柱无唛啦
 - 10.TYPE 码 00:
 - 11.Contact Area plating on contacts
- 01: G/F

C	CENTER PIN	H65	GOLD FLASH"/Ni 40u"	1
B	SHELL	C5210	Ni 40u"	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS			
A0	新图面发行	22.04.22	LINEAR	ANGLES	1:1	Frey Yang	22.09.17	J0-4C09DR02T0-0001	ENDE05				
A1	更换图框发行	22.09.17	0.0±0.30	X° REF±6°	APPROVED	Daniel Dong	22.09.17	TITLE					
			0.00±0.25	X° ±3°	DESIGNER	CHX	22.09.17	∅4.0沉板式(CH=0.90) DC POWER JACK					
			UNIT: MM	0.00±0.10	X° X'±2°	DRAWN				REV	A1	SHEET	1/1