

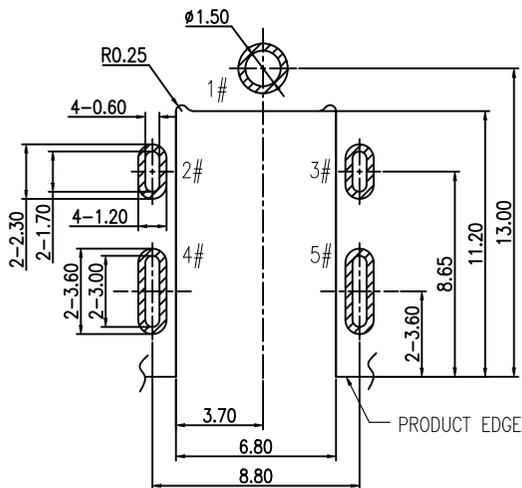


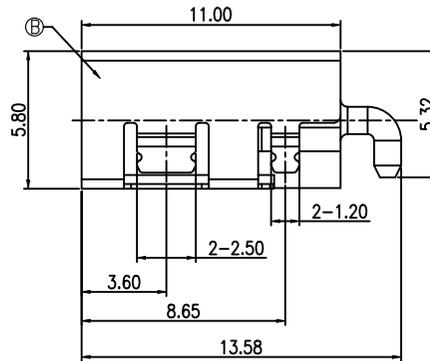
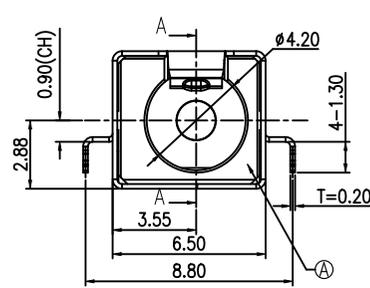


环保物料 HF

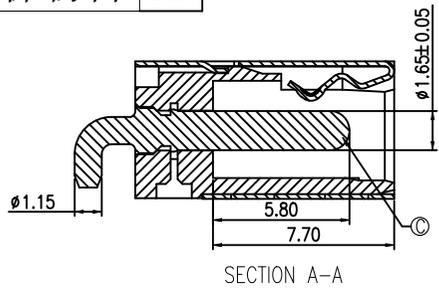

RECOMMENDED PCB LAYOUT(t=1.00)
TOP VIEW TOLERANCE:±0.05



SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

J0-4 C09 D R 0 2 T 0-01 01
1 2 3 4 5 6 7 8 9 10 11

- 1.J0:DC JACK
- 2.4:∅4.0mm
- 3.C09=沉板0.9mm
- 4.D:DIP
- 5.R:90°
- 6.O:带外壳
- 7.2:2PIN
- 8.T:PA10T
- 9.O:无柱无唛啦
- 10.TYPE 码 01:对插深度加胶0.80mm
- 11.Contact Area plating on contacts 01: G/F

C	CENTER PIN	H65	GOLD FLASH"/Ni 40u"	1
B	SHELL	C5210	Ni 40u"	1
A	HOUSING	PA10T	BLACK	1
no.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 TERMINAL&CONNECTORS		
AO	新图面发行	24.04.24		LINEAR	ANGLES	APPROVED	Frey Yang	22.09.17	J0-4C09DR02T0-0101	ENDE05			
				0.0±0.30	X° REF±6°	DESIGNER	Daniel Dong	22.09.17	TITLE				
				UNIT: MM	0.00±0.25	X° ±3°	DRAWN	CHX	22.09.17	Φ4.0沉板式(CH=0.90) DC POWER JACK			
			SIZE: A4	0.000±0.10	X° X' ±2°					REV	AO	SHEET	1/1