

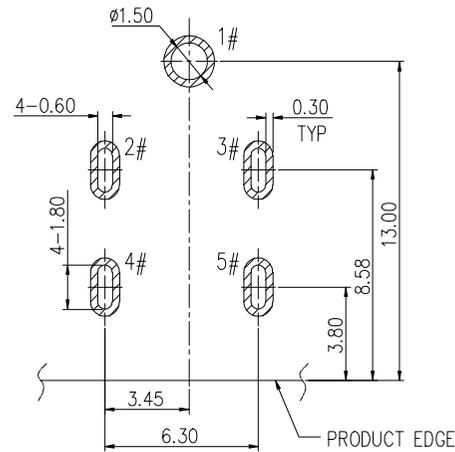
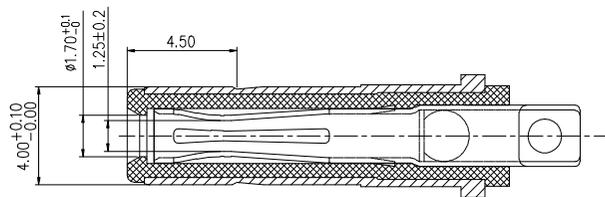

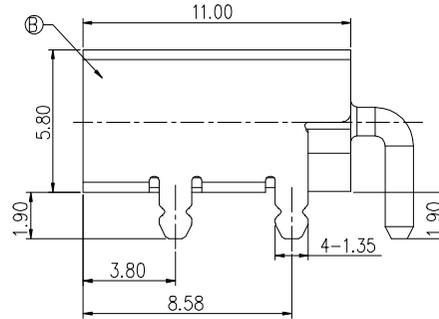


SECTION A-A

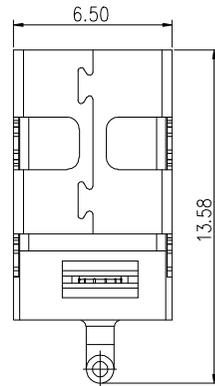

RECOMMENDED PCB LAYOUT(T=1.00)
TOP VIEW TOLERANCE: ±0.05



MATING PLUG

SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

JO-4 E28 D R 0 2 T 0-01 01
1 2 3 4 5 6 7 8 9 10 11



- 1.J0:DC JACK
- 2.4: ∅4.0mm
- 3.E28= 板上中心高2.88mm
- 4.D:DIP
- 5.R: 90°
- 6.0: 带外壳
- 7.2: 2PIN
- 8.T: 10T
9. 柱子/喷啦 0: 无柱无喷啦
- 10.TYPE 码 01:
- 11.Contact Area plating on contacts
01: G/F

SCHEMATIC	
	1# (+)
	2#/3#4#/5# (-)

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	PA10T	BLACK	1

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.				
			LINEAR	ANGLES									
A0	新图面发行	21.09.28	0.0±0.35	X° REF±6°	APPROVED			JO-4E28DR02TO-0101	ENDE05				
A1	换图框发行	24.01.24	0.00±0.25	X° ±3°	DESIGNER			TITLE					
			0.000±0.15	X° X' ±2°	DRAWN	Micky Ma	24.01.24	4.00 mm DC POWER JACK		REV	A1	SHEET	1/1

拉出方向

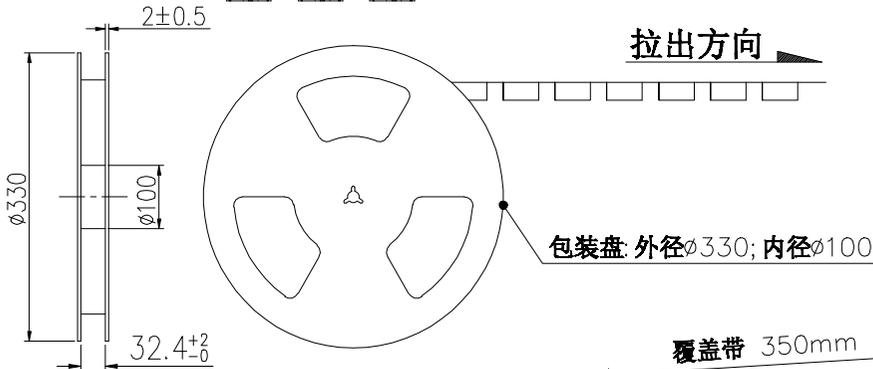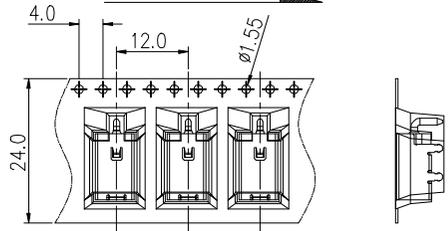

拉出方向

拉出方向

覆盖带 350mm 最少.

尾端 (15空格最少) 产品 前端 (15空格最少)

备注:

1. 材料规格:
 - 1.1 载带: T=0.50mm, 黑色
 - 1.2 包装盘: 蓝色
 - 1.3 纸箱: L=335, W=335, H=380
2. 包装数量:

600PCS/卷, 10卷(6000PCS)/箱
3. 上盖带剥离力: 0.1N~0.7N(10~70gf);
 剥离角度: 165°~180°;
 剥离速度: 300mm/分钟.




总共10层

PE袋

外箱, 1PCS

透明胶带

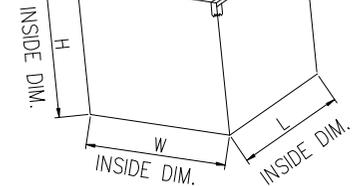

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	新图面发行	21.09.28		LINEAR	ANGLES	1:1								
A1	换图框发行	24.01.24		0.0±0.35	X° REF±6°	APPROVED			J0-4E28DR02T0-0101	ENDE05				
			UNIT: MM	0.00±0.25	X° ±3°	DESIGNER			TITLE					
			SIZE: A4	0.000±0.15	X° X' ±2°	DRAWN	Micky Ma	24.01.24	4.00 mm DC POWER JACK		REV	A1	SHEET	1/1

1

2

3

4

5

6

7

8