


环保物料

SPECIFICATION:




1. RATING: DC 48V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 5N~30N
6. EXTRACTION FORCE: 5N~30N
7. DURABILITY: 10,000 CYCLES

J0-4 E28 D R 0 2 T 0-A1 01
1 2 3 4 5 6 7 8 9 10 11




- 1.J0:DC JACK
- 2.4:φ4.0mm
- 3.E28=板上中心高2.88mm
- 4.D:DIP
- 5.R:90°
- 6.0:带外壳
- 7.2:2PIN
- 8.T:10T
- 9.柱子/唛啦
0:无柱无唛啦
- 10.TYPE 码 A1:脚长0.80mm
- 11.Contact Area plating on contacts
01: G/F

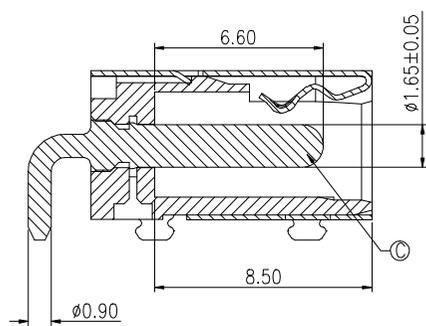


SECTION A-A

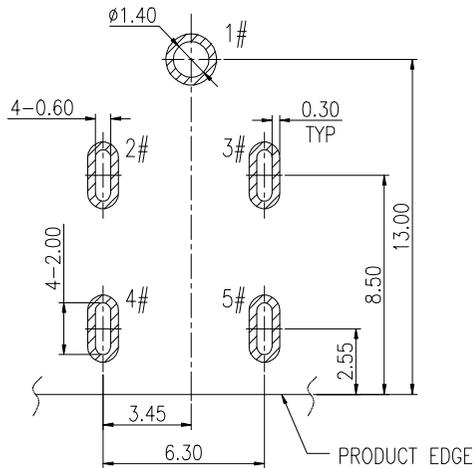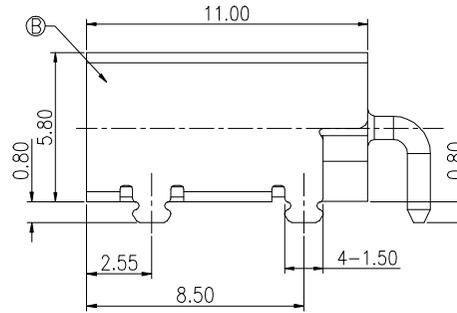

RECOMMENDED PCB LAYOUT(T=1.00)
TOP VIEW TOLERANCE:±0.05

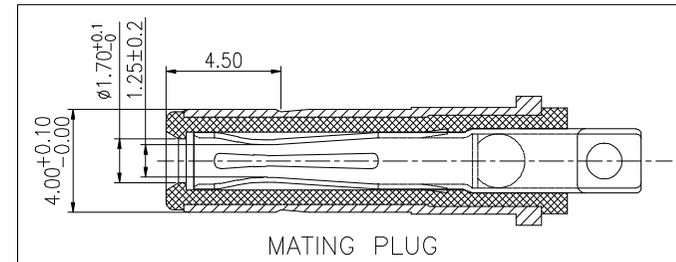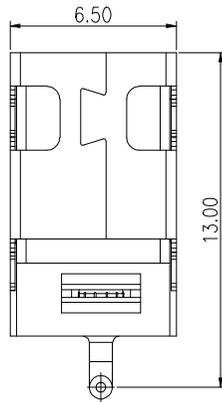

MATING PLUG





C	CENTER PIN	H59	GOLD FLASH"/Ni 40u"	1
B	SHELL	C5210	Ni 40u"	1
A	HOUSING	PA 10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.	JCTC®			
A0	新图面发行	23.12.26	LINEAR	1:1			J0-4E28DR02T0-A101	ENDE05				
			ANGLES	APPROVED			TITLE					
			0.0±0.30 X° REF±6°	DESIGNER			φ4.0板上型 DC POWER JACK					
			0.00±0.20 X° ±3°	DRAWN	Micky Ma	23.12.26						
			0.000±0.10 X° X' ±2°						REV	A0	SHEET	1/1


环保物料

拉出方向

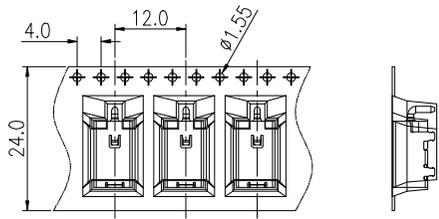


包装盘标签


总共10层

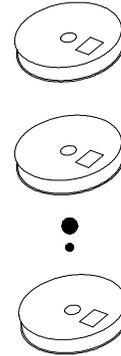



PE袋:



外箱, 1PCS.

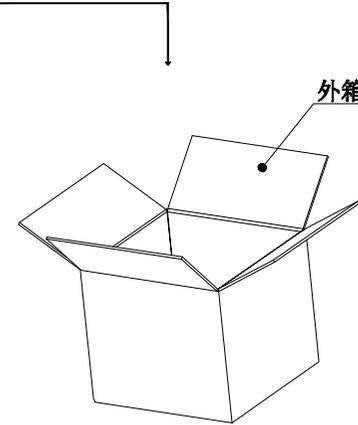

透明胶带

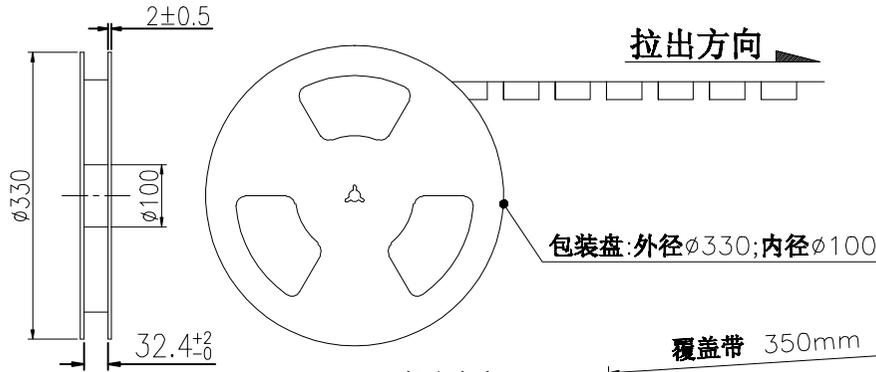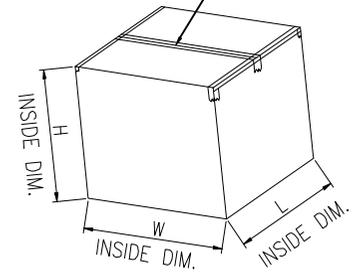

包装盘: 外径 ϕ 330; 内径 ϕ 100

覆盖带 350mm 最少.

拉出方向



备注:

- 材料规格:
 - 1.1 载带: T=0.50mm, 黑色
 - 1.2 包装盘: 蓝色
 - 1.3 纸箱: L=335, W=335, H=380
- 包装数量:
 - 700PCS/卷, 10卷(7000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
 - 拔离角度: 165°~180°;
 - 拔离速度: 300mm/分钟.

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.							
A0	新图面发行	23.12.26		LINEAR	ANGLES	1:1											
			0.00±0.20	X° ±3°	APPROVED			J0-4E28DR02T0-A101	ENDE05								
			0.00±0.10	X° X' ±2°	DESIGNER			TITLE									
			SIZE: A4		DRAWN	Micky Ma	23.12.26	Φ4.0板上型 DC POWER JACK			REV	A0	SHEET	1/1			